




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

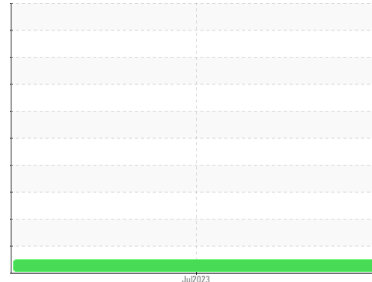

Machine Id
FERRIC PUMP 18

Component
Gearbox
Fluid
SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

Viscosity of sample indicates oil is within SAE 90 range, advise investigate. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0738339	---	---
Sample Date	Client Info		03 Jul 2023	---	---
Machine Age	hrs	Client Info	693	---	---
Oil Age	hrs	Client Info	693	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			NORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m) >200	5	---	---
Chromium	ppm	ASTM D5185(m) >10	0	---	---
Nickel	ppm	ASTM D5185(m) >10	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >25	3	---	---
Lead	ppm	ASTM D5185(m) >50	<1	---	---
Copper	ppm	ASTM D5185(m) >200	<1	---	---
Tin	ppm	ASTM D5185(m) >10	0	---	---
Antimony	ppm	ASTM D5185(m) >5	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 150	213	---	---
Barium	ppm	ASTM D5185(m) 5	0	---	---
Molybdenum	ppm	ASTM D5185(m) 0	<1	---	---
Manganese	ppm	ASTM D5185(m)	<1	---	---
Magnesium	ppm	ASTM D5185(m) 0	<1	---	---
Calcium	ppm	ASTM D5185(m) 20	10	---	---
Phosphorus	ppm	ASTM D5185(m) 1200	1068	---	---
Zinc	ppm	ASTM D5185(m) 25	5	---	---
Sulfur	ppm	ASTM D5185(m) 22000	21150	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	86	---	---
Sodium	ppm	ASTM D5185(m)	2	---	---
Potassium	ppm	ASTM D5185(m) >20	0	---	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual* NONE	NONE	---	---
Yellow Metal	scalar	Visual* NONE	NONE	---	---
Precipitate	scalar	Visual* NONE	NONE	---	---
Silt	scalar	Visual* NONE	NONE	---	---
Debris	scalar	Visual* NONE	NONE	---	---
Sand/Dirt	scalar	Visual* NONE	NONE	---	---
Appearance	scalar	Visual* NORML	NORML	---	---
Odor	scalar	Visual* NORML	NORML	---	---
Emulsified Water	scalar	Visual* >0.2	NEG	---	---
Free Water	scalar	Visual*	NEG	---	---



OIL ANALYSIS REPORT



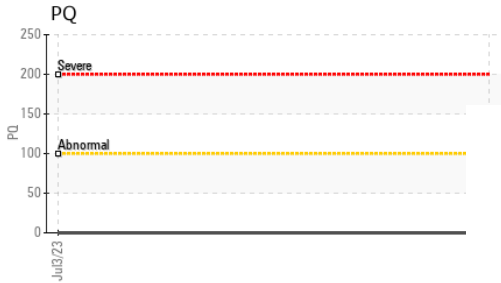
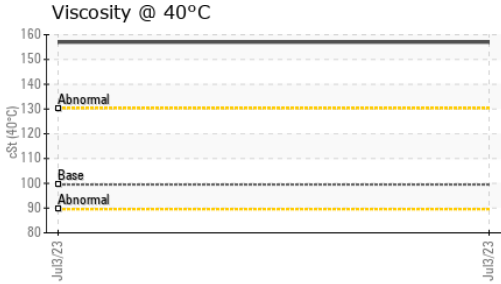


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	99.5	157	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

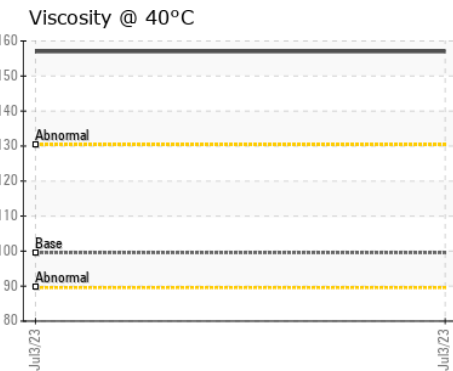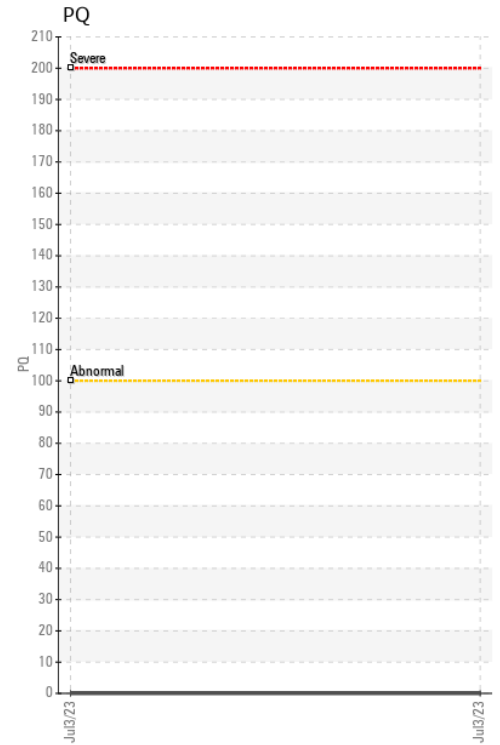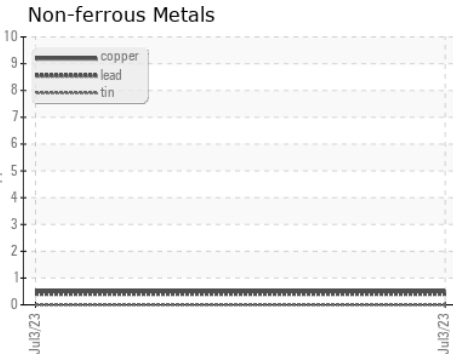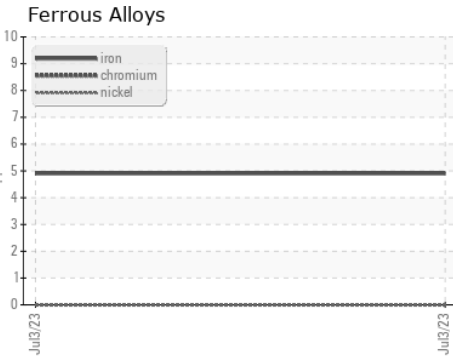

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0738339 **Received** : 30 Aug 2023
Lab Number : 02579509 **Diagnosed** : 31 Aug 2023
Unique Number : 5632569 **Diagnostician** : Kevin Marson
Test Package : FLEET (Additional Tests: PQ)

CRD, Integrated Water Services
 337 Victoria View Road
 Victoria, BC
 CA V9A 3Z3
 Contact: Maintenance Planning
 maintenanceplanning@crd.bc.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.