


PROBLEM SUMMARY

Lemire - M02300 A2308156

Component **Unknown Component** Elui TCS 68 (--- GAL)

COMPONENT CONDITION SUMMARY

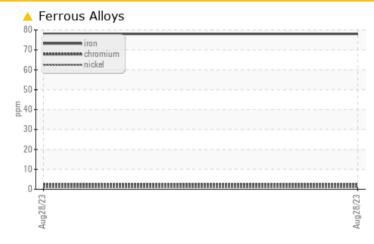

RECOMMENDATION	PROBLEMATIC TEST RESULTS						
This is a baseline read-out on the submitted sample.	Sample Status			ATTENTION			
	Iron	ppm	ASTM D5185(m)	A 78			


Customer Id: CHECOB Sample No.: E30000156 Lab Number: 02579520 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Tatiana Sorkina +1 (800)263-3939 tsorkina@e360s.ca

To change component or sample information: Gloria Gonzalez +1 (289)291-4643 x4643 gloria.gonzalez@wearcheck.com

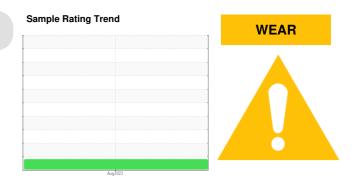

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Area Lemire - M02300 Machine Id A2308156

Component Unknown Component Fluid TCS 68 (--- GAL)

DIAGNOSIS

A Recommendation

This is a baseline read-out on the submitted sample.

🔺 Wear

Aluminum, copper, iron and lead ppm levels are noted.

Contamination

{not applicable}


Fluid Condition


Visc @ 40°C is abnormally low.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		E30000156		
Sample Date		Client Info		28 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	nnm	ASTM D5185(m)				
Chromium	ppm			▲ 78 2		
	ppm	ASTM D5185(m)				
Nickel	ppm	ASTM D5185(m)		1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		29		
Lead	ppm	ASTM D5185(m)		1114		
Copper	ppm	ASTM D5185(m)		73		
Tin	ppm	ASTM D5185(m)		5		
Antimony	ppm	ASTM D5185(m)		1		
Vanadium	ppm	ASTM D5185(m)		<1		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		2		
Molybdenum	ppm	ASTM D5185(m)		<1		
Manganese	ppm	ASTM D5185(m)		608		
Magnesium	ppm	ASTM D5185(m)		36		
Calcium	ppm	ASTM D5185(m)		222		
Phosphorus	ppm	ASTM D5185(m)		380		
Zinc	ppm	ASTM D5185(m)		459		
	pp			439		
Sulfur	nnm	ASTM D5185(m)				
Sulfur Lithium	ppm ppm	ASTM D5185(m)		2687		
Lithium	ppm ppm	ASTM D5185(m)		2687 <1		
Sulfur Lithium CONTAMINANTS		. ,	limit/base	2687 <1 current		
Lithium CONTAMINANTS Silicon		ASTM D5185(m) method ASTM D5185(m)	limit/base	2687 <1 current 33		
Lithium CONTAMINANTS	ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	limit/base	2687 <1 current	 history1	 history2
Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m)	limit/base	2687 <1 current 33	 history1	 history2
Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)		2687 <1 current 33 3	 history1	 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)		2687 <1 current 33 3 <1	 history1 	 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm % ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D6304*		2687 <1 33 3 <1 <1 0.010	 history1 	 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLINI	ppm ppm ppm ppm % ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D6304* ASTM D6304*	>20	2687 <1 33 3 <1 0.010 100.7	 history1 	 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLINI Particles >4µm	ppm ppm ppm ppm % ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D6304* ASTM D6304* ASTM D6304*	>20 limit/base >5000	2687 <1 33 3 <1 0.010 100.7 current	 history1 history1	 history2 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLINI Particles >4µm Particles >6µm	ppm ppm ppm ppm % ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D6304* ASTM D6304* Method ASTM D7647	>20 limit/base >5000	2687 <1 33 3 <1 0.010 100.7 current 729	 history1 history1 	 history2 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLINI Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm % ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5304* ASTM D6304* Method ASTM D7647 ASTM D7647 ASTM D7647	>20 limit/base >5000 >1300 >160	2687 <1 current 33 3 <1 0.010 100.7 current 729 195 10	 history1 history1 	 history2 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLINI Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm % ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5304* ASTM D6304* ASTM D6304* ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>20 limit/base >5000 >1300 >160 >40	2687 <1 current 33 3 <1 0.010 100.7 current 729 195 10 3	 history1 history1 	 history2 history2
Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLINI Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm % ppm	ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5304* ASTM D6304* Method ASTM D7647 ASTM D7647 ASTM D7647	>20 limit/base >5000 >1300 >160	2687 <1 current 33 3 <1 0.010 100.7 current 729 195 10	 history1 history1 	 history2 history2 history2



OIL ANALYSIS REPORT

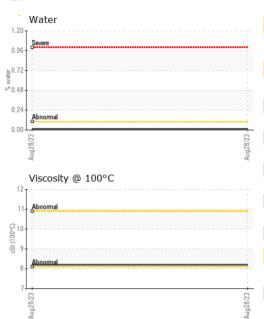

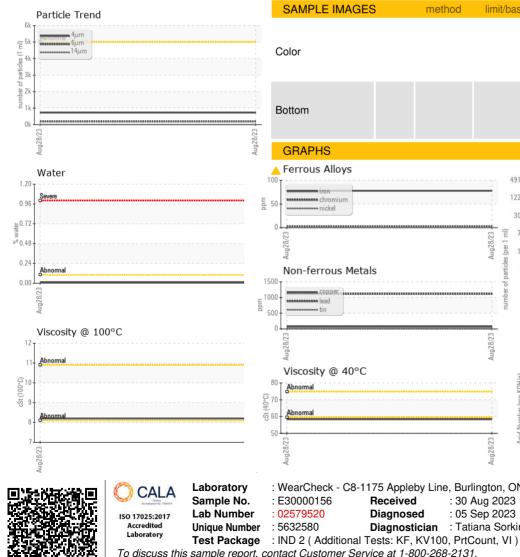

cid Number (AN)	mg KOH/g	ASTM D974*		0.84		
VISUAL	9 - 9	method	limit/base	current	history1	history2
Vhite Metal	ocolor	Visual*	NONE	NONE	motory	Thotory
fellow Metal	scalar scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
silt	scalar	Visual*	NONE	NONE		
)ebris	scalar	Visual*	NONE	NONE		
and/Dirt	scalar	Visual*	NONE	NONE		
ppearance	scalar	Visual*	NORML	NORML		
dor	scalar	Visual*	NORML	NORML		
mulsified Water	scalar	Visual*		NEG		
ree Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
/isc @ 40°C	cSt	ASTM D7279(m)		58.4		
/isc @ 100°C	cSt	ASTM D7279(m)		8.2		
/iscosity Index (VI)	Scale	ASTM D2270*		109		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom				max. 80 °C	no image	no image
GRAPHS						
Ferrous Alloys				Particle Count		
			491,520	I		1 ²⁶
chromium			122,880	Severe		-24
TICKEI			30,720			-22
1/23			EZ 1,680	Abnormal		-20 -18 -16
Aug28/23			Aug28/23 1026/1 ml 1026/1 ml			-18
Non-ferrous Metals	5			· · ·		
conner 1						14
			120 ag mn 30			-14
			8			-10
1/23			3/23			-8
Aug28/23			Aug28/23			6
Viscosity @ 40°C			2	μ 6μ 1	4μ 21μ	38µ 71µ
Abnormal			H 1.0			
Abnomal			ຍິ ພິດ.5	-		
Abnormal			0.1 (mg K0H/g)			
			0.0 4 Acid	/23		
			Aug28/23 Ac	Aug28/23		
Aug28/23						
WearCheck - C8-117					onmental 360	

640 Victoria Street Cobourg, ON CA K9A 5H5 Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950