

# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**3110721821**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

### Wear

Les taux d'usure de tous les composants sont normaux.

### Contamination

Il n'y a aucun indice de contamination dans l'huile.

### Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number      | Client Info |             |            | <b>WA0019715</b>   | ---      | ---      |
| Sample Date        | Client Info |             |            | <b>25 Aug 2023</b> | ---      | ---      |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | ---      | ---      |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | ---      | ---      |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | ---      | ---      |
| Sample Status      |             |             |            | <b>NORMAL</b>      | ---      | ---      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method |        | >5         | <b>&lt;1.0</b> | ---      | ---      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | ---      | ---      |



| WEAR METALS |     | method        | limit/base | current      | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185(m) | >100       | <b>6</b>     | ---      | ---      |
| Chromium    | ppm | ASTM D5185(m) | >20        | <b>0</b>     | ---      | ---      |
| Nickel      | ppm | ASTM D5185(m) | >4         | <b>0</b>     | ---      | ---      |
| Titanium    | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |
| Silver      | ppm | ASTM D5185(m) | >3         | <b>0</b>     | ---      | ---      |
| Aluminum    | ppm | ASTM D5185(m) | >20        | <b>1</b>     | ---      | ---      |
| Lead        | ppm | ASTM D5185(m) | >40        | <b>&lt;1</b> | ---      | ---      |
| Copper      | ppm | ASTM D5185(m) | >330       | <b>&lt;1</b> | ---      | ---      |
| Tin         | ppm | ASTM D5185(m) | >15        | <b>0</b>     | ---      | ---      |
| Antimony    | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |
| Vanadium    | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |
| Beryllium   | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |
| Cadmium     | ppm | ASTM D5185(m) |            | <b>0</b>     | ---      | ---      |

| ADDITIVES  |     | method        | limit/base | current      | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185(m) | 250        | <b>63</b>    | ---      | ---      |
| Barium     | ppm | ASTM D5185(m) | 10         | <b>0</b>     | ---      | ---      |
| Molybdenum | ppm | ASTM D5185(m) | 100        | <b>35</b>    | ---      | ---      |
| Manganese  | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | ---      | ---      |
| Magnesium  | ppm | ASTM D5185(m) | 450        | <b>453</b>   | ---      | ---      |
| Calcium    | ppm | ASTM D5185(m) | 3000       | <b>1483</b>  | ---      | ---      |
| Phosphorus | ppm | ASTM D5185(m) | 1150       | <b>715</b>   | ---      | ---      |
| Zinc       | ppm | ASTM D5185(m) | 1350       | <b>759</b>   | ---      | ---      |
| Sulfur     | ppm | ASTM D5185(m) | 4250       | <b>1983</b>  | ---      | ---      |
| Lithium    | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | ---      | ---      |

| CONTAMINANTS |     | method        | limit/base | current      | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185(m) | >25        | <b>7</b>     | ---      | ---      |
| Sodium       | ppm | ASTM D5185(m) | >158       | <b>4</b>     | ---      | ---      |
| Potassium    | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | ---      | ---      |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | ASTM D7844* | >3         | <b>0</b>    | ---      | ---      |
| Nitration | Abs/cm   | ASTM D7624* | >20        | <b>4.7</b>  | ---      | ---      |
| Sulfation | Abs./1mm | ASTM D7415* | >30        | <b>24.2</b> | ---      | ---      |

# OIL ANALYSIS REPORT







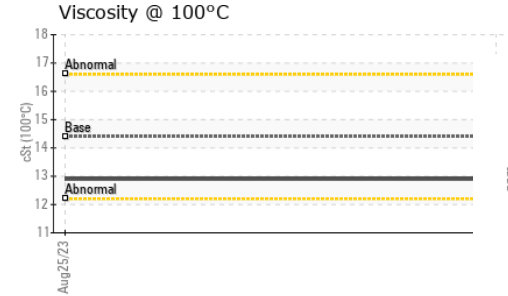
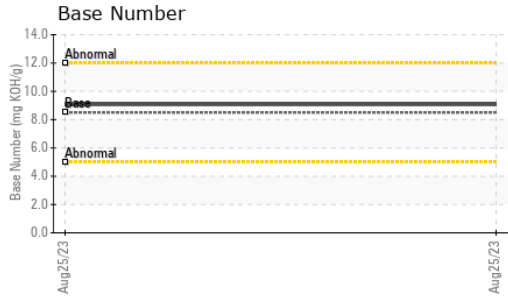


| FLUID DEGRADATION | method   | limit/base  | current | history1 | history2 |
|-------------------|----------|-------------|---------|----------|----------|
| Oxidation         | Abs/.1mm | ASTM D7414* | >25     | 21.4     | ---      |
| Base Number (BN)  | mg KOH/g | ASTM D2896* | 8.5     | 9.07     | ---      |

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Emulsified Water | scalar | Visual*    | >0.2    | NEG      | ---      |
| Free Water       | scalar | Visual*    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base    | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D7279(m) | 14.4    | 12.9     | ---      |

## GRAPHS

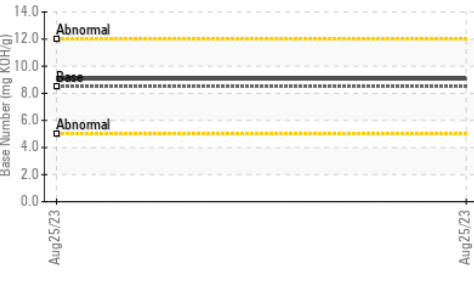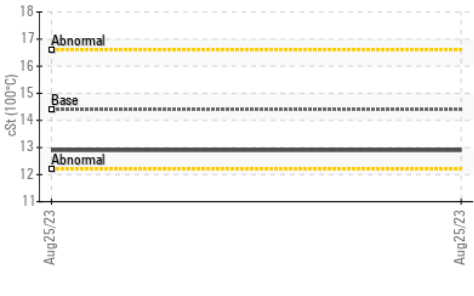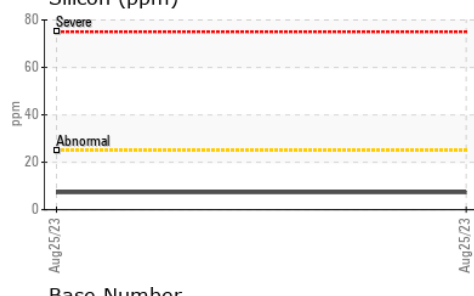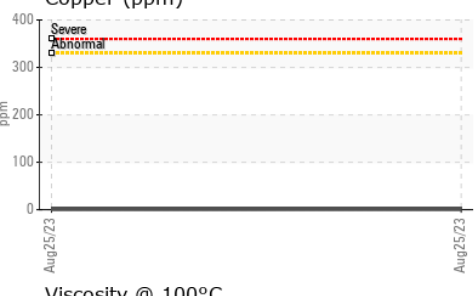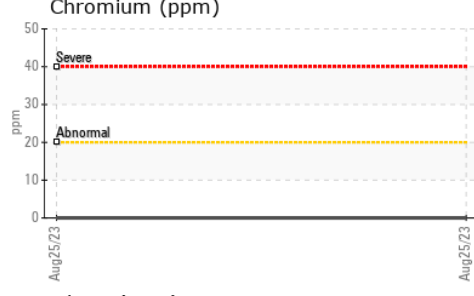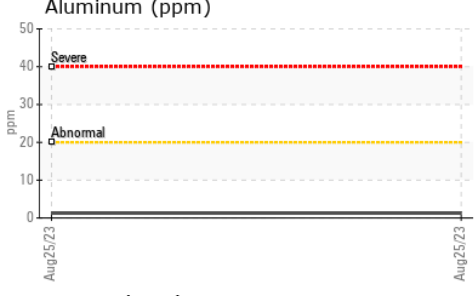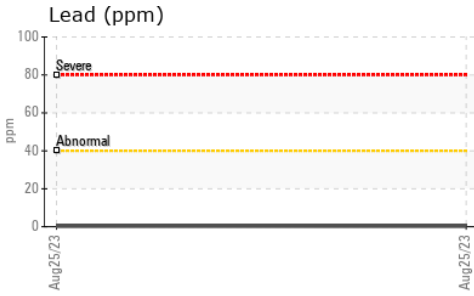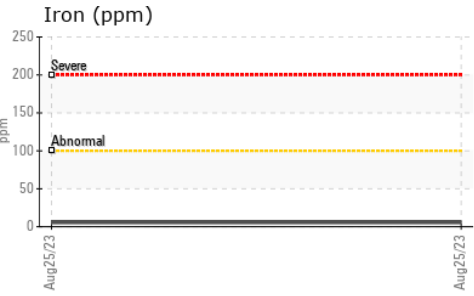

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WA0019715 **Received** : 31 Aug 2023  
**Lab Number** : 02579627 **Diagnosed** : 31 Aug 2023  
**Unique Number** : 5632687 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**Wajax Power Systems**  
 2997 AV. WATT  
 Quebec, QC  
 CA G1X 3W1  
 Contact: Joe Di Pede  
 jdipede@wajax.com  
 T: (418)651-5371  
 F: (418)651-4448

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.