

# **OIL ANALYSIS REPORT**

# TC02 Machine Id TC02 Top 6 Inch Component

Gearbox

SHELL OMALA S2 GX 220 (17 GAL)

# v2011 Aug2012 Oct013 Au2015 Dec016 Sey2018 Feb/020 Sey2021

Sample Rating Trend



### DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. The fluid was specified as SHELL OMALA S2 GX 220, however, a fluid match indicates that this fluid is ISO 220 Gear Oil (Hi Molybdenum). Please confirm the oil type and grade on your next sample. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.


### ▲ Fluid Condition


Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


η2011 Αυμ2012 Οκ2013 Αφ2015 Dκ2016 Sφ2016 Feb2020 Sφ2021						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0841286	WC0754411	WC0664100
Sample Date		Client Info		25 Aug 2023	05 Feb 2023	27 Oct 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	ABNORMAL
CONTAMINATION	٧	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	0	0
Iron	ppm	ASTM D5185(m)	>200	10	10	65
Chromium	ppm	ASTM D5185(m)	>15	0	0	0
Nickel	ppm	ASTM D5185(m)	>15	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	4	18	<1
Lead	ppm	ASTM D5185(m)	>100	2	2	<1
Copper	ppm	ASTM D5185(m)	>200	31	30	<1
Tin	ppm	ASTM D5185(m)	>25	0	0	0
Antimony	ppm	ASTM D5185(m)	>5	0	0	0
Vanadium	ppm	ASTM D5185(m)		<1	<1	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	6.2	<1	<1	0
Barium	ppm	ASTM D5185(m)	0.0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	<b>1834</b>	1949	45
Manganese	ppm	ASTM D5185(m)		<1	<1	<1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1	2
Calcium	ppm	ASTM D5185(m)	0.0	13	13	20
Phosphorus	ppm	ASTM D5185(m)	290	<b>2974</b>	2963	291
Zinc	ppm	ASTM D5185(m)	3.8	<b>1007</b>	1010	66
Sulfur	ppm	ASTM D5185(m)	8167	8305	8581	9640
Lithium	ppm	ASTM D5185(m)		<1	<1	<1
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	30	30	7
Sodium	ppm	ASTM D5185(m)		0	<1	2
Potassium	ppm	ASTM D5185(m)	>20	0	0	0
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		2.72	2.85	0.50




## **OIL ANALYSIS REPORT**

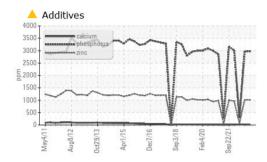








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history1	history2

Visc @ 40°C	cSt	ASTM D7279(m)	220	237	239	▲ 287
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						



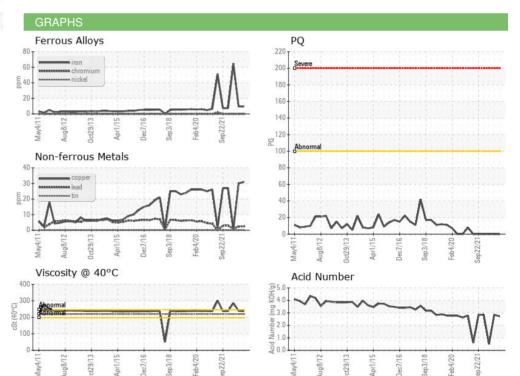



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: WC0841286 Lab Number : 02579777 Unique Number : 5632837

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received **Tested** 

Diagnosed Test Package : IND 2 (Additional Tests: TAN Man)

: 31 Aug 2023 : 01 Sep 2023

: 01 Sep 2023 - Kevin Marson

**Goodyear Napanee** 388 Goodyear Road Napanee, ON

CA K7R 3L2 Contact: Mohammad Waleed Mohammad\_Waleed@goodyear.com

T: (613)354-7709

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

F: (613)354-9377