




# OIL ANALYSIS REPORT

Sample Rating Trend

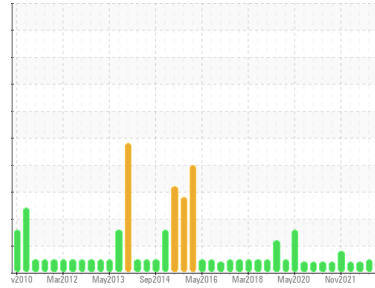

**NORMAL**



Area  
**TC01**  
 Machine Id  
**TC01 Bottom 6 Inch**  
 Component  
**Gearbox**  
 Fluid  
**SHELL OMALA S2 G 320 (40 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0841281</b>	WC22124687	WC0754406
Sample Date	Client Info			<b>25 Aug 2023</b>	03 May 2023	05 Feb 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>5</b>	0	115
Iron	ppm	ASTM D5185(m)	>200	<b>34</b>	27	172
Chromium	ppm	ASTM D5185(m)	>15	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>15	<b>0</b>	<1	1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	4
Lead	ppm	ASTM D5185(m)	>100	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	<1	3
Tin	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5.5	<b>2</b>	2	8
Barium	ppm	ASTM D5185(m)	0.4	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	0.5	<b>46</b>	29	201
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185(m)	23	<b>0</b>	0	1
Calcium	ppm	ASTM D5185(m)	13	<b>6</b>	3	36
Phosphorus	ppm	ASTM D5185(m)	450	<b>291</b>	307	313
Zinc	ppm	ASTM D5185(m)	9.9	<b>19</b>	14	81
Sulfur	ppm	ASTM D5185(m)	8181	<b>9145</b>	9183	9470
Lithium	ppm	ASTM D5185(m)		<b>20</b>	10	▲ 84

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>4</b>	3	10
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	4
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	<1	11

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.21</b>	0.23	0.28




# OIL ANALYSIS REPORT

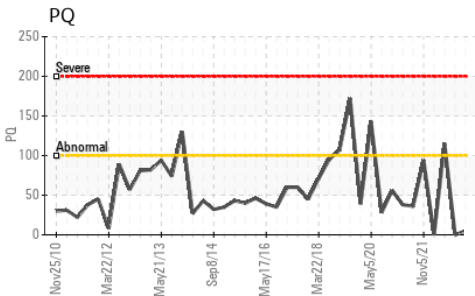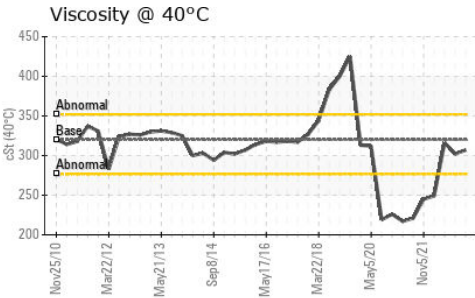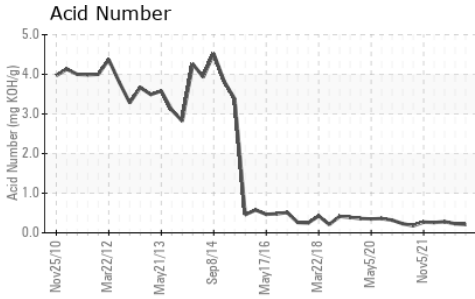






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	320	307	302

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

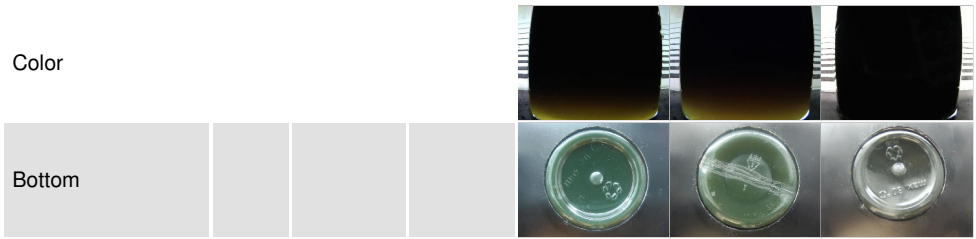

## GRAPHS

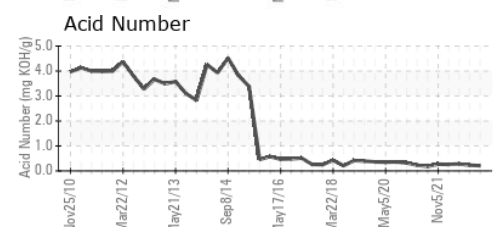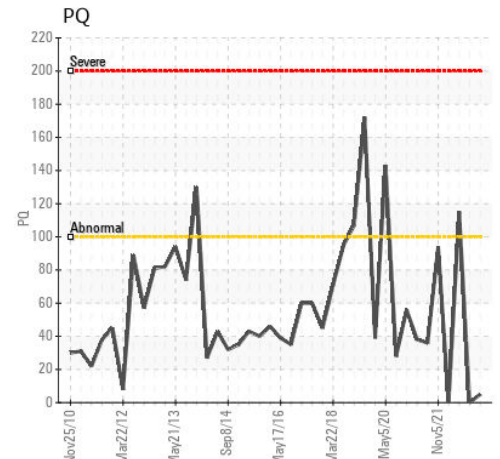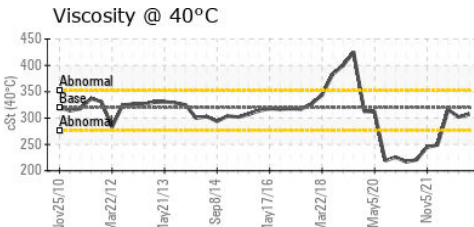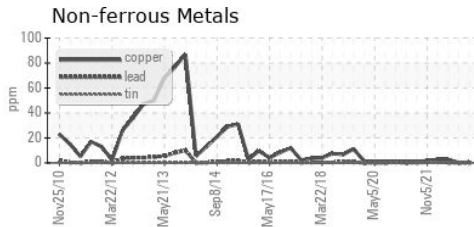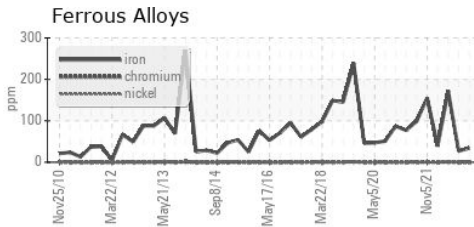

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0841281 **Received** : 31 Aug 2023  
**Lab Number** : 02579786 **Tested** : 01 Sep 2023  
**Unique Number** : 5632846 **Diagnosed** : 01 Sep 2023 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**Goodyear Napanee**  
 388 Goodyear Road  
 Napanee, ON  
 CA K7R 3L2  
 Contact: Grant Cinnamon  
 grant\_cinnamon@goodyear.com  
 T:  
 F: (613)354-9377

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.