




PROBLEM SUMMARY

Sample Rating Trend

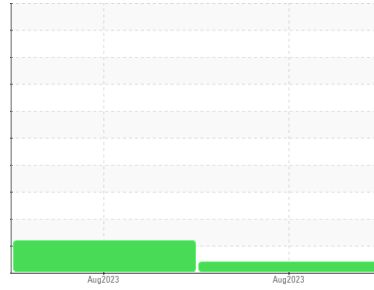


VISCOSITY



Machine Id
AIRBUS N685TA YELLOW
 Component
Hydraulic System
 Fluid
ESSO HYJET IV-A PLUS (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Viscosity @ 40°C

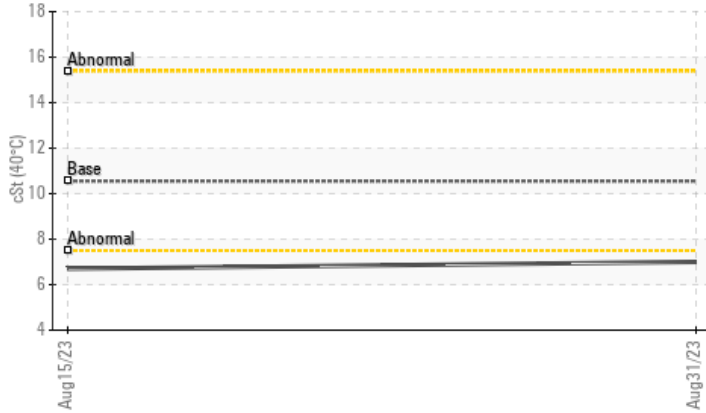

RECOMMENDATION

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

PROBLEMATIC TEST RESULTS

Sample Status	ABNORMAL	ABNORMAL	---
Visc @ 40°C	▲ 7	▲ 6.7	---

Customer Id: KELMOU
 Sample No.: WC0838475
 Lab Number: 02579984
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

HISTORICAL DIAGNOSIS

15 Aug 2023 Diag: Kevin Marson

VISCOSITY



Confirm the source of the lubricant being utilized for top-up/fill. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. NOTE: Not enough sample submitted to perform particle count, therefore fluid cleanliness levels were not determined. All component wear rates are normal. The system cleanliness code is much higher than the acceptable limit for the target ISO 4406 cleanliness code. Viscosity of sample indicates oil is within ISO 7 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The AN level is acceptable for this fluid.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

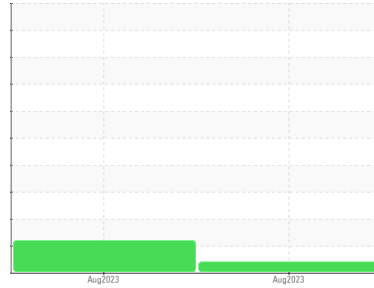

VISCOSITY



Machine Id
AIRBUS N685TA YELLOW
 Component
Hydraulic System
 Fluid
ESSO HYJET IV-A PLUS (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.
 NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Fluid Condition

Viscosity of sample indicates oil is within ISO 7 range, advise investigate. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0838475	WC0838471	---
Sample Date	Client Info	31 Aug 2023	15 Aug 2023	---
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	N/A	N/A	---
Sample Status		ABNORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	2	2
Chromium	ppm	ASTM D5185(m) >10	1	1
Nickel	ppm	ASTM D5185(m) >10	<1	0
Titanium	ppm	ASTM D5185(m)	0	0
Silver	ppm	ASTM D5185(m)	0	<1
Aluminum	ppm	ASTM D5185(m) >10	<1	1
Lead	ppm	ASTM D5185(m) >20	0	0
Copper	ppm	ASTM D5185(m) >20	3	3
Tin	ppm	ASTM D5185(m) >10	0	0
Antimony	ppm	ASTM D5185(m)	0	0
Vanadium	ppm	ASTM D5185(m)	0	0
Beryllium	ppm	ASTM D5185(m)	0	0
Cadmium	ppm	ASTM D5185(m)	6	6

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	1	<1
Barium	ppm	ASTM D5185(m)	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0
Manganese	ppm	ASTM D5185(m)	0	0
Magnesium	ppm	ASTM D5185(m)	1	1
Calcium	ppm	ASTM D5185(m) 110	109	108
Phosphorus	ppm	ASTM D5185(m) 37	27888	▲ 29043
Zinc	ppm	ASTM D5185(m)	5	6
Sulfur	ppm	ASTM D5185(m) 220	352	382
Lithium	ppm	ASTM D5185(m)	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	7	7
Sodium	ppm	ASTM D5185(m)	5	5
Potassium	ppm	ASTM D5185(m) >20	36	38

FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638 >64000	13251	15293
Particles 15-25µm	count	NAS 1638 >11400	356	486
Particles 25-50µm	count	NAS 1638 >2025	87	127
Particles 50-100µm	count	NAS 1638 >360	0	120
Particles >100µm	count	NAS 1638 >64	28	▲ 460
NAS 1638	Class	NAS 1638 >8	7	11


FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.04	0.07	0.41



OIL ANALYSIS REPORT


▲ Viscosity @ 40°C

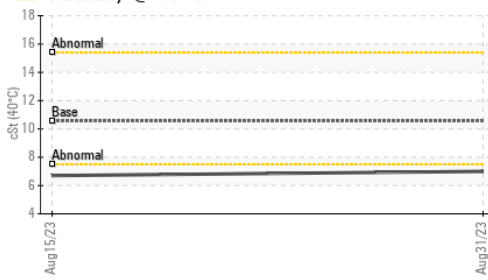






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.750	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	10.55	▲ 7	▲ 6.7	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

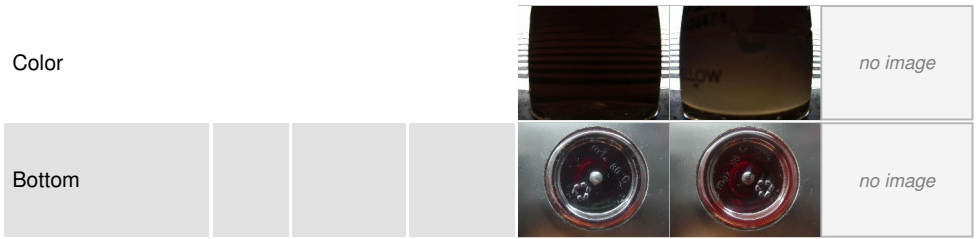

GRAPHS

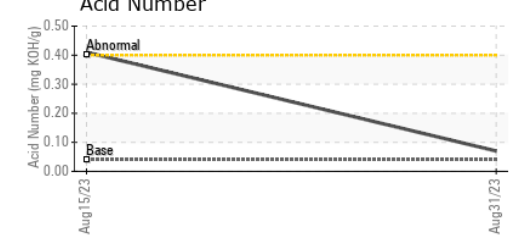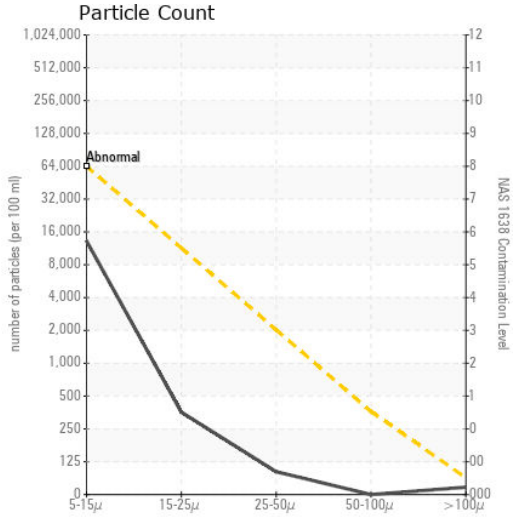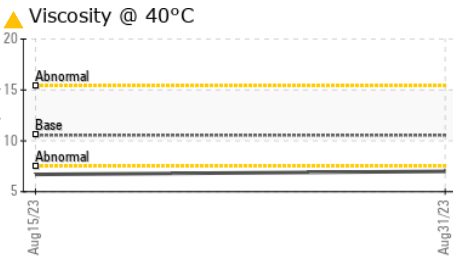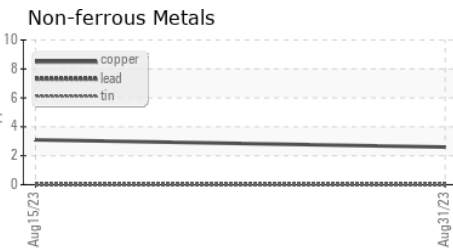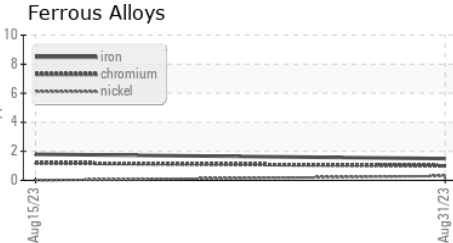

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0838475 **Received** : 01 Sep 2023
Lab Number : 02579984 **Diagnosed** : 01 Sep 2023
Unique Number : 5633044 **Diagnostician** : Kevin Marson
Test Package : IND 2 (Additional Tests: PrtCountNAS, TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

KF Aero
 9500 Airport Road
 Mount Hope, ON
 CA L0R 1W0
 Contact: Helen Krzywicki
 h.krzywicki@kfaero.ca
 T: (905)679-3313
 F: (905)679-4921