

Machine Id
PRESS39DECOILER
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using IND 2 test kits, this testkit includes Particle Count to determine the ISO cleanliness of the fluid. this testkit includes AN to determine the suitability of the oil for continued use.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component(unconfirmed).

Fluid Condition

Viscosity of sample indicates oil is within ISO 46 range, advise investigate. The condition of the oil is acceptable for the time in service (unconfirmed).

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			AW0004009	AW0003964	AW0003799
Sample Date	Client Info			29 Aug 2023	26 May 2022	23 Jul 2020
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Not Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	4	4	4
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	0	0
Lead	ppm	ASTM D5185(m)	>20	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>20	4	3	3
Tin	ppm	ASTM D5185(m)	>20	0	<1	0
Antimony	ppm	ASTM D5185(m)		0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	0	<1	<1
Barium	ppm	ASTM D5185(m)	5	0	0	0
Molybdenum	ppm	ASTM D5185(m)	5	0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	25	2	1	2
Calcium	ppm	ASTM D5185(m)	200	50	51	51
Phosphorus	ppm	ASTM D5185(m)	300	290	290	281
Zinc	ppm	ASTM D5185(m)	370	330	335	334
Sulfur	ppm	ASTM D5185(m)	2500	3536	3666	3608
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1	<1	<1
Sodium	ppm	ASTM D5185(m)		<1	0	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	1	1






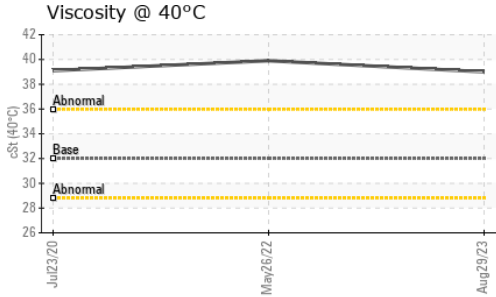

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	VLITE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

OIL ANALYSIS REPORT






FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	32	39.0	39.9	39.1

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color						
Bottom						
PrtFilter					no image	no image

GRAPHS

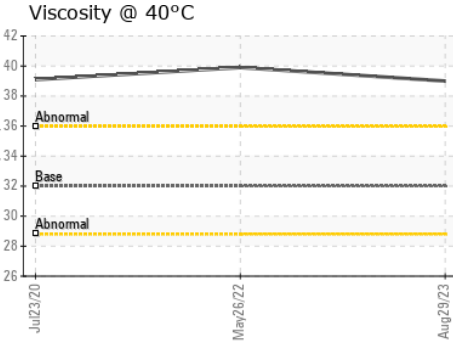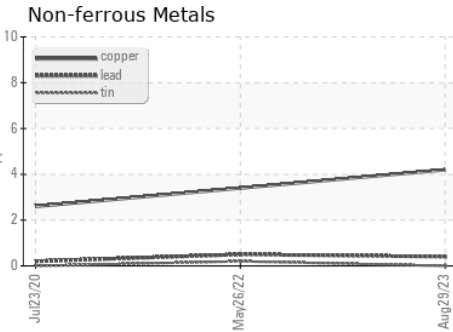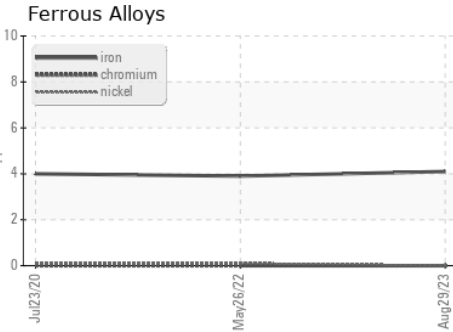

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : AW0004009 **Received** : 01 Sep 2023
Lab Number : 02580031 **Diagnosed** : 07 Sep 2023
Unique Number : 5633091 **Diagnostician** : Kevin Marson
Test Package : IND 1 (Additional Tests: Bottom, BottomAnalysis, FilterPatch)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

MARTINREA INTERNATIONAL
 30 AVIVA PARK DRIVE
 VAUGHAN, ON
 CA L4L 9C7
 Contact: Ken Young
 ken.young@martinrea.com
 T: (905)264-0149
 F: (416)264-1828