




PROBLEM SUMMARY

Sample Rating Trend


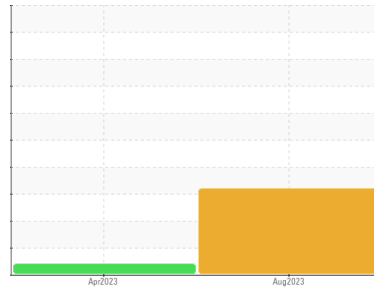


DIRT



Machine Id
[N880WM] DEHAVILLAND DASH 8 Q400 N880WM SYS #3
 Component
3 Hydraulic System
 Fluid
SKYDROL LD-4 (2 LTR)

COMPONENT CONDITION SUMMARY

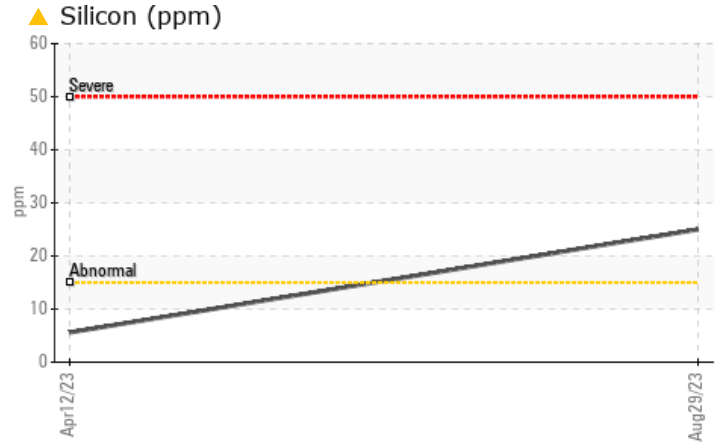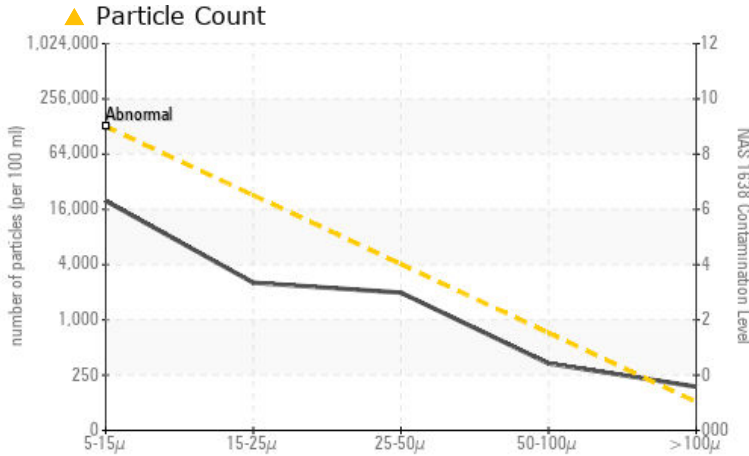

RECOMMENDATION

Check seals and/or filters for points of contaminant entry. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status	Scale	ASTM	Value	ABNORMAL	ABNORMAL	---
Ferrous Sliding	Scale 0-10	ASTM D7684*	1	▲ 1		
Silicon	ppm	ASTM D5185(m)	>15	▲ 25	6	---
Particles >100µm	count	NAS 1638	>128	▲ 187	27	---

Customer Id: SMABRI
 Sample No.: WC0848073
 Lab Number: 02580153
 Test Package: AVI 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Seals	---	---	?	Check seals and/or filters for points of contaminant entry.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

HISTORICAL DIAGNOSIS

12 Apr 2023 Diag: Kevin Marson

ISO



We recommend you service the filters on this component. We recommend an early resample to monitor this condition. All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The water content is negligible. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

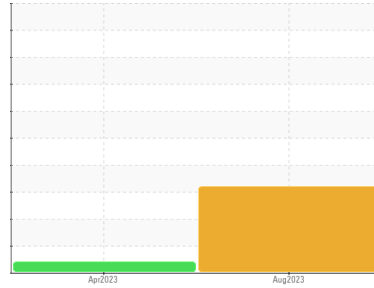

DIRT



Machine Id
[N880WM] DEHAVILLAND DASH 8 Q400 N880WM SYS #3
 Component
3 Hydraulic System
 Fluid
SKYDROL LD-4 (2 LTR)

DIAGNOSIS

Recommendation

Check seals and/or filters for points of contaminant entry. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition.

Wear

Wear particle analysis indicates that the ferrous sliding particles are marginal. All other component wear rates are normal.

Contaminants

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material and/or dirt. The water content is negligible.

Oil Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0848073	WC0799555	---
Sample Date	Client Info		29 Aug 2023	12 Apr 2023	---
TSN	hrs	Client Info	0	0	---
TSO	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed		Client Info	N/A	N/A	---
Sample Status			ABNORMAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	<1	0	---
Chromium	ppm	ASTM D5185(m) >10	0	0	---
Nickel	ppm	ASTM D5185(m) >10	<1	<1	---
Titanium	ppm	ASTM D5185(m)	0	0	---
Silver	ppm	ASTM D5185(m)	0	0	---
Aluminum	ppm	ASTM D5185(m) >10	<1	0	---
Lead	ppm	ASTM D5185(m) >20	0	0	---
Copper	ppm	ASTM D5185(m) >20	<1	0	---
Tin	ppm	ASTM D5185(m) >10	0	0	---
Antimony	ppm	ASTM D5185(m)	0	0	---
Vanadium	ppm	ASTM D5185(m)	0	0	---
Beryllium	ppm	ASTM D5185(m)	0	0	---
Cadmium	ppm	ASTM D5185(m)	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 0	1	3	---
Barium	ppm	ASTM D5185(m) 0	0	0	---
Molybdenum	ppm	ASTM D5185(m) 0	0	0	---
Manganese	ppm	ASTM D5185(m)	0	0	---
Magnesium	ppm	ASTM D5185(m) 0	<1	0	---
Calcium	ppm	ASTM D5185(m) 0	2	0	---
Phosphorus	ppm	ASTM D5185(m) 20000	28009	30899	---
Zinc	ppm	ASTM D5185(m) 0	2	<1	---
Sulfur	ppm	ASTM D5185(m) 1900	1530	1667	---
Lithium	ppm	ASTM D5185(m)	<1	<1	---

CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	▲ 25	6	---
Sodium	ppm	ASTM D5185(m)	2	2	---
Potassium	ppm	ASTM D5185(m) >20	17	18	---
Water	%	ASTM D6304* >0.6	0.167	0.497	---
ppm Water	ppm	ASTM D6304* >6000	1677.6	4979.4	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638 >128000	19853	▲ 193419	---
Particles 15-25µm	count	NAS 1638 >22800	2540	8666	---
Particles 25-50µm	count	NAS 1638 >4050	1980	1533	---
Particles 50-100µm	count	NAS 1638 >720	335	100	---
Particles >100µm	count	NAS 1638 >128	▲ 187	27	---
NAS 1638	Class	NAS 1638 >9	10	10	---



OIL ANALYSIS REPORT

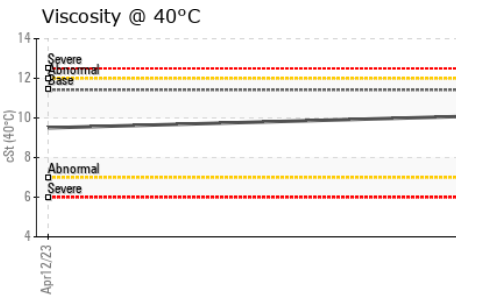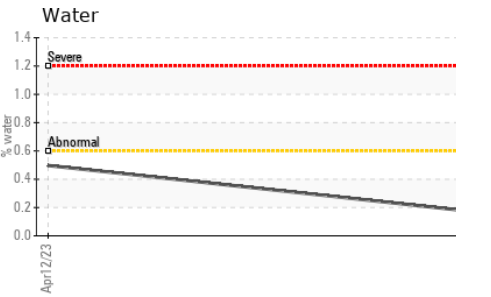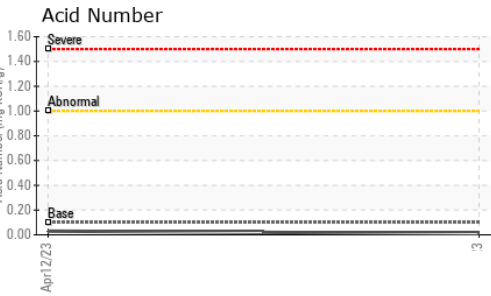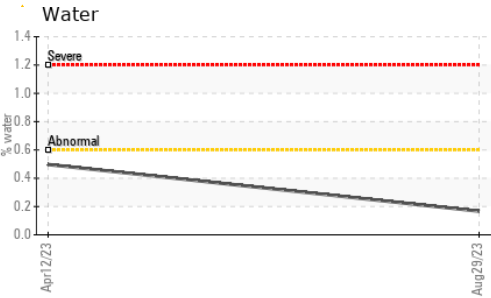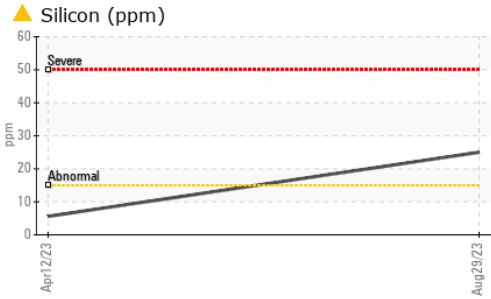

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.10	0.01	0.03	---






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.6	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	11.42	10.1	9.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------



GRAPHS

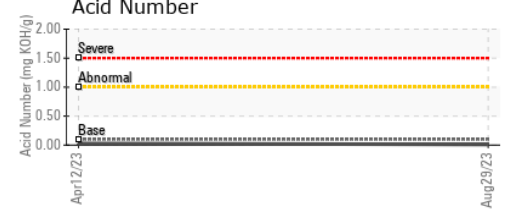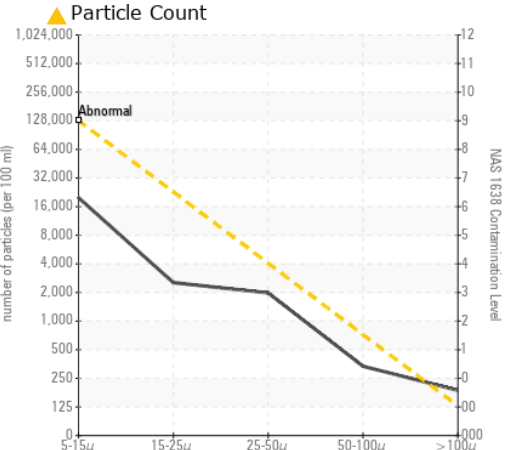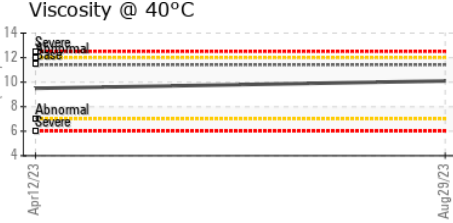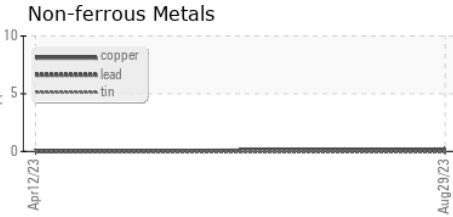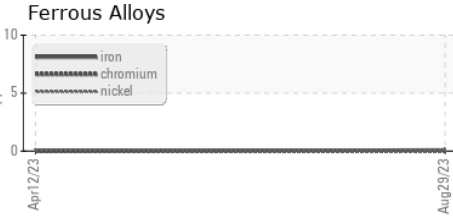

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0848073 **Received** : 01 Sep 2023
Lab Number : **02580153** **Diagnosed** : 08 Sep 2023
Unique Number : 5633213 **Diagnostician** : Kevin Marson
Test Package : AVI 3 (Additional Tests: KF, PrtCount)




SMART AVIATION
 775 COUNTY ROAD 64
 BRIGHTON, ON
 CA K0K 1H0
 Contact: Mark Rinaldi
 mark.rinaldi@smartams.ca
 T: (343)645-4361
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.



FERROGRAPHY REPORT

Machine Id
[N880WM] DEHAVILLAND DASH 8 Q400 N880WM SYS #3
 Component
3 Hydraulic System
 Fluid
SKYDROL LD-4 (2 LTR)

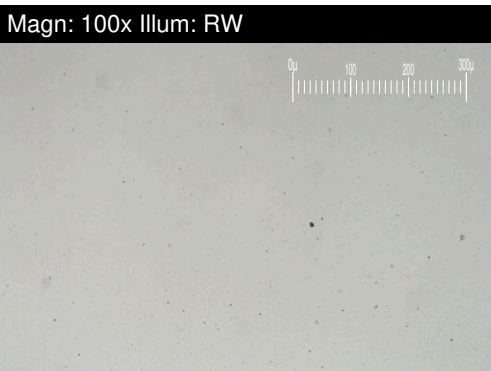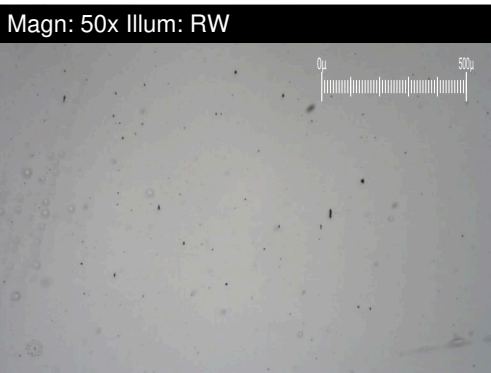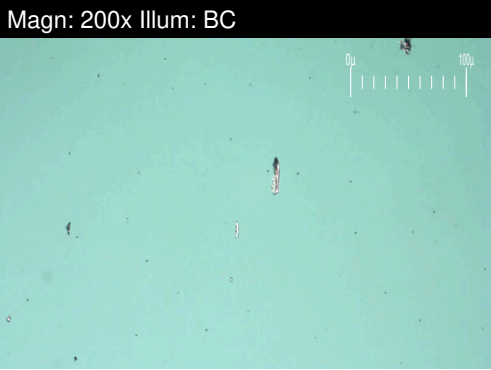


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		5.4	0.2	---
Small Particles		DR-Ferr*		1.8	0.1	---
Total Particles		DR-Ferr*	>---	7.2	0.3	---
Large Particles Percentage	%	DR-Ferr*		50	33.3	---
Severity Index		DR-Ferr*		19	0	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		1	1	
Ferrous Sliding	Scale 0-10	ASTM D7684*		1		
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		1	1	
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1		
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	

WEAR

Wear particle analysis indicates that the ferrous sliding particles are marginal. All other component wear rates are normal.

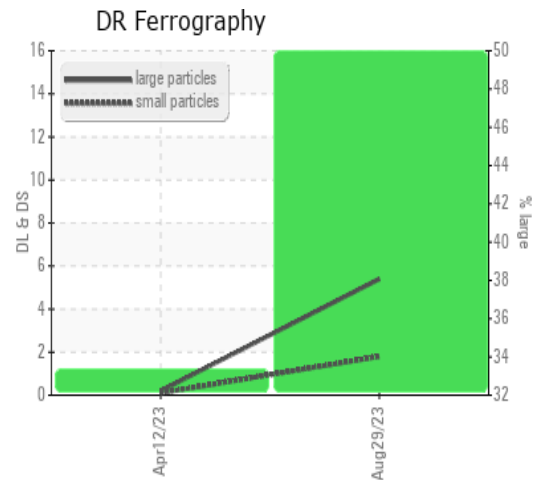

This page left intentionally blank