




PROBLEM SUMMARY

Sample Rating Trend

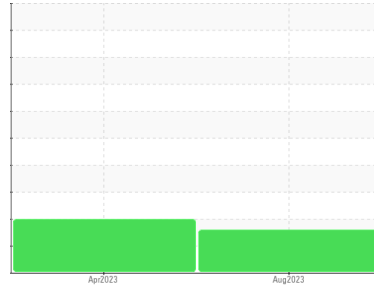

WEAR PARTICLES



Machine Id
[N880WM] DEHAVILLAND DASH 8 Q400 N880WM SYS #2
 Component
2 Hydraulic System
 Fluid
SKYDROL LD-4 (11 LTR)

COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

We recommend an early resample to monitor this condition. No other corrective action is recommended at this time.

PROBLEMATIC TEST RESULTS

Sample Status	Scale	ASTM	MARGINAL	ABNORMAL	---
Ferrous Rolling	Scale 0-10	ASTM D7684*	▲ 2	■ 1	

Customer Id: SMABRI
 Sample No.: WC0851296
 Lab Number: 02580155
 Test Package: AVI 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

12 Apr 2023 Diag: Kevin Marson

ISO



We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system. There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The water content is negligible. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

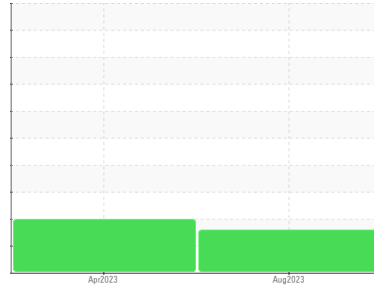

WEAR PARTICLES



Machine Id
[N880WM] DEHAVILLAND DASH 8 Q400 N880WM SYS #2
 Component
2 Hydraulic System
 Fluid
SKYDROL LD-4 (11 LTR)

DIAGNOSIS

▲ Recommendation

We recommend an early resample to monitor this condition. No other corrective action is recommended at this time.

▲ Wear

Wear particle analysis indicates that the ferrous rolling particles are marginal. All other component wear rates are normal.

Contaminants

The water content is negligible. There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0851296	WC0799554	---
Sample Date	Client Info		29 Aug 2023	12 Apr 2023	---
TSN	hrs	Client Info	0	0	---
TSO	hrs	Client Info	0	0	---
Oil Age	hrs	Client Info	0	0	---
Oil Changed		Client Info	N/A	N/A	---
Sample Status			MARGINAL	ABNORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	1	2
Chromium	ppm	ASTM D5185(m)	>10	0	0
Nickel	ppm	ASTM D5185(m)	>10	0	<1
Titanium	ppm	ASTM D5185(m)		0	0
Silver	ppm	ASTM D5185(m)		0	0
Aluminum	ppm	ASTM D5185(m)	>10	<1	<1
Lead	ppm	ASTM D5185(m)	>20	<1	<1
Copper	ppm	ASTM D5185(m)	>20	5	9
Tin	ppm	ASTM D5185(m)	>10	0	<1
Antimony	ppm	ASTM D5185(m)		0	<1
Vanadium	ppm	ASTM D5185(m)		0	0
Beryllium	ppm	ASTM D5185(m)		0	0
Cadmium	ppm	ASTM D5185(m)		<1	1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	<1	3
Barium	ppm	ASTM D5185(m)	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	0
Manganese	ppm	ASTM D5185(m)		0	<1
Magnesium	ppm	ASTM D5185(m)	0	<1	<1
Calcium	ppm	ASTM D5185(m)	0	5	6
Phosphorus	ppm	ASTM D5185(m)	20000	27980	31295
Zinc	ppm	ASTM D5185(m)	0	6	8
Sulfur	ppm	ASTM D5185(m)	1900	1511	1585
Lithium	ppm	ASTM D5185(m)		<1	<1

CONTAMINANTS





	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	4	4
Sodium	ppm	ASTM D5185(m)		3	4
Potassium	ppm	ASTM D5185(m)	>20	20	20
Water	%	ASTM D6304*	>0.6	0.141	0.532
ppm Water	ppm	ASTM D6304*	>6000	1413.7	5329.8

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>128000	20173	▲ 500259
Particles 15-25µm	count	NAS 1638	>22800	713	▲ 41039
Particles 25-50µm	count	NAS 1638	>4050	327	▲ 22793
Particles 50-100µm	count	NAS 1638	>720	14	▲ 1960
Particles >100µm	count	NAS 1638	>128	13	▲ 487
NAS 1638	Class	NAS 1638	>9	7	12



OIL ANALYSIS REPORT

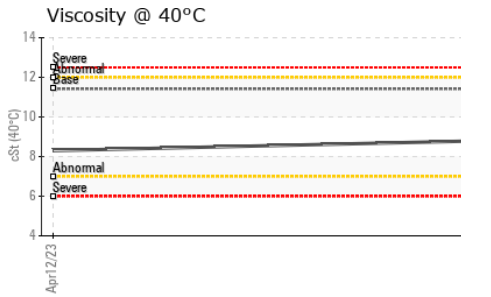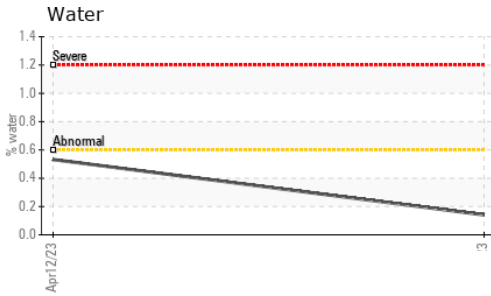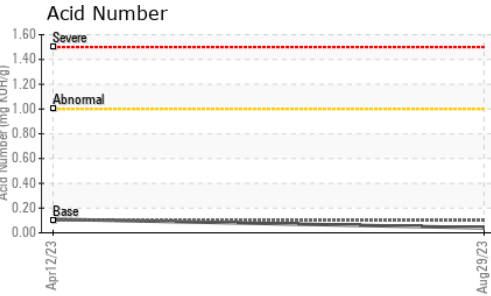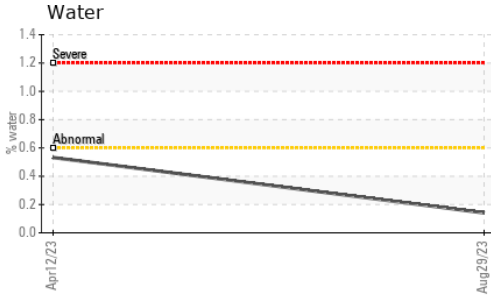


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.10	0.04	0.11	---






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.6	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	11.42	8.8	8.3	---

SAMPLE IMAGES

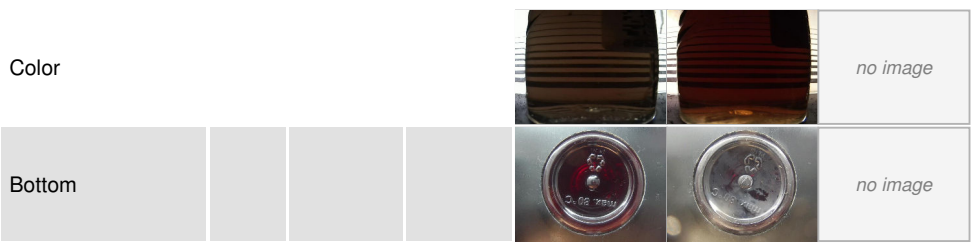

GRAPHS

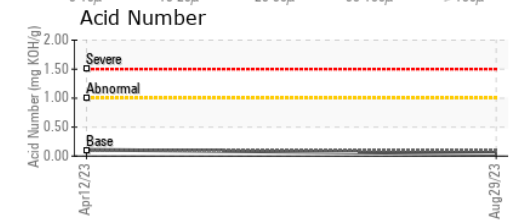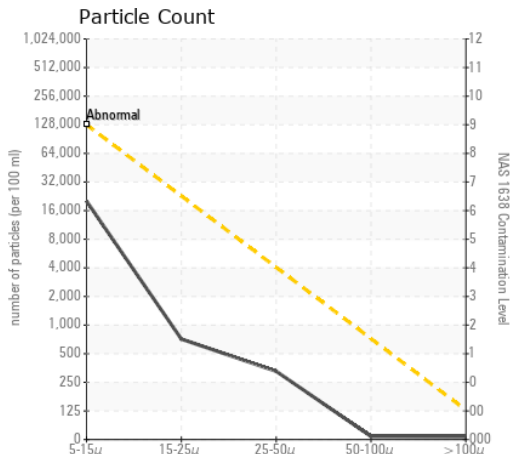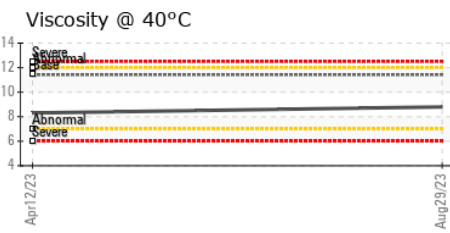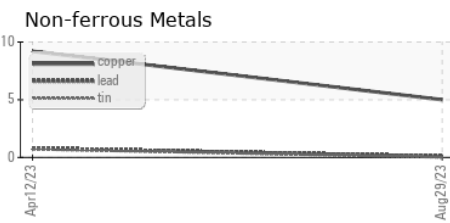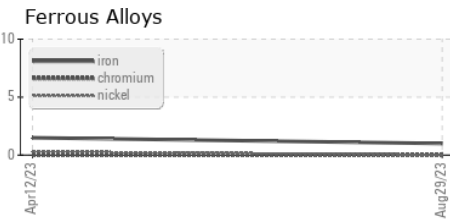




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0851296 **Received** : 01 Sep 2023
Lab Number : 02580155 **Diagnosed** : 07 Sep 2023
Unique Number : 5633215 **Diagnostician** : Kevin Marson
Test Package : AVI 3 (Additional Tests: KF, PrtCount)

SMART AVIATION
 775 COUNTY ROAD 64
 BRIGHTON, ON
 CA K0K 1H0
 Contact: Mark Rinaldi
 mark.rinaldi@smartams.ca
 T: (343)645-4361
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Machine Id
[N880WM] DEHAVILLAND DASH 8 Q400 N880WM SYS #2
 Component
2 Hydraulic System
 Fluid
SKYDROL LD-4 (11 LTR)

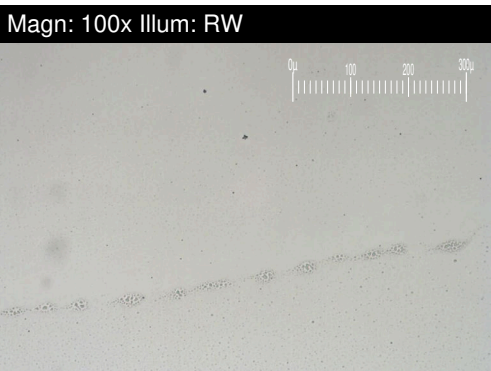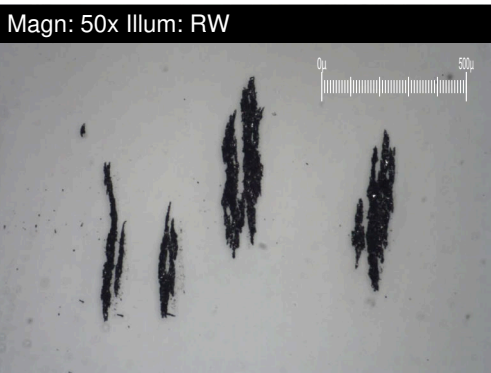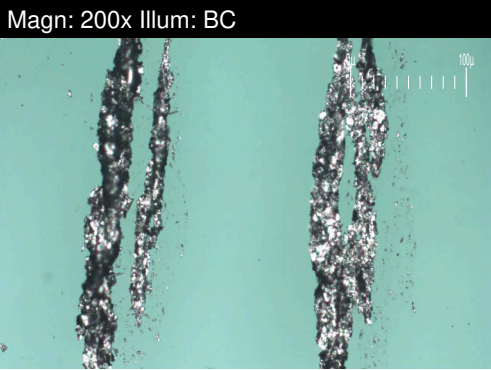


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		2.6	8.6	---
Small Particles		DR-Ferr*		0.7	0.5	---
Total Particles		DR-Ferr*	>---	3.3	9.1	---
Large Particles Percentage	%	DR-Ferr*		57.6	89	---
Severity Index		DR-Ferr*		5	70	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		3	2	
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		▲ 2	1	
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		1	1	

WEAR

Wear particle analysis indicates that the ferrous rolling particles are marginal. All other component wear rates are normal.

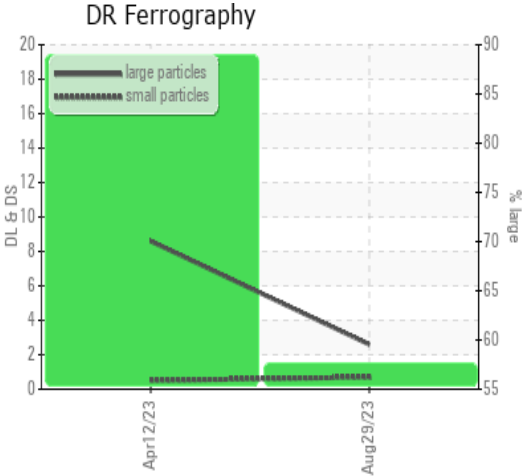

This page left intentionally blank