




# OIL ANALYSIS REPORT

Sample Rating Trend

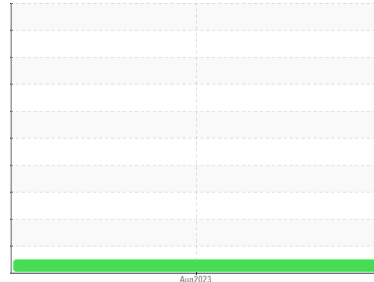

**NORMAL**



Machine Id  
**JOHN DEERE OCW14**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0836826</b>	---	---
Sample Date	Client Info			<b>23 Aug 2023</b>	---	---
Machine Age	hrs	Client Info		<b>148</b>	---	---
Oil Age	hrs	Client Info		<b>42</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>2.1	<b>&lt;1.0</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	<b>1</b>	---	---
Chromium	ppm	ASTM D5185(m)	>11	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>31	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>26	<b>3</b>	---	---
Copper	ppm	ASTM D5185(m)	>26	<b>30</b>	---	---
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>5</b>	---	---
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	100	<b>11</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	450	<b>115</b>	---	---
Calcium	ppm	ASTM D5185(m)	3000	<b>1963</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	<b>883</b>	---	---
Zinc	ppm	ASTM D5185(m)	1350	<b>878</b>	---	---
Sulfur	ppm	ASTM D5185(m)	4250	<b>2714</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	<b>2</b>	---	---
Sodium	ppm	ASTM D5185(m)	>158	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>4.8</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.1</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>14.7</b>	---	---











# OIL ANALYSIS REPORT

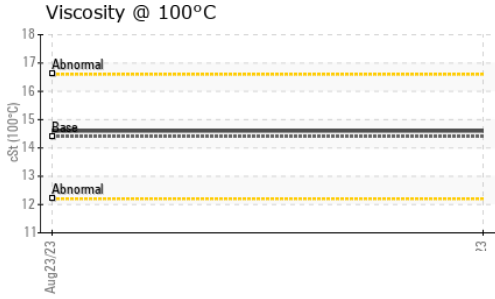

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.21	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>14.6</b>	---

## GRAPHS

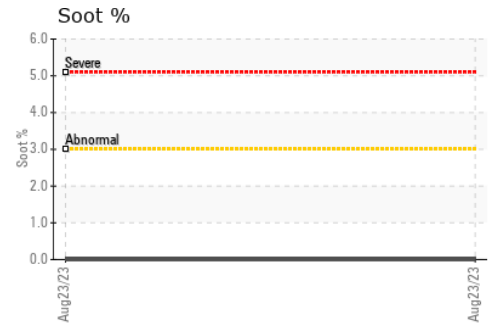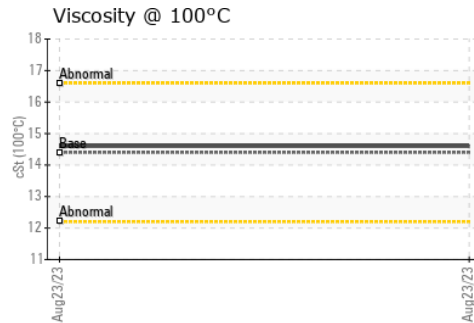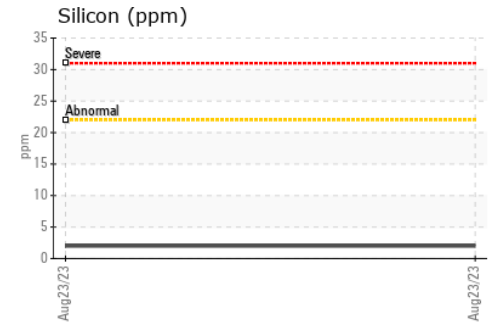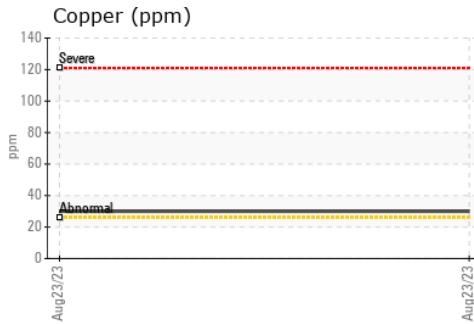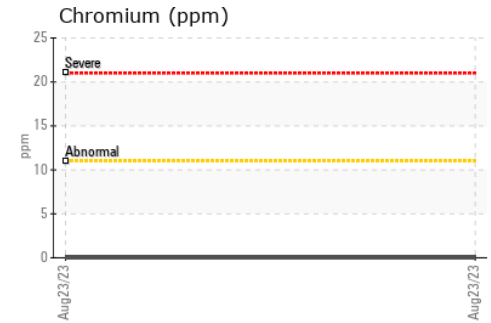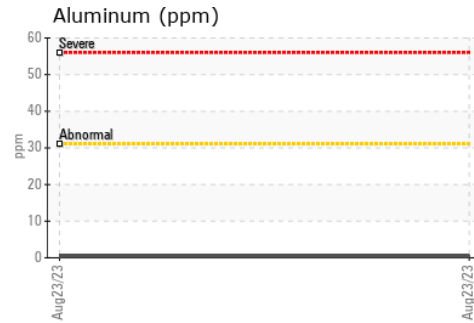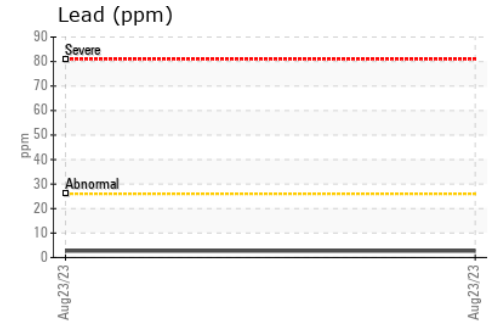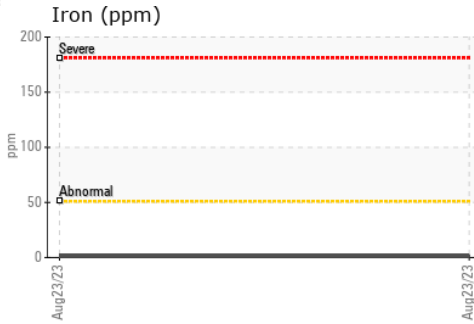

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0836826      **Received** : 05 Sep 2023  
**Lab Number** : 02580199      **Diagnosed** : 05 Sep 2023  
**Unique Number** : 5633259      **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**GENCARE SERVICES LTD.**  
 360 SOVEREIGN ROAD  
 LONDON, ON  
 CA N6M 1A8  
 Contact: Teresa Matthews  
 tmatthews@gencare.com  
 T: (519)659-7118  
 F: (519)451-1707

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.