




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

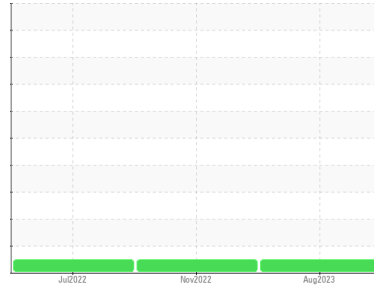

Area  
**(C-FSPN)**  
 Machine Id  
**[C-FSPN] SANDVIK B200 PCE-PJ1252**  
 Component  
**Left Jet Turbine**  
 Fluid  
**BP TURBO OIL 2380 (14 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

### Contaminants

The water content is negligible. There is no indication of any contamination in the oil.

### Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0850516</b>	WC0761441	WC0721700
Sample Date	Client Info	<b>27 Aug 2023</b>	25 Nov 2022	18 Jul 2022
TSN	hrs Client Info	<b>7061</b>	6860	6671
TSO	hrs Client Info	<b>2192</b>	1991	1801
Oil Age	hrs Client Info	<b>2192</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >8	<b>0</b>	0	<1
Chromium	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Nickel	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm ASTM D5185(m) >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Lead	ppm ASTM D5185(m) >3	<b>0</b>	0	0
Copper	ppm ASTM D5185(m) >3	<b>&lt;1</b>	0	0
Tin	ppm ASTM D5185(m) >2	<b>0</b>	<1	0
Antimony	ppm ASTM D5185(m)	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 0	<b>&lt;1</b>	<1	<1
Barium	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Manganese	ppm ASTM D5185(m)	<b>0</b>	0	0
Magnesium	ppm ASTM D5185(m) 0	<b>&lt;1</b>	<1	4
Calcium	ppm ASTM D5185(m) 0	<b>0</b>	0	0
Phosphorus	ppm ASTM D5185(m) 2500	<b>2844</b>	2766	1073
Zinc	ppm ASTM D5185(m) 0	<b>2</b>	<1	2
Sulfur	ppm ASTM D5185(m) 0	<b>2</b>	2	2
Lithium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS





method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >8	<b>&lt;1</b>	0	<1
Sodium	ppm ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Potassium	ppm ASTM D5185(m) >20	<b>&lt;1</b>	0	0
Water	% ASTM D6304* >0.1	<b>0.071</b>	0.035	0.115
ppm Water	ppm ASTM D6304* >1000	<b>711.3</b>	354.3	1158.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974* 0.43	<b>0.20</b>	0.30	0.04




# OIL ANALYSIS REPORT

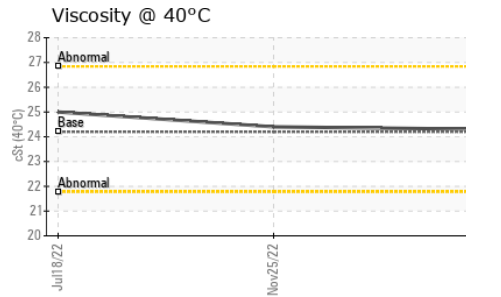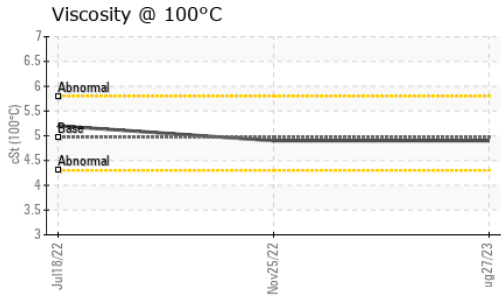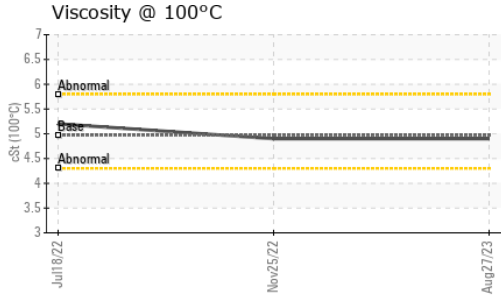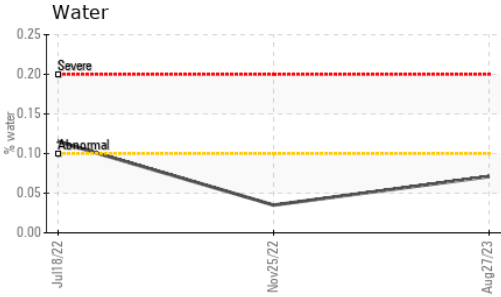





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D2729(m)	24.2	<b>24.3</b>	24.4	25.0
Visc @ 100°C	cSt	ASTM D2729(m)	4.97	<b>4.9</b>	4.9	5.2
Viscosity Index (VI)	Scale	ASTM D2270*	134	<b>127</b>	126	144

### SAMPLE IMAGES

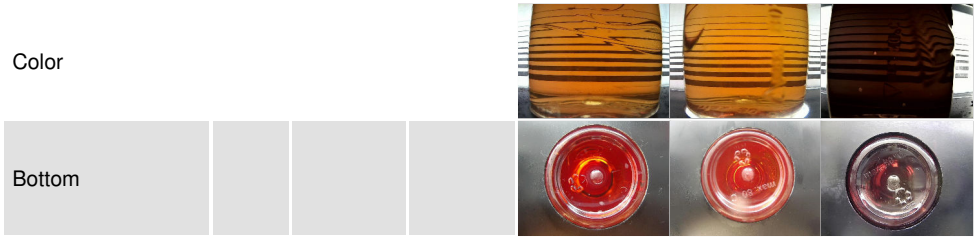

### GRAPHS

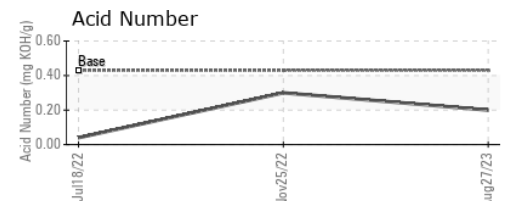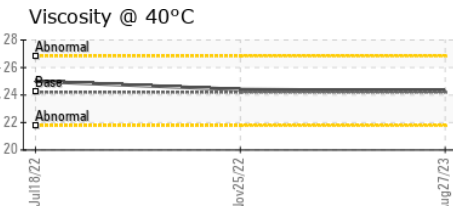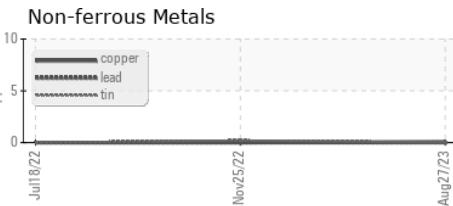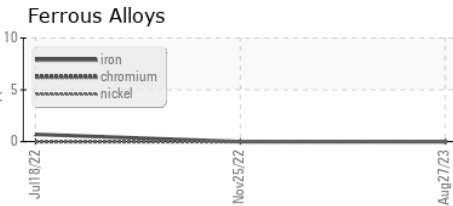

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0850516 **Received** : 05 Sep 2023  
**Lab Number** : **02580342** **Diagnosed** : 07 Sep 2023  
**Unique Number** : 5633402 **Diagnostician** : Kevin Marson  
**Test Package** : AVI 3




**Keewatin Air LP**  
 50 Morberg Way  
 Winnipeg, MB  
 CA R3H 0A4  
 Contact: Rochelle Aranez  
 raranez@keewatinair.ca  
 T: (204)888-0100  
 F: (204)888-5791

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.



# FERROGRAPHY REPORT

Area  
**(C-FSPN)**  
 Machine Id  
**[C-FSPN] SANDVIK B200 PCE-PJ1252**  
 Component  
**Left Jet Turbine**  
 Fluid  
**BP TURBO OIL 2380 (14 QTS)**

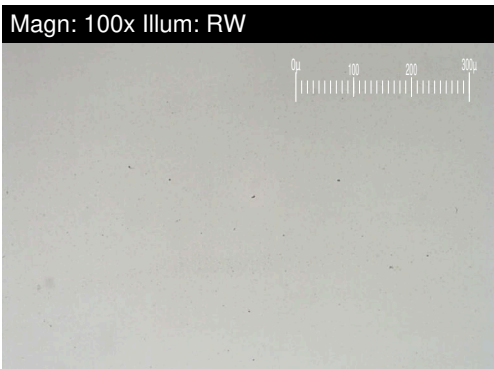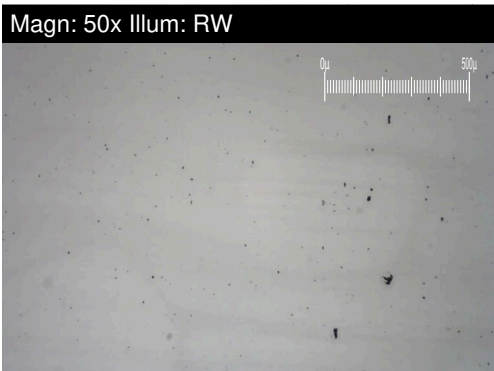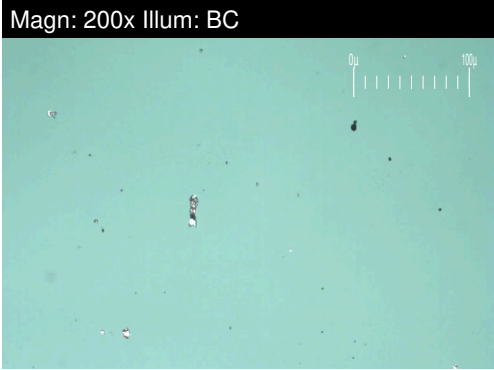


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>2.1</b>	0.4	3.9
Small Particles		DR-Ferr*		<b>1.9</b>	1.1	0.3
Total Particles		DR-Ferr*	>---	<b>4</b>	1.5	4.2
Large Particles Percentage	%	DR-Ferr*		<b>5</b>	0	85.7
Severity Index		DR-Ferr*		<b>0</b>	0	14

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<b>1</b>	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<b>1</b>		1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<b>1</b>	1	1

### WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

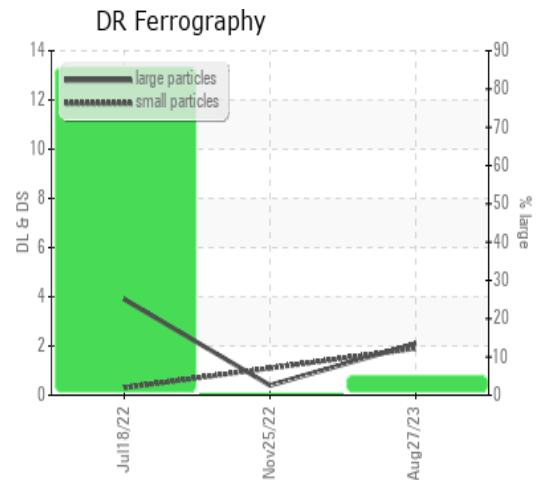

*This page left intentionally blank*