OIL ANALYSIS REPORT

Sample Rating Trend

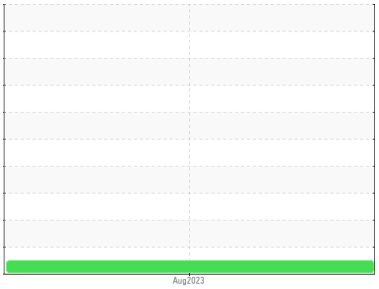

NORMAL

Area
Hendrickson Spring - H00200
Machine Id
A2308182
Component
Hydraulic System
Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation
This is a baseline read-out on the submitted sample.

Wear
{not applicable}

Contamination
{not applicable}

Fluid Condition
{not applicable}

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**E30000210**	---	---
Sample Date		Client Info		**31 Aug 2023**	---	---
Machine Age	hrs	Client Info		**0**	---	---
Oil Age	hrs	Client Info		**0**	---	---
Oil Changed		Client Info		**N/A**	---	---
Sample Status				**NORMAL**	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	**13**	---	---
Chromium	ppm	ASTM D5185(m)	>20	**<1**	---	---
Nickel	ppm	ASTM D5185(m)	>20	**<1**	---	---
Titanium	ppm	ASTM D5185(m)		**0**	---	---
Silver	ppm	ASTM D5185(m)		**0**	---	---
Aluminum	ppm	ASTM D5185(m)	>20	**<1**	---	---
Lead	ppm	ASTM D5185(m)	>20	**11**	---	---
Copper	ppm	ASTM D5185(m)	>20	**14**	---	---
Tin	ppm	ASTM D5185(m)	>20	**6**	---	---
Antimony	ppm	ASTM D5185(m)		**0**	---	---
Vanadium	ppm	ASTM D5185(m)		**0**	---	---
Beryllium	ppm	ASTM D5185(m)		**0**	---	---
Cadmium	ppm	ASTM D5185(m)		**0**	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	**1**	---	---
Barium	ppm	ASTM D5185(m)	5	**<1**	---	---
Molybdenum	ppm	ASTM D5185(m)	5	**<1**	---	---
Manganese	ppm	ASTM D5185(m)		**2**	---	---
Magnesium	ppm	ASTM D5185(m)	25	**38**	---	---
Calcium	ppm	ASTM D5185(m)	200	**79**	---	---
Phosphorus	ppm	ASTM D5185(m)	300	**458**	---	---
Zinc	ppm	ASTM D5185(m)	370	**436**	---	---
Sulfur	ppm	ASTM D5185(m)	2500	**1309**	---	---
Lithium	ppm	ASTM D5185(m)		**<1**	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	**2**	---	---
Sodium	ppm	ASTM D5185(m)		**6**	---	---
Potassium	ppm	ASTM D5185(m)	>20	**1**	---	---
Water	%	ASTM D6304*	>0.05	**0.001**	---	---
ppm Water	ppm	ASTM D6304*	>500	**3.0**	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	**543**	---	---
Particles >6µm		ASTM D7647	>1300	**172**	---	---
Particles >14µm		ASTM D7647	>160	**14**	---	---
Particles >21µm		ASTM D7647	>40	**3**	---	---
Particles >38µm		ASTM D7647	>10	**1**	---	---
Particles >71µm		ASTM D7647	>3	**0**	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	**16/15/11**	---	---

OIL ANALYSIS REPORT

Water

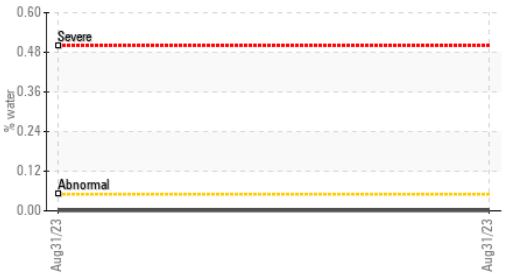

Viscosity @ 100°C

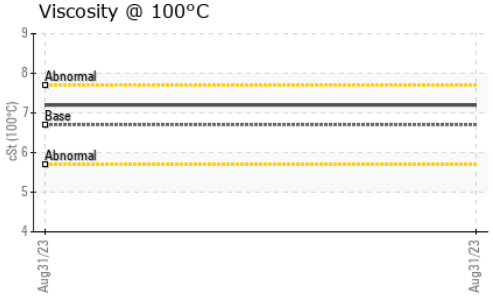

Particle Trend

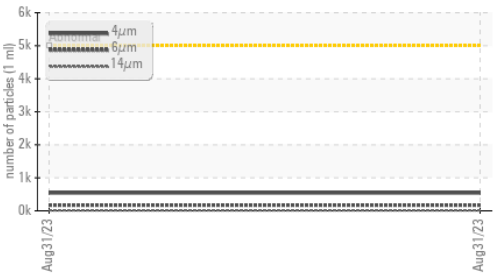

Viscosity @ 100°C

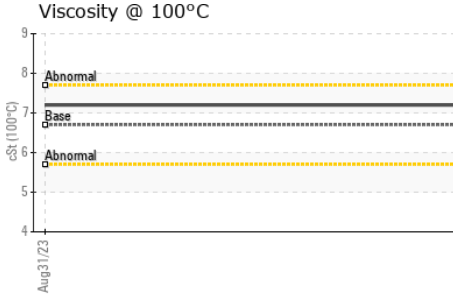

Viscosity @ 40°C

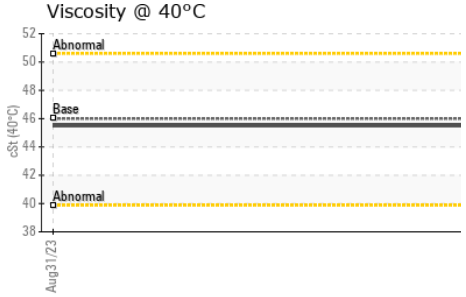

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	**0.67**	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	---	---
Yellow Metal	scalar	Visual*	NONE	**NONE**	---	---
Precipitate	scalar	Visual*	NONE	**NONE**	---	---
Silt	scalar	Visual*	NONE	**NONE**	---	---
Debris	scalar	Visual*	NONE	**NONE**	---	---
Sand/Dirt	scalar	Visual*	NONE	**NONE**	---	---
Appearance	scalar	Visual*	NORML	**NORML**	---	---
Odor	scalar	Visual*	NORML	**NORML**	---	---
Emulsified Water	scalar	Visual*	>0.05	**NEG**	---	---
Free Water	scalar	Visual*		**NEG**	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	**45.5**	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	**7.2**	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	97	**118**	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				*no image*	*no image*
Bottom				*no image*	*no image*

GRAPHS

Ferrous Alloys

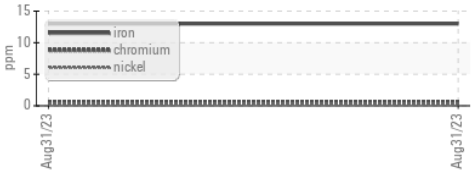

Non-ferrous Metals

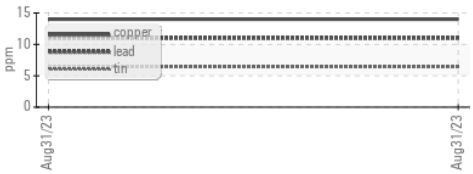

Viscosity @ 40°C

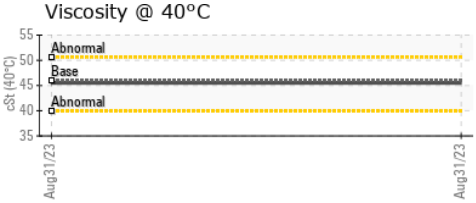

Particle Count

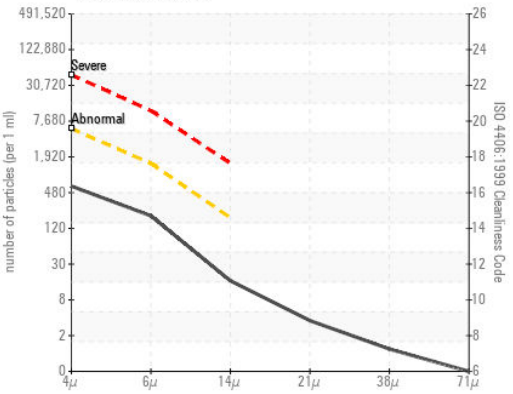

Acid Number

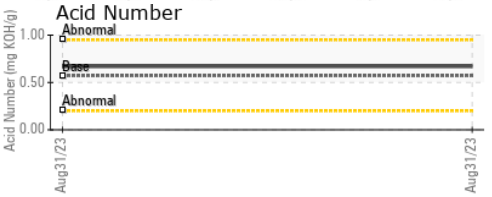

ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30000210
Lab Number : 02580374
Unique Number : 5633434
Test Package : IND 2 (Additional Tests: KF, KV100, TAN Man, VI)

Received : 05 Sep 2023
Diagnosed : 07 Sep 2023
Diagnostician : Tatiana Sorkina

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.
640 Victoria Street
Cobourg, ON
CA K9A 5H5
Contact: Tatiana Sorkina
tsorkina@e360s.ca
T: (800)263-3939
F: (905)373-4950