

OIL ANALYSIS REPORT

Sample Rating Trend



F02-BL 5120 Recycle Blower

Drive End Bearing

SWEPCO 704 HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.


Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2023	Aug2023		
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PLS0000769	WC0820466	
Sample Date		Client Info		31 Aug 2023	23 May 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	0	
Iron	ppm	ASTM D5185(m)	>20	<1	<1	
Chromium	ppm	ASTM D5185(m)	>20	0	0	
Nickel	ppm	ASTM D5185(m)	>20	<1	0	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		0	0	
Aluminum	ppm	ASTM D5185(m)	>20	0	<1	
Lead	ppm	ASTM D5185(m)	>20	0	0	
Copper	ppm	ASTM D5185(m)	>20	0	0	
Tin	ppm	ASTM D5185(m)	>20	0	0	
Antimony	ppm	ASTM D5185(m)		0	<1	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1	0	
Barium	ppm	ASTM D5185(m)		0	0	
Molybdenum	ppm	ASTM D5185(m)		1	1	
Manganese	ppm	ASTM D5185(m)		0	0	
Magnesium	ppm	ASTM D5185(m)		98	99	
Calcium	ppm	ASTM D5185(m)		71	75	
Phosphorus	ppm	ASTM D5185(m)		328	335	
Zinc	ppm	ASTM D5185(m)		368	378	
Sulfur	ppm	ASTM D5185(m)		731	767	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<1	0	
Sodium	ppm	ASTM D5185(m)		1	<1	
Potassium	ppm	ASTM D5185(m)	>20	<1	0	
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	8034	3354	
Particles >6µm		ASTM D7647	>2500	2160	626	
Particles >14µm		ASTM D7647	>160	169	44	
Particles >21µm		ASTM D7647	>40	54	14	
Particles >38µm		ASTM D7647	>10	5	2	
Particles >71µm		ASTM D7647	>3	1	1	
Oil Cleanliness		ISO 4406 (c)	>20/18/14	20/18/15	19/16/13	





0

55

Viscosity @ 40°C

OIL ANALYSIS REPORT

VISUAL

Color

mg KOH/g

scalar

scalar

scalar

ASTM D974*

Visual*

Visual*

Visual*

NONE

NONE


NONE


0.35

NONE

NONE

NONE

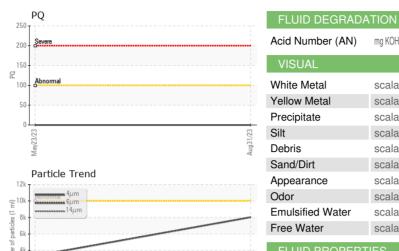

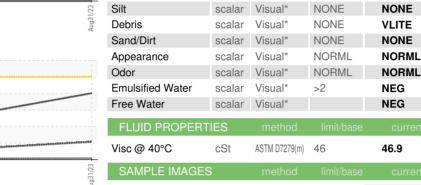



0.56

NONE

NONE

NONE

NONE

NONE


NONE

NORML

NORML

NEG

NEG

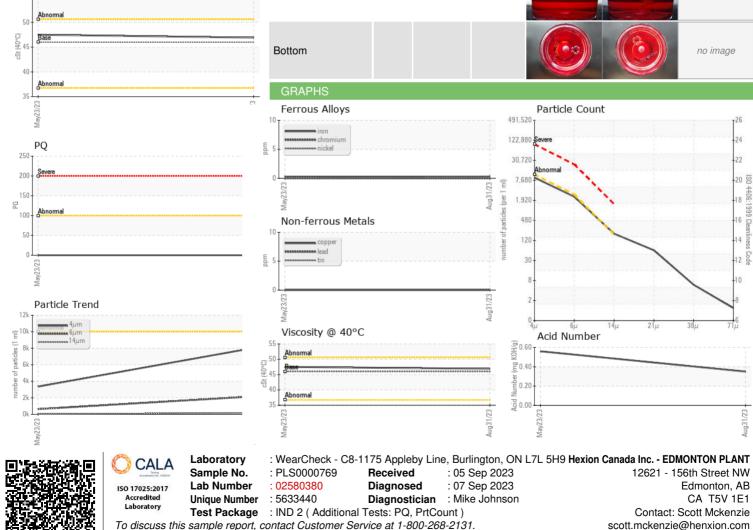

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

T: (780)447-8469

F: (780)447-7268