



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**466**  
 Component  
**Right Final Drive**  
 Fluid  
**CASTROL TRANSYND (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC876714</b>	---	---
Sample Date	Client Info		<b>04 Sep 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>619</b>	---	---
Oil Changed		Client Info	<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>500	<b>39</b>	---
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>5</b>	---
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	---
Copper	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	147	<b>133</b>	---
Barium	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	---
Molybdenum	ppm	ASTM D5185(m)	0.1	<b>8</b>	---
Manganese	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	---
Magnesium	ppm	ASTM D5185(m)	1.0	<b>1</b>	---
Calcium	ppm	ASTM D5185(m)	37	<b>38</b>	---
Phosphorus	ppm	ASTM D5185(m)	318	<b>293</b>	---
Zinc	ppm	ASTM D5185(m)	6.1	<b>18</b>	---
Sulfur	ppm	ASTM D5185(m)	1058	<b>353</b>	---
Lithium	ppm	ASTM D5185(m)		<b>7</b>	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	<b>21</b>	---
Sodium	ppm	ASTM D5185(m)		<b>4</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---
Free Water	scalar	Visual*		<b>NEG</b>	---











# OIL ANALYSIS REPORT

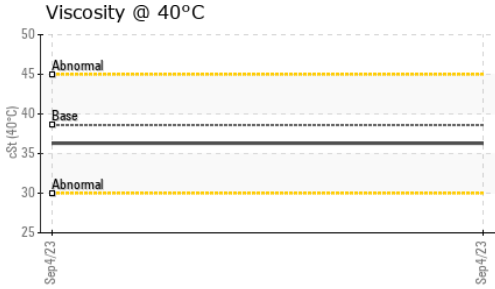

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	36.6	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

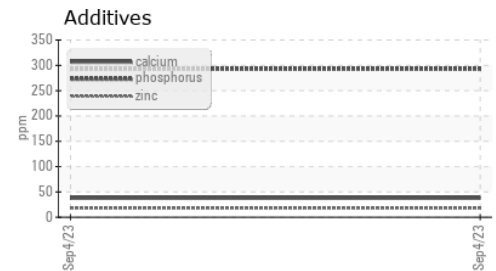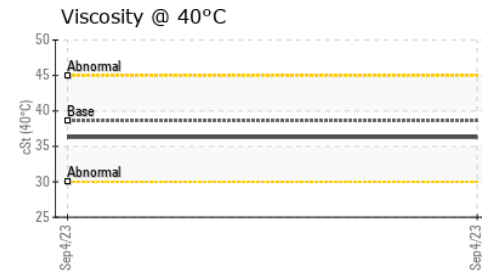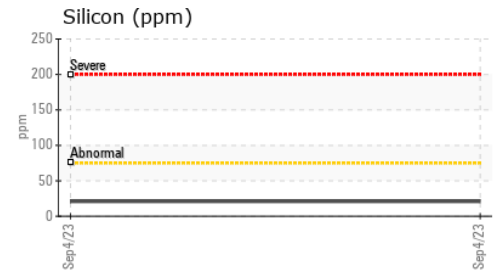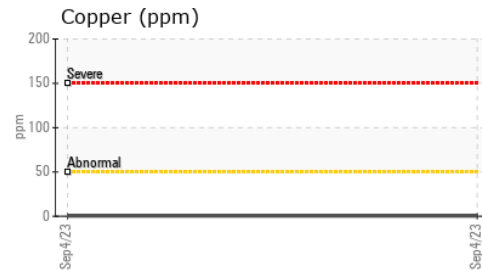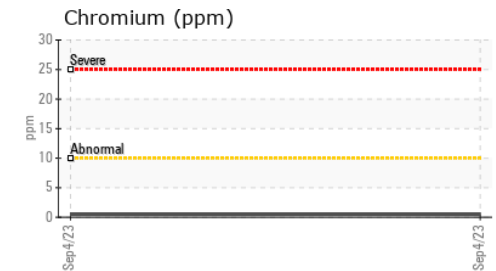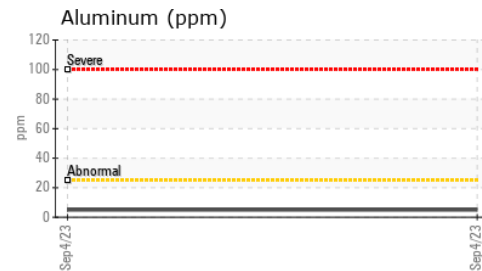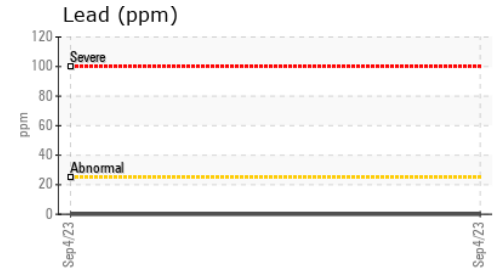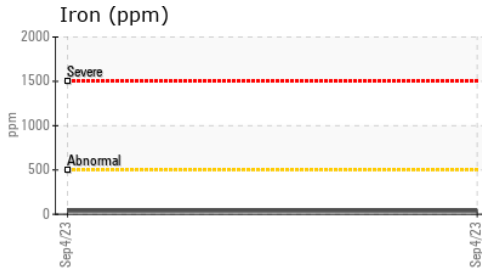

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **DEPARTMENT OF NATIONAL DEFENSE**  
**Sample No.** : WC876714 **Received** : 05 Sep 2023 **MGEN.GEORGE R.PEARKE'S BUILDING**  
**Lab Number** : 02580450 **Diagnosed** : 05 Sep 2023 **OTTAWA, ON**  
**Unique Number** : 5633510 **Diagnostician** : Kevin Marson **CA K1A 0K2**  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Philippe Charron  
 philippe.charron@forces.gc.ca  
 T: (514)252-2777  
 F: (819)997-9989