



# FUEL REPORT

Sample Rating Trend



ISO



Area  
**VANTAGE [327313]**

Machine Id  
**F1**

Component  
**Diesel Fuel**

Fluid  
**No.1 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)**

## DIAGNOSIS

### Recommendation

Les tests de laboratoire indiquent que ce carburant peut être utilisé et qu'il répond à toutes les exigences. Nous vous recommandons de filtrer ce fluide avant de l'utiliser. Nous recommandons le remplacement des filtres de ce composant. Nous vous recommandons d'échantillonner de nouveau dès que possible afin de contrôler la situation.

### Corrosion

(sans objet)

### Contaminants

Il y a une quantité modérée de particules (de 4 à 14 microns) dans le carburant. La teneur en eau est négligeable.

### Fuel Condition

Tous les essais en laboratoire indiquent que cet échantillon satisfait aux spécifications pour le carburant diesel à ultra-faible teneur de soufre No.1 (US EPA/CGSB-3.517-3 type A). le carburant peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>CU0021589</b>	---	---
Sample Date	Client Info			<b>31 Aug 2023</b>	---	---
Machine Age	hrs	Client Info		<b>183</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*	0.825	<b>0.817</b>	---	---
Fuel Color	text	Visual Screen*	Clear	<b>Pink</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	1.8	<b>1.7</b>	---	---
Pensky-Martens Flash Point	°C	ASTM D7215*	38	<b>53.8</b>	---	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	10	<b>11</b>	---	---

DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	159	<b>162</b>	---	---
5% Distillation Point	°C	ASTM D2887*		<b>180</b>	---	---
10% Distill Point	°C	ASTM D2887*	184	<b>186</b>	---	---
15% Distillation Point	°C	ASTM D2887*		<b>192</b>	---	---
20% Distill Point	°C	ASTM D2887*	196	<b>197</b>	---	---
30% Distill Point	°C	ASTM D2887*	205	<b>207</b>	---	---
40% Distill Point	°C	ASTM D2887*	216	<b>216</b>	---	---
50% Distill Point	°C	ASTM D2887*	227	<b>226</b>	---	---
60% Distill Point	°C	ASTM D2887*	238	<b>236</b>	---	---
70% Distill Point	°C	ASTM D2887*	251	<b>246</b>	---	---
80% Distill Point	°C	ASTM D2887*	264	<b>260</b>	---	---
85% Distillation Point	°C	ASTM D2887*		<b>271</b>	---	---
90% Distill Point	°C	ASTM D2887*	288	<b>282</b>	---	---
95% Distillation Point	°C	ASTM D2887*		<b>300</b>	---	---
Final Boiling Point	°C	ASTM D2887*	309	<b>323</b>	---	---






IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	40.1	<b>41</b>	---	---
Cetane Index		ASTM D4737*	<40.0	<b>48</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	<b>0</b>	---	---
Sodium	ppm	ASTM D5185(m)	<0.1	<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m)	<0.1	<b>&lt;1</b>	---	---
Water	%	ASTM D6304*	<0.05	<b>0.003</b>	---	---
ppm Water	ppm	ASTM D6304*	<500	<b>32.8</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	<b>▲ 3691</b>	---	---
Particles >6µm		ASTM D7647	>640	<b>▲ 1585</b>	---	---
Particles >14µm		ASTM D7647	>80	<b>▲ 82</b>	---	---
Particles >21µm		ASTM D7647	>20	<b>14</b>	---	---
Particles >38µm		ASTM D7647	>4	<b>0</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	<b>▲ 19/18/14</b>	---	---






# FUEL REPORT

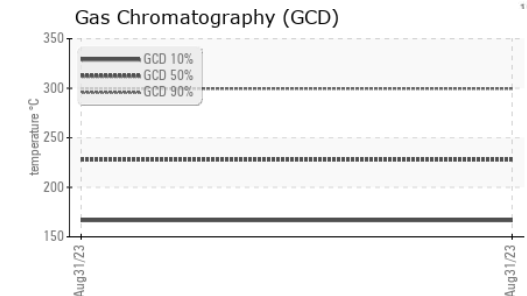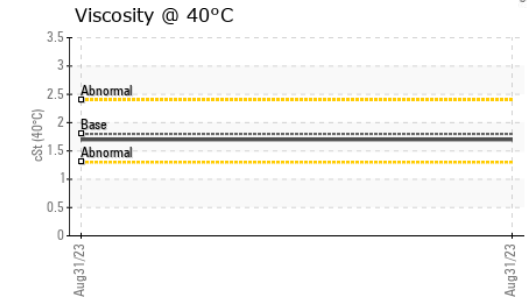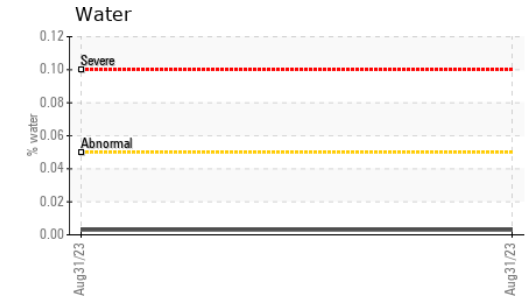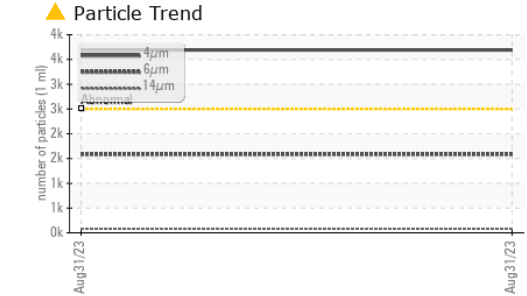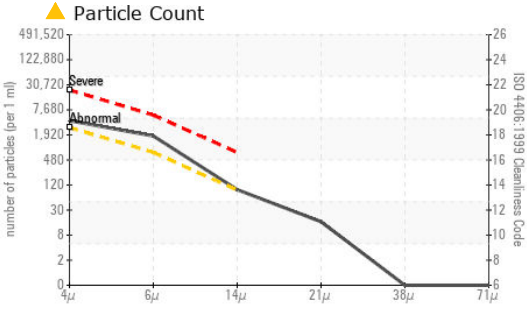

HEAVY METALS	method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---
Lead	ppm	ASTM D5185(m)	<0.1	<1	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---
Iron	ppm	ASTM D5185(m)	<0.1	<1	---
Calcium	ppm	ASTM D5185(m)	<0.1	<1	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	<1	---
Zinc	ppm	ASTM D5185(m)	<0.1	3	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

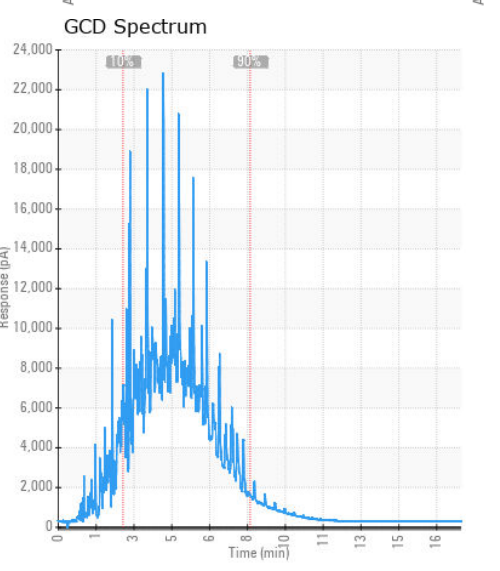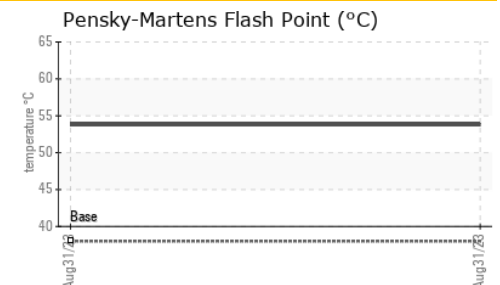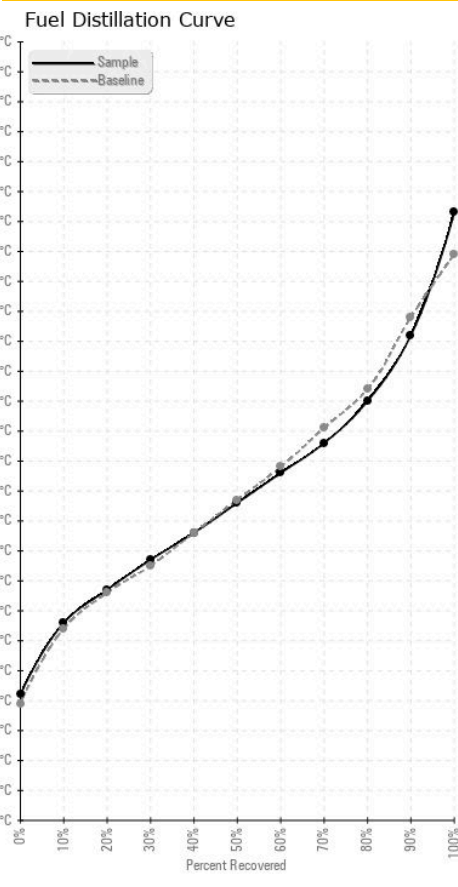

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CU0021589      **Received** : 05 Sep 2023  
**Lab Number** : 02580535      **Diagnosed** : 07 Sep 2023  
**Unique Number** : 5633595      **Diagnostician** : Kevin Marson  
**Test Package** : FUEL ( Additional Tests: CC Flash, GC-PercFuel, PrtCount )

**CUMMINS EASTERN CANADA LP**  
 315 AV LIBERTE  
 CANDIAC, QC  
 CA J5R 6Z7  
 Contact: Thomas Owens  
 is275@cummins.com  
 T: (450)638-6863  
 F: (450)638-1202

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.