



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL




Area
[41221271]

Machine Id
9686

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

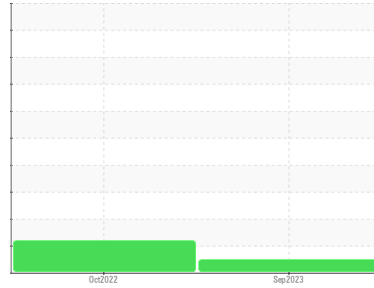

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0853422	WC0737958	---
Sample Date	Client Info			02 Sep 2023	29 Oct 2022	---
Machine Age	kms	Client Info		67657	23229	---
Oil Age	kms	Client Info		0	0	---
Oil Changed	Client Info			Not Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	▲ 2.8	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	21	65	---
Chromium	ppm	ASTM D5185(m)	>20	<1	1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>2	<1	<1	---
Silver	ppm	ASTM D5185(m)	>2	0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	12	13	---
Lead	ppm	ASTM D5185(m)	>40	0	<1	---
Copper	ppm	ASTM D5185(m)	>330	1	17	---
Tin	ppm	ASTM D5185(m)	>15	0	1	---
Antimony	ppm	ASTM D5185(m)		0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	37	21	---
Barium	ppm	ASTM D5185(m)	10	0	5	---
Molybdenum	ppm	ASTM D5185(m)	100	2	49	---
Manganese	ppm	ASTM D5185(m)		<1	6	---
Magnesium	ppm	ASTM D5185(m)	450	711	773	---
Calcium	ppm	ASTM D5185(m)	3000	1284	1225	---
Phosphorus	ppm	ASTM D5185(m)	1150	703	701	---
Zinc	ppm	ASTM D5185(m)	1350	740	805	---
Sulfur	ppm	ASTM D5185(m)	4250	2422	1898	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	15	---
Sodium	ppm	ASTM D5185(m)		3	6	---
Potassium	ppm	ASTM D5185(m)	>20	29	37	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.5	0.5	---
Nitration	Abs/cm	ASTM D7624*	>20	11.2	13.5	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.4	26.9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.6	28.8	---











OIL ANALYSIS REPORT

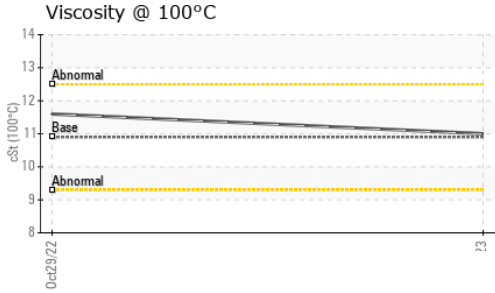

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.0	▲ 11.6

GRAPHS

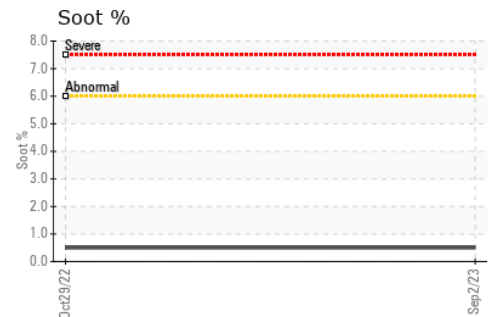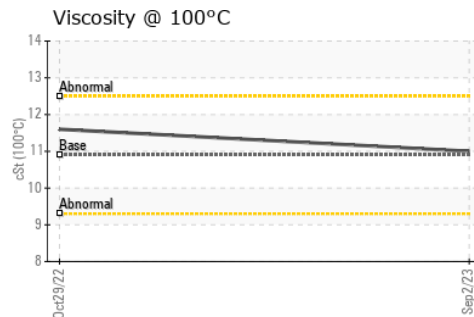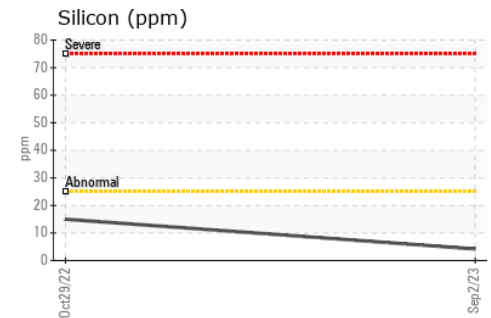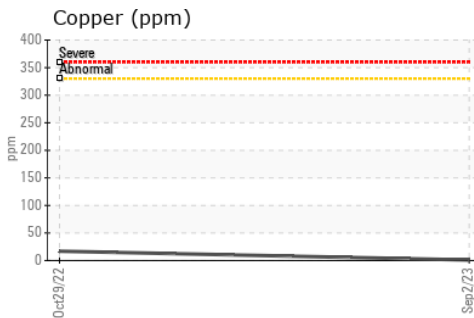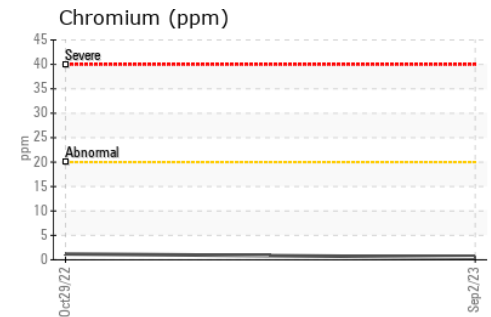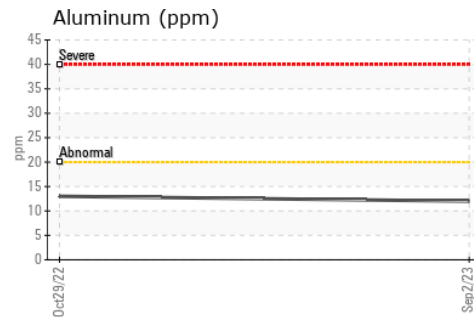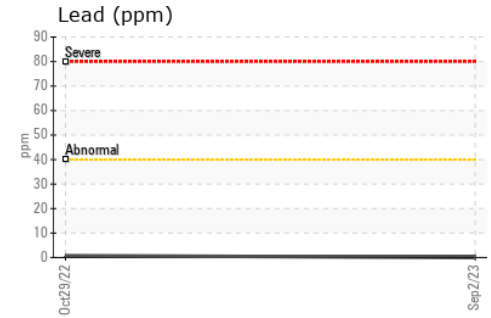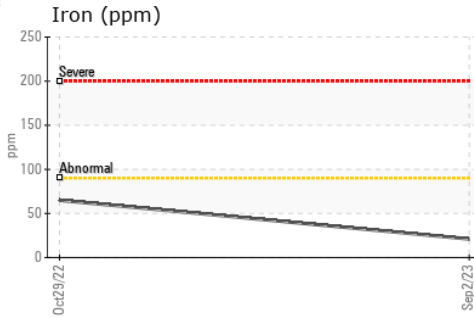

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0853422 **Received** : 06 Sep 2023
Lab Number : 02580599 **Diagnosed** : 06 Sep 2023
Unique Number : 5633659 **Diagnostician** : Kevin Marson
Test Package : MOB 1

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.