




OIL ANALYSIS REPORT

Sample Rating Trend

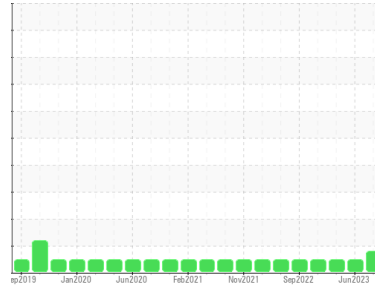

WEAR



Machine Id
NEW FLYER 1830
 Component
Natural Gas Engine
 Fluid
VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

Lead ppm levels are marginal. A sharp increase in the lead level is noted.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0849787	WC0811415	WC0791397
Sample Date	Client Info		31 Aug 2023	15 Jun 2023	04 Apr 2023
Machine Age	kms	Client Info	315505	294009	219300
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			MARGINAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		---	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >50	17	18	13
Chromium	ppm	ASTM D5185(m) >4	<1	<1	0
Nickel	ppm	ASTM D5185(m) >2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	<1	<1	<1
Silver	ppm	ASTM D5185(m) >3	0	0	0
Aluminum	ppm	ASTM D5185(m) >9	2	2	1
Lead	ppm	ASTM D5185(m) >30	▲ 22	2	<1
Copper	ppm	ASTM D5185(m) >35	1	1	2
Tin	ppm	ASTM D5185(m) >4	3	1	<1
Antimony	ppm	ASTM D5185(m)	0	<1	0
Vanadium	ppm	ASTM D5185(m)	0	0	0
Beryllium	ppm	ASTM D5185(m)	0	0	0
Cadmium	ppm	ASTM D5185(m)	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	4	6	27
Barium	ppm	ASTM D5185(m)	0	0	2
Molybdenum	ppm	ASTM D5185(m)	56	53	47
Manganese	ppm	ASTM D5185(m)	<1	1	3
Magnesium	ppm	ASTM D5185(m)	880	818	773
Calcium	ppm	ASTM D5185(m)	1277	1263	1237
Phosphorus	ppm	ASTM D5185(m)	750	696	757
Zinc	ppm	ASTM D5185(m)	900	825	789
Sulfur	ppm	ASTM D5185(m)	1910	1923	1983
Lithium	ppm	ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >+100	10	15	25
Sodium	ppm	ASTM D5185(m)	6	3	4
Potassium	ppm	ASTM D5185(m) >20	<1	<1	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	0	0	0
Nitration	Abs/cm	ASTM D7624* >20	13.0	12.7	8.8
Sulfation	Abs/.1mm	ASTM D7415* >30	28.0	25.7	23.4


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	25.3	23.1	18.1



OIL ANALYSIS REPORT

▲ Non-ferrous Metals

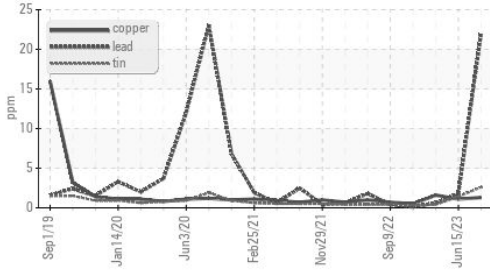


VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.6	14.2

GRAPHS


Viscosity @ 100°C

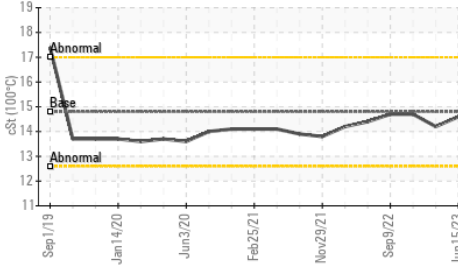


Iron (ppm)

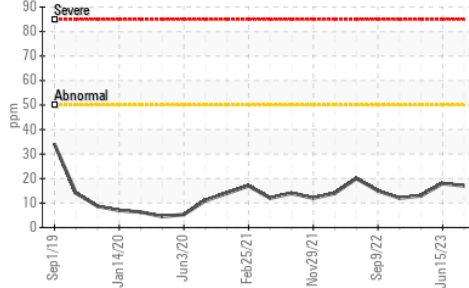


▲ Lead (ppm)

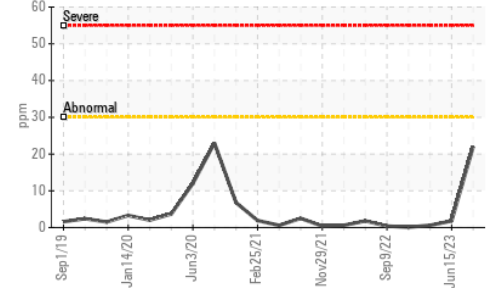


Aluminum (ppm)

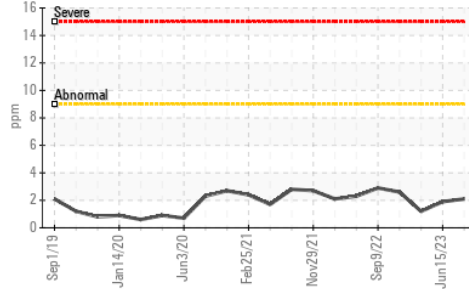


Chromium (ppm)

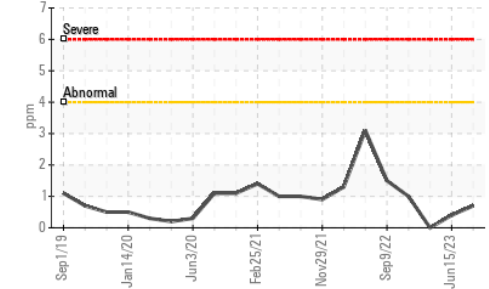


Copper (ppm)

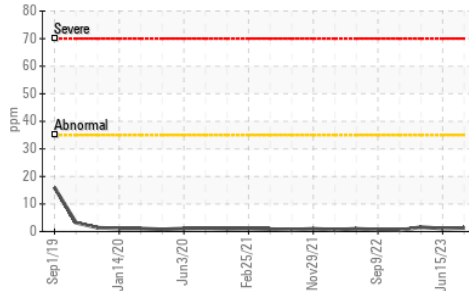


Silicon (ppm)

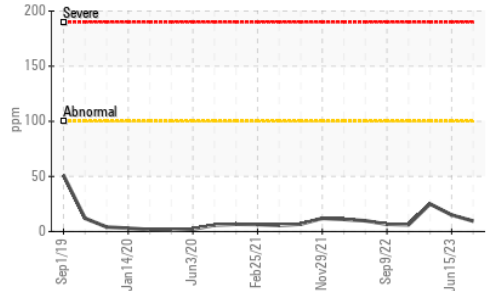

Viscosity @ 100°C

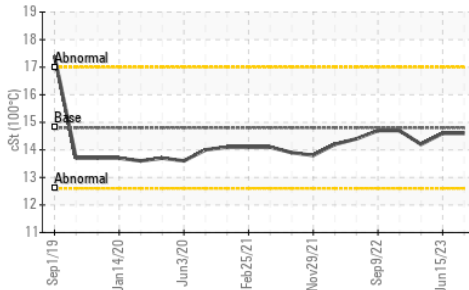

Additives

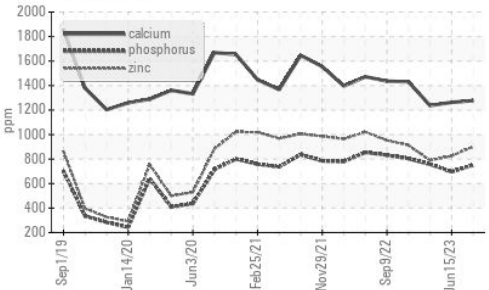

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0849787
Lab Number : 02580664
Unique Number : 5633724
Test Package : MOB 1

Received : 06 Sep 2023
Diagnosed : 07 Sep 2023
Diagnostician : Kevin Marson

CITY OF HAMILTON
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM
 MOUNT HOPE, ON
 CA L0R 1W0
 Contact: Jeff Parr
 jeff.parr@hamilton.ca
 T: (905)546-2424
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.