




OIL ANALYSIS REPORT

Sample Rating Trend

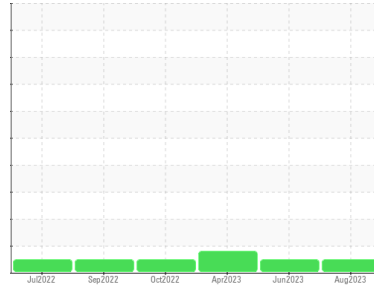

NORMAL



Machine Id
[C-GGPC] TRAVELLER AA-5 C-GGPC (S/N L-42057-27A)

Component
Front Piston Aircraft Engine

Fluid
PHILLIPS 66 AVIATION X/C OIL SAE20W50 (7 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0855030	WC0811905	WC0811904
Sample Date	Client Info		30 Aug 2023	04 Jun 2023	15 Apr 2023
TSN	hrs	Client Info	2560	2510	2459
TSO	hrs	Client Info	2091	2041	1990
Oil Age	hrs	Client Info	50	54	58
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	34	37	42
Chromium	ppm	ASTM D5185(m)	>20	3	4	5
Nickel	ppm	ASTM D5185(m)	>15	8	11	▲ 17
Titanium	ppm	ASTM D5185(m)		<1	<1	<1
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	7	8	10
Lead	ppm	ASTM D5185(m)	>20000	5635	5414	5836
Copper	ppm	ASTM D5185(m)	>25	3	3	4
Tin	ppm	ASTM D5185(m)	>30	0	0	0
Antimony	ppm	ASTM D5185(m)		0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		<1	<1	<1

ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<1	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		2	2	3
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	0	2
Calcium	ppm	ASTM D5185(m)		1	0	1
Phosphorus	ppm	ASTM D5185(m)		2	2	2
Zinc	ppm	ASTM D5185(m)		3	2	3
Sulfur	ppm	ASTM D5185(m)		1111	1098	1106
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	4	5	5
Sodium	ppm	ASTM D5185(m)		<1	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1






OIL ANALYSIS REPORT

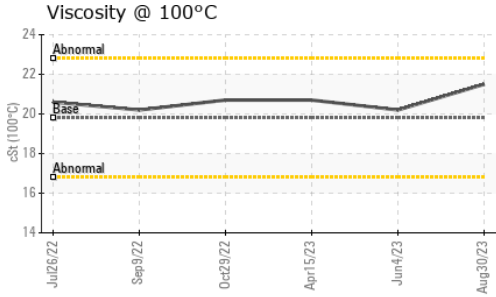

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	19.8	21.5	20.2	20.7

GRAPHS

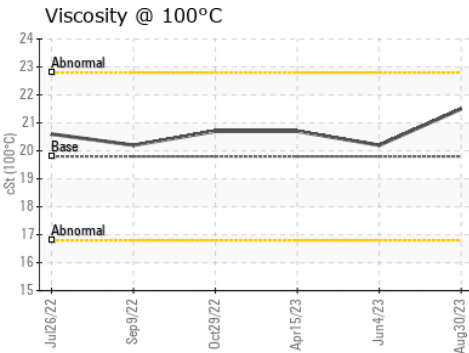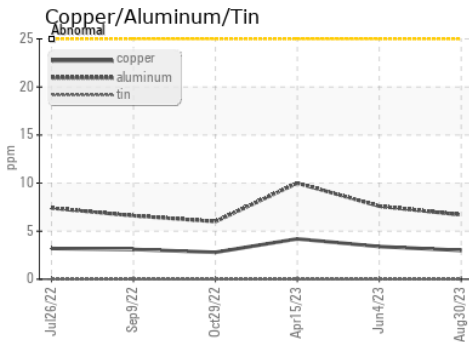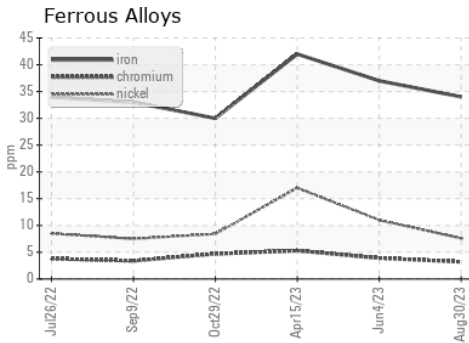

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0855030
Lab Number : **02580670**
Unique Number : 5633730
Test Package : AVI 1

SHANE HUNT
 1264 ALDRIDGE CRES
 BURLINGTON, ON
 CA L7M 1H9
 Contact: Shane Hunt
 shane.hunt51@gmail.com
 T: (647)217-3817
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.