

Chem-Ecol

A2308181

Component

## **OIL ANALYSIS REPORT**

Sample Rating Trend







**Cutting Fluid** CHEM-ECOL CUTTING OIL 1000H (--- GAL)


## SAMPLE INFORMATION method limit/base Sample Recommendation This is a baseline read-out on the submitted Sample sample. Machir Wear Oil Age {not applicable} Oil Cha Sample Contamination {not applicable} Fluid Condition Iron {not applicable} Chrom Nickel Titaniu Silver Alumin Lead Coppe Tin Antimo Vanadi Berylliu Cadmi Boron Barium Molybd Manga Magne Calciur

Sample Number		Client Info		E30000234		
Sample Date		Client Info		30 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		15		
Chromium	ppm	ASTM D5185(m)		<1		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		<1		
Copper	ppm	ASTM D5185(m)		9		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		2		
Molybdenum	ppm	ASTM D5185(m)		<1		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)		99		
Calcium	ppm	ASTM D5185(m)		108		
Phosphorus	ppm	ASTM D5185(m)		519		
Zinc	ppm	ASTM D5185(m)		584		
Sulfur	ppm	ASTM D5185(m)		2840		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		4		
Sodium	ppm	ASTM D5185(m)		3		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.011		
ppm Water	ppm	ASTM D6304*		116.3		
FLUID CLEANLIN	IESS_	method	limit/base	current	historv1	historv2

FLUID CLEANLINESS	method			history2
Particles >4µm	ASTM D7647	>5000	807	 
Particles >6µm	ASTM D7647	>1300	120	 
Particles >14µm	ASTM D7647	>160	6	 
Particles >21µm	ASTM D7647	>40	2	 
Particles >38µm	ASTM D7647	>10	0	 
Particles >71µm	ASTM D7647	>3	0	 
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/14/10	 



## **OIL ANALYSIS REPORT**

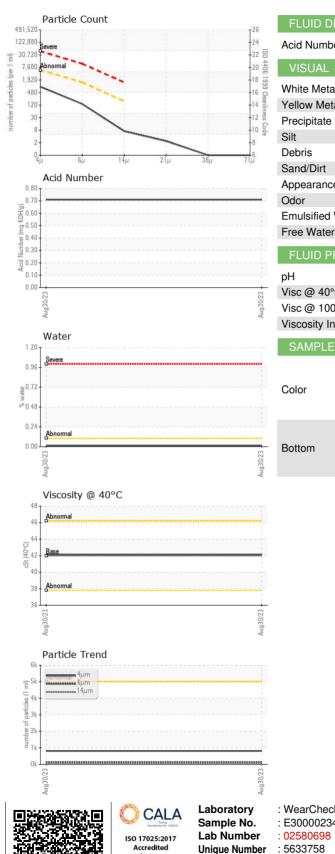

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.71		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
рН	Scale 0-14	ASTM D1287*		7.62		
Visc @ 40°C	cSt	ASTM D7279(m)	42	42.1		
Visc @ 100°C	cSt	ASTM D7279(m)		6.9		
Viscosity Index (VI)	Scale	ASTM D2270*		121		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image
					no image	no image

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Environmental 360 Solutions Ltd. : E30000234 Received : 06 Sep 2023 640 Victoria Street Diagnosed : 07 Sep 2023 Cobourg, ON Accredited Laboratory Unique Number : 5633758 Diagnostician : Tatiana Sorkina CA K9A 5H5 Test Package : IND 2 (Additional Tests: KV100, PrtCount, VI) Contact: Tatiana Sorkina To discuss this sample report, contact Customer Service at 1-800-268-2131. tsorkina@e360s.ca T: (800)263-3939 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied. F: (905)373-4950