

OIL ANALYSIS REPORT

Goodyear - G04000 A2309027

Component

Hydraulic System

AW HYDRAULIC OIL ISO 68 (--- GAL)

Sample Rating Trend NORMAL

Recommendation

This is a baseline read-out on the submitted sample.

Wear

Copper and iron ppm levels are noted.

Contamination

{not applicable}

Fluid Condition


{not applicable}

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		E30000260		
Sample Date		Client Info		01 Sep 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>20	40		
Chromium	ppm	ASTM D5185(m)	>20	<1		
Nickel	ppm	ASTM D5185(m)	>20	2		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>20	7		
Lead	ppm	ASTM D5185(m)	>20	17		
Copper	ppm	ASTM D5185(m)	>20	131		
Tin	ppm	ASTM D5185(m)	>20	<1		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		<1		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		<1		
ADDITIVES	1-1-	method	limit/base	current	history1	history2
Boron	nnm	ASTM D5185(m)	5	<1		
Barium	ppm	ASTM D5185(III)	5	<1		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese		ASTM D5105(III) ASTM D5185(m)	3	1		
Magnesium	ppm	ASTM D5185(m)	25	8		
Calcium	ppm	ASTM D5185(III) ASTM D5185(m)	200	45		
Phosphorus		ASTM D5185(m)	300	681		
Zinc	ppm	ASTM D5185(III) ASTM D5185(m)	370	495		
Sulfur	ppm	ASTM D5185(III) ASTM D5185(m)	2500	2372		
Lithium	ppm	ASTM D5185(III) ASTM D5185(m)	2500	<1		
	ppm					
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	14		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*	>0.05	0.001		
ppm Water	ppm	ASTM D6304*	>500	6.4		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	278		
Particles >6µm		ASTM D7647	>1300	57		
Particles >14μm		ASTM D7647	>160	6		
Particles >21μm		ASTM D7647	>40	2		
Particles >38μm		ASTM D7647	>10	1		
Particles >71μm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	15/13/10 Contact/Locat	 ion: Tatiana Sor	kina - CHECOR

Contact/Location: Tatiana Sorkina - CHECOB



OIL ANALYSIS REPORT

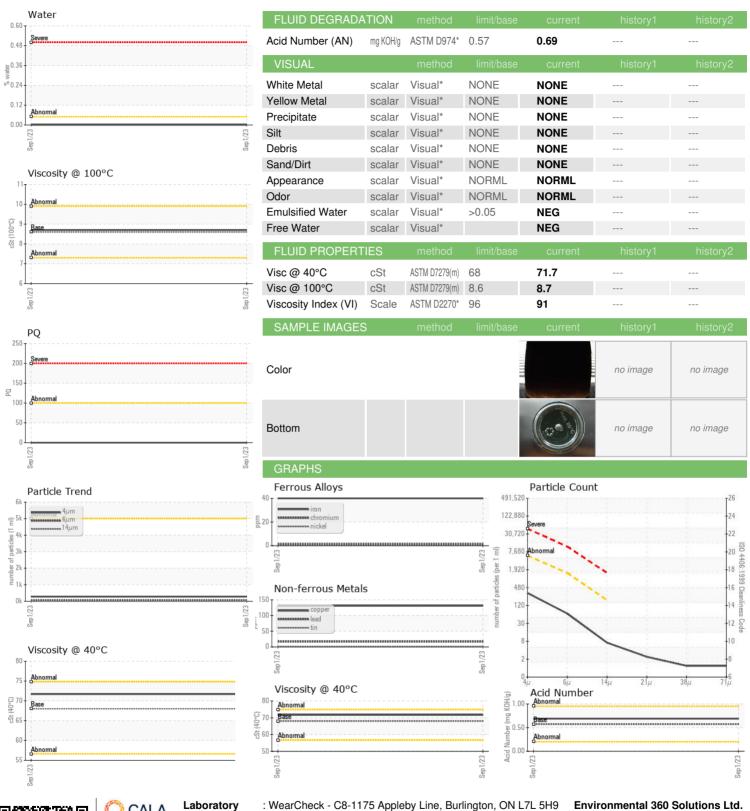



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: E30000260

: 5633760

Received : 02580700

Diagnosed

: 06 Sep 2023 : 07 Sep 2023

Diagnostician : Tatiana Sorkina

Test Package : IND 2 (Additional Tests: KF, KV100, PQ, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd. 640 Victoria Street

Cobourg, ON **CA K9A 5H5** Contact: Tatiana Sorkina tsorkina@e360s.ca

T: (800)263-3939 F: (905)373-4950