

# **FUEL REPORT**

# [N111NH] EMBRAER EMB190 N111NH

Left Jet Fuel

JET FUEL Type A (--- GAL)

# Sample Rating Trend



### DIAGNOSIS

### Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

{not applicable}

### Contamination

There is no bacteria or fungus (yeast and/or mold) present in the sample. The water content is negligible. The fuel phase was tested for microbes, as there was no separate water phase present in the sample. The MicrobMonitor2 test kit was used to test for microbiological contamination in the sample. There is no indication of any contamination in the jet fuel.


### **Fluid Condition**

All laboratory tests indicate that this sample appears to be Jet Fuel Type A.

				Aug2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC961527		
Sample Date		Client Info		25 Aug 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed	0	Client Info		Not Changd		
Sample Status		Oliciti IIIIo		NORMAL		
PHYSICAL PROP	FRTIES	method	limit/base	current	history1	history2
	LITTILO	ASTM D1298*	IIIIIIIIII			,
Specific Gravity	4 4	7.0 1 2 . 200		0.800		
Fuel Color	text	Visual Screen*		Clear		
Visc @ 40°C	cSt	ASTM D7279(m)	<8.0	1.4		
Pensky-Martens Flash Point		ASTM D7215*	38	47.7		
Pour Point	°C	ASTM D97*	-45	-54		
SULFUR CONTE	VT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	<3000	1087		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*		155		
5% Distillation Point	°C	ASTM D2887*		173		
10% Distill Point	°C	ASTM D2887*	205	178		
15% Distillation Point		ASTM D2887*		183		
20% Distill Point	°C	ASTM D2887*		188		
30% Distill Point	°C	ASTM D2887*		195		
40% Distill Point	°C	ASTM D2887*		203		
50% Distill Point	°C	ASTM D2887*		211		
60% Distill Point	°C	ASTM D2887*				
				218		
70% Distill Point	°C	ASTM D2887*		225		
80% Distill Point	°C	ASTM D2887*		234		
85% Distillation Point		ASTM D2887*		242		
90% Distill Point	°C	ASTM D2887*		249		
95% Distillation Point	°C	ASTM D2887*		262		
Final Boiling Point	°C	ASTM D2887*	300	294		
IGNITION QUALIT	ГҮ	method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	44	45		
Cetane Index		ASTM D4737*	<40.0	50		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	0		
Sodium	ppm	ASTM D5185(m)	< 0.1	0		
Potassium	ppm	ASTM D5185(m)	<0.1	<1		
Water	%	ASTM D6304*	< 0.05	0.003		
ppm Water	ppm	ASTM D6304*	<500	35.8		
MICROBIAL		method	limit/base	current	history1	history2
Microbes	CFU/L	ASTM D6469*	>=100000	0		



## **FUEL REPORT**

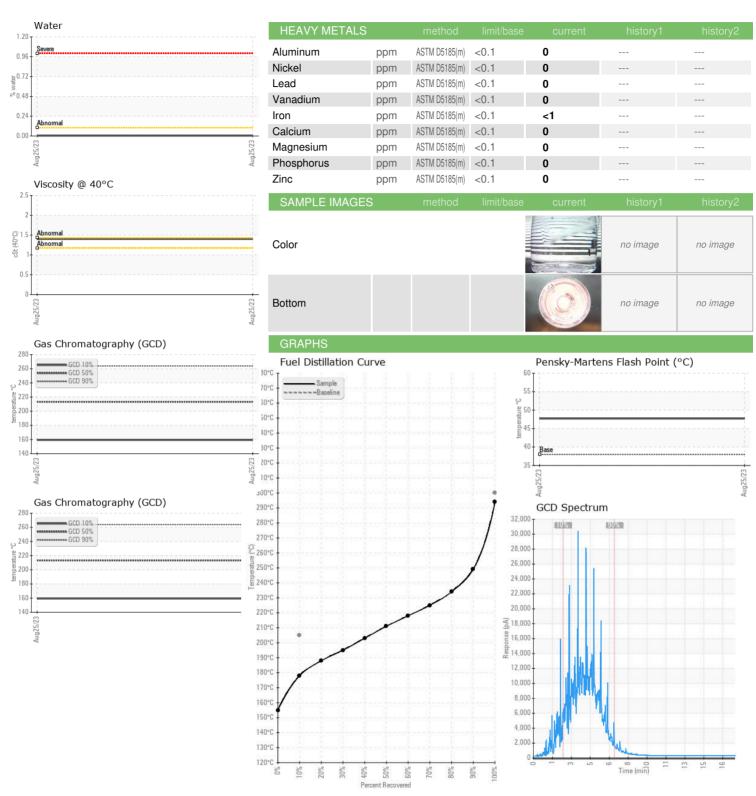



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number** 

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC961527

To discuss this sample report, contact Customer Service at 1-800-268-2131.

: 02580803 : 5633863

Received Diagnosed

: 06 Sep 2023 : 11 Sep 2023

Diagnostician : Kevin Marson Test Package: FUEL (Additional Tests: CC Flash, GC-PercFuel)

Hangar #2, 403 Canada Ave., P.O. Box 556 Huron Park, ON CA NOM 1Y0 Contact: Peter Bell

Contact/Location: Peter Bell - GODHUR

pbell@newunitedgoderich.com T: (519)228-6868

**New United Goderich** 

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied. F: (519)228-6969