

PROBLEM SUMMARY

Sample Rating Trend

VISCOSITY




1570B DRAG #1


Component


1 Gearbox

BELRAY 100 EP GEAR OIL 680 (70 GAL)

COMPONENT CONDITION SUMMARY







RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	
Visc @ 40°C	cSt	ASTM D7279(m)	688	△ 502	

Customer Id: CANESTSK Sample No.: BR0000787 Lab Number: 02585964 Test Package: IND 1



To manage this report scan the QR code

To discuss the diagnosis or test data: Kevin Marson +1 (289)291-4644 x4644 Kevin.Marson@wearcheck.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Check Fluid Source			?	Confirm the source of the lubricant being utilized for top-up/fill.			

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

1570B DRAG #1

Component

1 Gearbox

BELRAY 100 EP GEAR OIL 680 (70 GAL)

DIAGNOSIS

Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition

Viscosity of sample indicates oil is within ISO 460 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the oil is acceptable for the time in service.

				Sep2023		
SAMPLE INFORM	1ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		BR0000787		
Sample Date		Client Info		20 Sep 2023		
Machine Age	hrs	Client Info		0 Sep 2023		
Oil Age	hrs	Client Info		0		
Oil Changed	1115	Client Info		N/A		
Sample Status		Ciletit iiiio		ABNORMAL		
Sample Status				ADITOTIMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	34		
Chromium	ppm	ASTM D5185(m)	>15	0		
Nickel	ppm	ASTM D5185(m)	>15	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>25	116		
Lead	ppm	ASTM D5185(m)	>100	2		
Copper	ppm	ASTM D5185(m)	>200	15		
Tin	ppm	ASTM D5185(m)	>25	0		
Antimony	ppm	ASTM D5185(m)	>5	1443		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		60		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		<1		
•	PP					
Calcium	ppm	ASTM D5185(m)		4		
Calcium Phosphorus		ASTM D5185(m) ASTM D5185(m)		4 235		
	ppm	. ,		-		
Phosphorus	ppm ppm	ASTM D5185(m)		235		
Phosphorus Zinc	ppm ppm	ASTM D5185(m) ASTM D5185(m)		235 4		
Phosphorus Zinc Sulfur	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	limit/base	235 4 6085		
Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method	limit/base >50	235 4 6085 <1		
Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) MSTM D5185(m) Method ASTM D5185(m)		235 4 6085 <1 current	 history1	 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method		235 4 6085 <1 current	 history1	 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m)	>50	235 4 6085 <1 current 17	 history1	history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>50 >20	235 4 6085 <1 current 17 5	 history1 	 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	>50 >20 limit/base	235 4 6085 <1 current 17 5 <1 current	 history1 history1	history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) The control of th	>50 >20 limit/base NONE	235 4 6085 <1 current 17 5 <1 current NONE	history1 history1	history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal	ppm ppm ppm ppm ppm ppm ppm ppm scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD Visual*	>50 >20 limit/base NONE NONE	235 4 6085 <1 current 17 5 <1 current NONE NONE	history1 history1	history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate	ppm ppm ppm ppm ppm ppm ppm ppm scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Visual* Visual*	>50 >20 limit/base NONE NONE NONE	235 4 6085 <1 current 17 5 <1 current NONE NONE NONE	history1 history1	history2 history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt	ppm ppm ppm ppm ppm ppm ppm ppm scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Wethod Visual* Visual* Visual*	>50 >20 limit/base NONE NONE NONE NONE	235 4 6085 <1 current 17 5 <1 current NONE NONE NONE NONE	history1 history1	history2 history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris	ppm ppm ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Visual* Visual* Visual* Visual* Visual*	>50 >20 limit/base NONE NONE NONE NONE NONE NONE	235 4 6085 <1 current 17 5 <1 current NONE NONE NONE NONE NONE NONE NONE NON	history1 history1	history2 history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	ppm ppm ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD Wisual* Visual* Visual* Visual* Visual* Visual*	>50 >20 limit/base NONE NONE NONE NONE NONE NONE NONE NON	235 4 6085 <1 current 17 5 <1 current NONE NONE NONE NONE NONE NONE NONE NON	history1 history1	history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance	ppm ppm ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) METHOD Wisual* Visual* Visual* Visual* Visual* Visual* Visual* Visual*	>50 >20 limit/base NONE	235 4 6085 <1 current 17 5 <1 current NONE NONE NONE NONE NONE NONE NONE NON	history1 history1	history2 history2
Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt Appearance Odor	ppm ppm ppm ppm ppm ppm ppm ppm scalar scalar scalar scalar scalar scalar	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) Method Visual*	>50 >20 limit/base NONE NONE NONE NONE NONE NONE NONE NORML NORML >0.2	235 4 6085 <1 current 17 5 <1 current NONE NONE NONE NONE NONE NONE NONE NON	history1 history1	history2 history2



OIL ANALYSIS REPORT

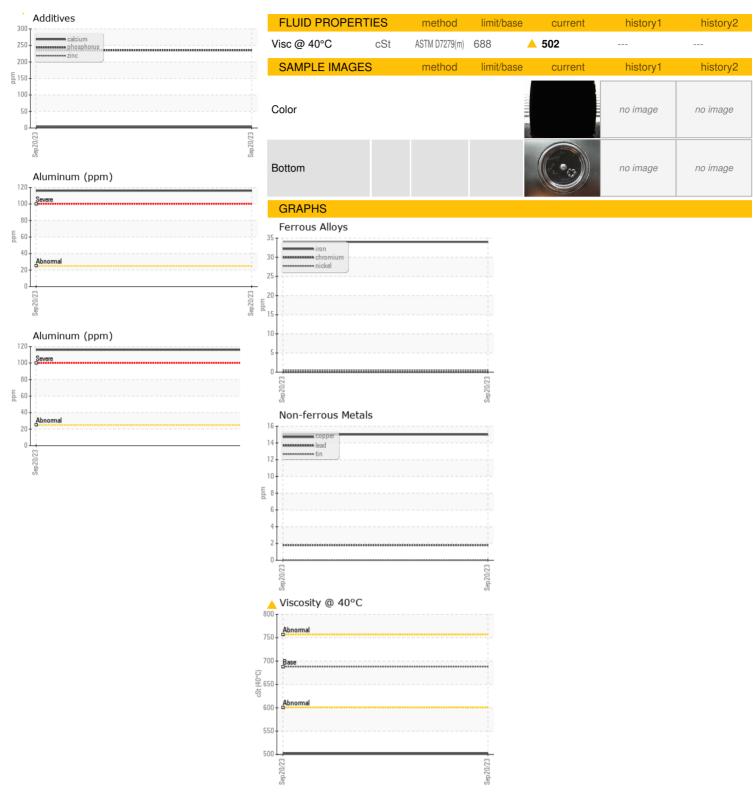



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number : 5655030

: BR0000787

: 02585964 Test Package : IND 1

Received : 28 Sep 2023 Diagnosed

: 29 Sep 2023 Diagnostician : Kevin Marson

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 CAN JER INDUSTRIAL LUBRICANT LTD 419 MISSISSIPPIAN DRIVE ESTEVAN, SK

CA S4A 2A4 Contact: LANDON LILLEJORD

llillrjord@canjer.com T:

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F: