


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



A2309177

Component **Unknown Component**

NOT GIVEN (--- GAL)

וט	IA	Gľ	ИC	51	S	

Recommendation

This is a baseline read-out on the submitted sample.

Wear

Copper and iron ppm levels are noted.

Contamination

{not applicable}


Fluid Condition

{not applicable}

SAMPLE INFORMATION method limit/base current history1 history2							
Batch # Client Info 2023 08 0641 .					Sep 2023		
Machine ID	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Department	Batch #		Client Info		2023 08 0641		
Client Info	Machine ID		Client Info		A2309177		
Production Stage Client Info Final Sent to WC Client Info 09/27/2023 Sample Number Client Info 09/27/2023 Sample Date Client Info 27 Sep 2023 Sample Date Client Info 0 Sample Date Client Info 0	Department		Client Info		Production		
Sent to WC Client Info 09/27/2023	Sample From		Client Info		Machine		
Sample Number Client Info E30000418	Production Stage		Client Info		Final		
Client Info	Sent to WC		Client Info		09/27/2023		
Machine Age	Sample Number		Client Info		E30000418		
Dil Age	Sample Date		Client Info		27 Sep 2023		
Dil Changed Client Info N/A	Machine Age	hrs	Client Info		0		
NORMAL	Oil Age	hrs	Client Info		0		
WEAR METALS method limit/base current history1 history2 iron ppm ASTM D5185(m) 24 Chromium ppm ASTM D5185(m) 0 Nickel ppm ASTM D5185(m) 0 Fitanium ppm ASTM D5185(m) 0 Aluminum ppm ASTM D5185(m) 1 Aluminum ppm ASTM D5185(m) 5 Aluminum ppm ASTM D5185(m) 167 Lead ppm ASTM D5185(m) 0 Copper ppm ASTM D5185(m) 0 Tin ppm ASTM D5185(m) 0 Antimony ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0	Oil Changed		Client Info		N/A		
Port Port	Sample Status				NORMAL		
Chromium	WEAR METALS		method	limit/base	current	history1	history2
Description		nnm	ASTM D5185(m)		24		
Nickel							
Description							
Silver							
Aluminum					-		
Description Description			. ,				
Description							
Tin ppm ASTM D5185(m) 0 Antimony ppm ASTM D5185(m) 0							
Antimony ppm ASTM D5185(m) 0							
Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 2 Barium ppm ASTM D5185(m) 0 Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) 45 Magnesium ppm ASTM D5185(m) 212 Calcium ppm ASTM D5185(m) 338 Phosphorus ppm ASTM D5185(m) 267 Sulfur ppm ASTM D5185(m) 3098 Lithium ppm ASTM D5185(m) 2 <td></td> <td></td> <td>. ,</td> <td></td> <td></td> <td></td> <td></td>			. ,				
Description	•		, ,		-		
Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) 2 Barium ppm ASTM D5185(m) <1 Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) 45 Magnesium ppm ASTM D5185(m) 212 Phosphorus ppm ASTM D5185(m) 338 Phosphorus ppm ASTM D5185(m) 267 Zinc ppm ASTM D5185(m) 3098 Sulfur ppm ASTM D5185(m) <1 Lithium ppm ASTM D5185(m) 2 CONTAMINANTS method limit/base current			. ,		_		
ADDITIVES	-		. ,		-		
Boron ppm ASTM D5185(m) 2		ppm			U		
Barium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) <1	Boron	ppm	. ,				
Manganese ppm ASTM D5185(m) <1 Magnesium ppm ASTM D5185(m) 45 Calcium ppm ASTM D5185(m) 212 Phosphorus ppm ASTM D5185(m) 338 Zinc ppm ASTM D5185(m) 267 Sulfur ppm ASTM D5185(m) 3098 Lithium ppm ASTM D5185(m) <1		ppm	. ,				
Magnesium ppm ASTM D5185(m) 45 Calcium ppm ASTM D5185(m) 212 Phosphorus ppm ASTM D5185(m) 338 Zinc ppm ASTM D5185(m) 267 Sulfur ppm ASTM D5185(m) 3098 Lithium ppm ASTM D5185(m) <1	•	ppm	. ,		0		
Calcium ppm ASTM D5185(m) 212 Phosphorus ppm ASTM D5185(m) 338 Zinc ppm ASTM D5185(m) 267 Sulfur ppm ASTM D5185(m) 3098 Lithium ppm ASTM D5185(m) <1	-	ppm	, ,		<1		
Phosphorus ppm ASTM D5185(m) 338 Zinc ppm ASTM D5185(m) 267 Sulfur ppm ASTM D5185(m) 3098 Lithium ppm ASTM D5185(m) <1			. ,		_		
Zinc ppm ASTM D5185(m) 267 Sulfur ppm ASTM D5185(m) 3098		ppm	, ,				
Sulfur ppm ASTM D5185(m) 3098 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) 6 Potassium ppm ASTM D5185(m) >20 <1			. ,				
CONTAMINANTS method limit/base current history1 history2 Sollicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) 6 Potassium ppm ASTM D5185(m) >20 <1							
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) 6 Potassium ppm ASTM D5185(m) >20 <1		ppm					
Silicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) 6 Potassium ppm ASTM D5185(m) >20 <1 Water % ASTM D6304* 0.001	Lithium	ppm	ASTM D5185(m)		<1		
Sodium ppm ASTM D5185(m) 6 Potassium ppm ASTM D5185(m) >20 <1	CONTAMINANTS	;	method	limit/base	current	history1	history2
Potassium ppm ASTM D5185(m) >20 <1 Water % ASTM D6304* 0.001	Silicon	ppm	ASTM D5185(m)		2		
Water % ASTM D6304* 0.001	Sodium	ppm	ASTM D5185(m)		6		
	Potassium	ppm	ASTM D5185(m)	>20	<1		
ppm Water ppm ASTM D6304* 10.7	Water	%	ASTM D6304*		0.001		
	opm Water	ppm	ASTM D6304*		10.7		



OIL ANALYSIS REPORT

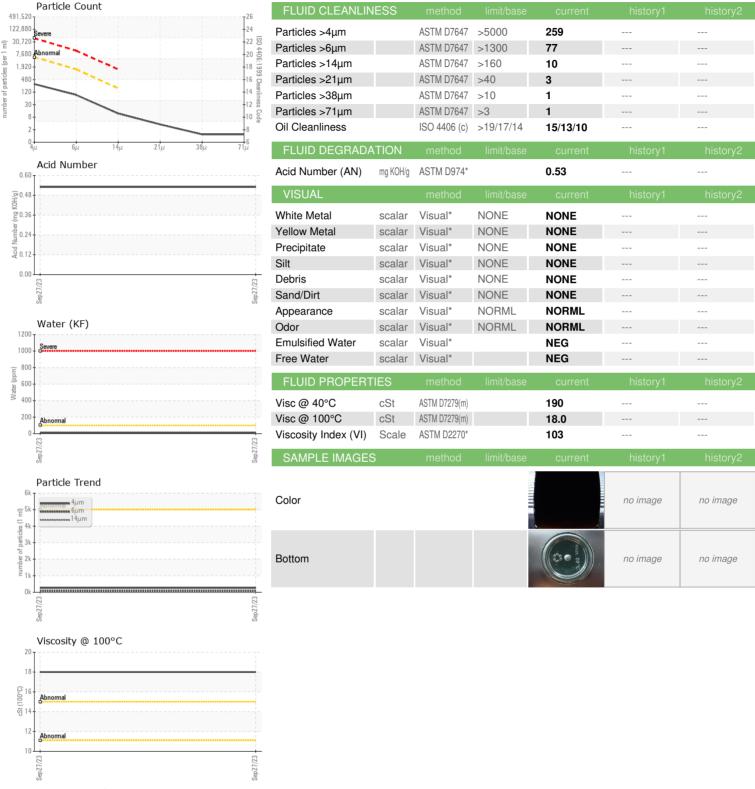



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

: E30000418 : 02586120

Received Diagnosed : 5655186

: 05 Oct 2023 Diagnostician : Tatiana Sorkina Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

: 02 Oct 2023

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON **CA K9A 5H5** Contact: Aylwin Lee aylwinlee@e360s.ca T: (905)372-2251

F: (905)373-4950