


OIL ANALYSIS REPORT

Sample Rating Trend







A2309172

Component **Quench Oil**

NOT GIVEN (--- GAL)

Recommendation

This is a baseline read-out on the submitted sample.

Wear

Copper ppm levels are noted.

Contamination

{not applicable}


Fluid Condition

{not applicable}

SAMPLE INFORMATION method limit/base current history1 history2							
Batch # Client Info 2023 09 0340					Sep 2023		
Machine ID	SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Department	Batch #		Client Info		2023 09 0340		
Client Info	Machine ID		Client Info		A2309172		
Production Stage Client Info Final Sent to WC Client Info 09/27/2023 Sample Number Client Info 09/27/2023 Sample Date Client Info 26 Sep 2023 Sample Date Client Info 0 Sample Date Client Info 0	Department		Client Info		Production		
Sent to WC Client Info 09/27/2023	Sample From		Client Info		Machine		
Client Info Client Info	Production Stage		Client Info		Final		
Comparison	Sent to WC		Client Info		09/27/2023		
Machine Age	Sample Number		Client Info		E30000416		
Dil Age	Sample Date		Client Info		26 Sep 2023		
Dil Changed Client Info N/A	Machine Age	hrs	Client Info		0		
NORMAL	Oil Age	hrs	Client Info		0		
WEAR METALS method limit/base current history1 history2 ron ppm ASTM D5185(m) 8 Chromium ppm ASTM D5185(m) 0 Nickel ppm ASTM D5185(m) 0 Ifitanium ppm ASTM D5185(m) 0 Aluminum ppm ASTM D5185(m) 0 Aluminum ppm ASTM D5185(m) 0 Aluminum ppm ASTM D5185(m) 0 Lead ppm ASTM D5185(m) 0 Copper ppm ASTM D5185(m) 0 Popper ppm ASTM D5185(m) 0 Antimony ppm ASTM D5185(m) 0 Poppilium ppm ASTM D5185(m) 0	Oil Changed		Client Info		N/A		
Port	Sample Status				NORMAL		
ASTM D5185(m) B Chromium ppm ASTM D5185(m) Q Chromium Q Chromium	WEAR METALS		method	limit/base	current	history1	history2
Description		nnm	ASTM D5185(m)		8		
ASTM D5185(m) Company Company ASTM D5185(m) Company Company			. ,				
Description					-		
Silver							
Aluminum					-		
Lead	-		. ,				
Description					-		
Antimony							
Antimony ppm ASTM D5185(m) 0							
Vanadium ppm ASTM D5185(m) 0 Beryllium ppm ASTM D5185(m) 0 Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) <1 Barium ppm ASTM D5185(m) 0 Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) 0 Magnesium ppm ASTM D5185(m) 22 Calcium ppm ASTM D5185(m) 22 Phosphorus ppm ASTM D5185(m) 287 Sulfur ppm ASTM D5185(m) 287 CONTAMINANTS method limit/base current <t< td=""><td></td><td></td><td>. ,</td><td></td><td></td><td></td><td></td></t<>			. ,				
Description	-		, ,				
Cadmium ppm ASTM D5185(m) 0 ADDITIVES method limit/base current history1 history2 Boron ppm ASTM D5185(m) <1 Barium ppm ASTM D5185(m) 0 Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) <1 Magnesium ppm ASTM D5185(m) 22 Phosphorus ppm ASTM D5185(m) 22 Phosphorus ppm ASTM D5185(m) 6 Zinc ppm ASTM D5185(m) 287 Sulfur ppm ASTM D5185(m) <1 Lithium ppm ASTM D5185(m) 2 CONTAMINANTS method limit/base current h			. ,				
ADDITIVES	-		. ,		-		
Boron ppm ASTM D5185(m) <1		ррпп			<u> </u>		
Sarium	ADDITIVES		method	limit/base	current	history1	history2
Molybdenum ppm ASTM D5185(m) 0 Manganese ppm ASTM D5185(m) 0 Magnesium ppm ASTM D5185(m) 22 Calcium ppm ASTM D5185(m) 22 Phosphorus ppm ASTM D5185(m) 22 Zinc ppm ASTM D5185(m) 287 Sulfur ppm ASTM D5185(m) <1			. ,				
Manganese ppm ASTM D5185(m) 0 Magnesium ppm ASTM D5185(m) <1		ppm	. ,				
Magnesium ppm ASTM D5185(m) <1 Calcium ppm ASTM D5185(m) 22 Phosphorus ppm ASTM D5185(m) 22 Zinc ppm ASTM D5185(m) 287 Sulfur ppm ASTM D5185(m) <1	-	ppm	. ,				
Calcium ppm ASTM D5185(m) 22 Phosphorus ppm ASTM D5185(m) 22 Zinc ppm ASTM D5185(m) 6 Sulfur ppm ASTM D5185(m) 287 Lithium ppm ASTM D5185(m) <1	-	ppm	, ,		0		
Phosphorus ppm ASTM D5185(m) 22 Zinc ppm ASTM D5185(m) 6 Sulfur ppm ASTM D5185(m) 287 Lithium ppm ASTM D5185(m) <1			. ,				
Zinc ppm ASTM D5185(m) 6 Sulfur ppm ASTM D5185(m) 287		ppm					
Sulfur ppm ASTM D5185(m) 287 Lithium ppm ASTM D5185(m) <1 CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) <1 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* 0.00			. ,				
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) <1							
CONTAMINANTS method limit/base current history1 history2 Silicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) <1							
Silicon ppm ASTM D5185(m) 2 Sodium ppm ASTM D5185(m) <1 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* 0.00	_ithium	ppm	ASTM D5185(m)		<1		
Sodium ppm ASTM D5185(m) <1 Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* 0.00	CONTAMINANTS	;	method	limit/base	current	history1	history2
Potassium ppm ASTM D5185(m) >20 0 Water % ASTM D6304* 0.00	Silicon	ppm	ASTM D5185(m)		2		
Water % ASTM D6304* 0.00	Sodium	ppm	ASTM D5185(m)		<1		
	Potassium	ppm	ASTM D5185(m)	>20	0		
ppm Water	Water	%	ASTM D6304*		0.00		
	opm Water	ppm	ASTM D6304*		0.00		



OIL ANALYSIS REPORT

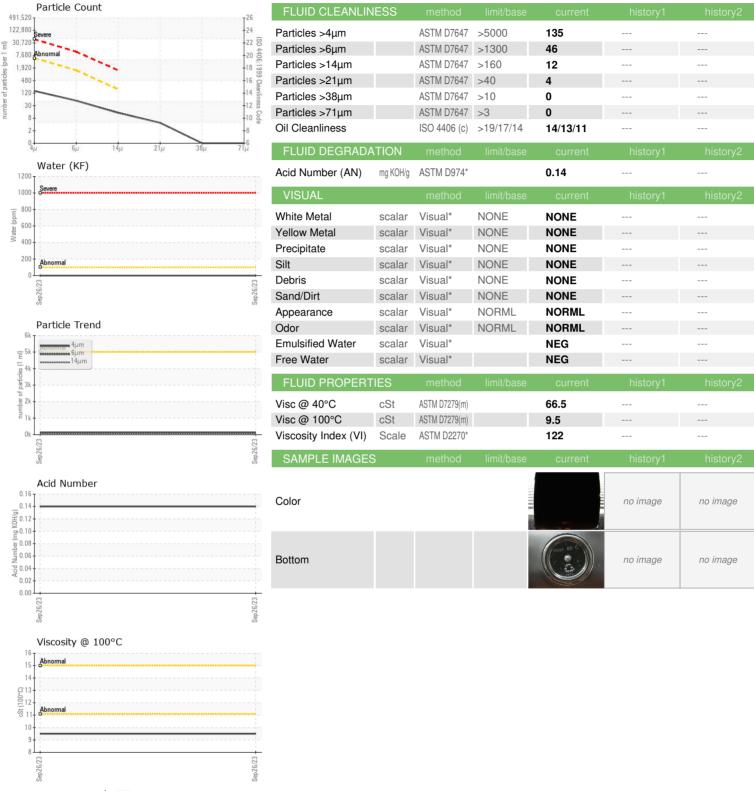



CALA ISO 17025:2017 Accredited

Laboratory

Laboratory Sample No. Lab Number **Unique Number**

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : E30000416

: 02586184 : 5655250

Received Diagnosed

: 05 Oct 2023 Diagnostician : Tatiana Sorkina

: 02 Oct 2023

Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON **CA K9A 5H5** Contact: Aylwin Lee aylwinlee@e360s.ca

> T: (905)372-2251 F: (905)373-4950