


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



STRETCHER TAIL STOCK

Component

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Jan 2023	Sep2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0857818	WC0780957	
Sample Date		Client Info		25 Sep 2023	20 Jan 2023	
Machine Age	hrs	Client Info		0	0	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	2	
Chromium	ppm	ASTM D5185(m)	>20	0	<1	
Nickel	ppm	ASTM D5185(m)	>20	0	0	
Titanium	ppm	ASTM D5185(m)		0	0	
Silver	ppm	ASTM D5185(m)		<1	0	
Aluminum	ppm	ASTM D5185(m)	>20	0	0	
Lead	ppm	ASTM D5185(m)	>20	0	<1	
Copper	ppm	ASTM D5185(m)	>20	<1	8	
Tin	ppm	ASTM D5185(m)	>20	0	<1	
Antimony	ppm	ASTM D5185(m)		0	<1	
Vanadium	ppm	ASTM D5185(m)		0	0	
Beryllium	ppm	ASTM D5185(m)		0	0	
Cadmium	ppm	ASTM D5185(m)		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1	<1	
Barium	ppm	ASTM D5185(m)	5	<1	0	
Molybdenum	ppm	ASTM D5185(m)	5	0	0	
Manganese	ppm	ASTM D5185(m)		0	0	
Magnesium	ppm	ASTM D5185(m)	25	0	<1	
Calcium	ppm	ASTM D5185(m)	200	36	51	
Phosphorus	ppm	ASTM D5185(m)	300	334	351	
Zinc	ppm	ASTM D5185(m)	370	412	402	
Sulfur	ppm	ASTM D5185(m)	2500	705	855	
Lithium	ppm	ASTM D5185(m)		<1	<1	
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	<1	
Sodium	ppm	ASTM D5185(m)		<1	<1	
Potassium	ppm	ASTM D5185(m)	>20	0	0	
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	683	<u></u> 5665	
Particles >6µm		ASTM D7647	>1300	206	<u>▲</u> 1826	
Particles >14μm		ASTM D7647	>160	19	153	
Particles >21µm		ASTM D7647	>40	7	41	
Particles >38µm		ASTM D7647	>10	1	1	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/11	<u>△</u> 20/18/14	
FLUID DEGRAD	ATION _	method	limit/base	current	history1	history2
		1071100711				



OIL ANALYSIS REPORT

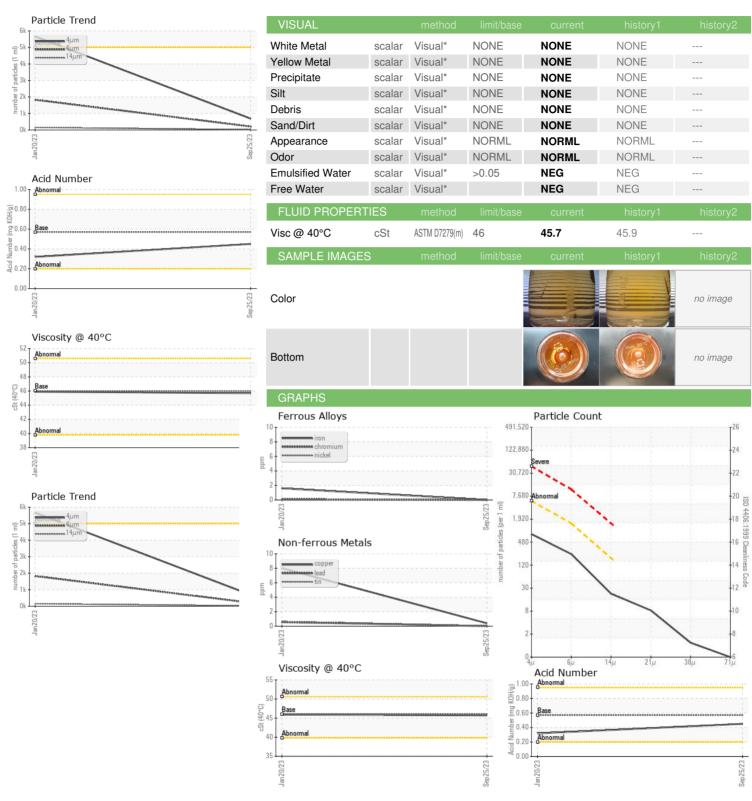



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number **Unique Number**

Test Package

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : 02586430

: IND 2

: WC0857818 : 5655496

Received Diagnosed

: 03 Oct 2023 : 04 Oct 2023 : Wes Davis Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

ASTREX 383 PATILLO RD WINDSOR, ON **CA N8N 2L9**

Contact: Guilherme Medeiros Guilherme.Medeiros@astrex.ca T: (226)363-0100