


OIL ANALYSIS REPORT







COLD SAW Component

Hydraulic System

AW HYDRAULIC OIL ISO 46 (--- GAL)

| וט | Δ | | u 🗪 | | |
|----|----------|----|--------|--------|---------|
| | \sim | чι | \sim | \sim | \cdot |

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Sep 2023 | | |
|-----------------|--------|---------------|------------|-------------|----------|----------|
| SAMPLE INFOR | MATION | method | limit/base | current | history1 | history2 |
| Sample Number | | Client Info | | WC0857815 | | |
| Sample Date | | Client Info | | 25 Sep 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185(m) | >20 | <1 | | |
| Chromium | ppm | ASTM D5185(m) | >20 | <1 | | |
| Nickel | ppm | ASTM D5185(m) | >20 | 0 | | |
| Titanium | ppm | ASTM D5185(m) | | 0 | | |
| Silver | ppm | ASTM D5185(m) | | <1 | | |
| Aluminum | ppm | ASTM D5185(m) | >20 | <1 | | |
| Lead | ppm | ASTM D5185(m) | >20 | <1 | | |
| Copper | ppm | ASTM D5185(m) | >20 | <1 | | |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | | |
| Antimony | ppm | ASTM D5185(m) | | 0 | | |
| Vanadium | ppm | ASTM D5185(m) | | 0 | | |
| Beryllium | ppm | ASTM D5185(m) | | 0 | | |
| Cadmium | ppm | ASTM D5185(m) | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185(m) | 5 | <1 | | |
| Barium | ppm | ASTM D5185(m) | 5 | <1 | | |
| Molybdenum | ppm | ASTM D5185(m) | 5 | 0 | | |
| Manganese | ppm | ASTM D5185(m) | | 0 | | |
| Magnesium | ppm | ASTM D5185(m) | 25 | 0 | | |
| Calcium | ppm | ASTM D5185(m) | 200 | 36 | | |
| Phosphorus | ppm | ASTM D5185(m) | 300 | 328 | | |
| Zinc | ppm | ASTM D5185(m) | 370 | 404 | | |
| Sulfur | ppm | ASTM D5185(m) | 2500 | 782 | | |
| Lithium | ppm | ASTM D5185(m) | | <1 | | |
| CONTAMINANT | S | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185(m) | >15 | <1 | | |
| Sodium | ppm | ASTM D5185(m) | | 2 | | |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | | |
| FLUID CLEANLI | NESS _ | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >5000 | 4430 | | |
| Particles >6µm | | ASTM D7647 | >1300 | 960 | | |
| Particles >14µm | | ASTM D7647 | >160 | 51 | | |
| Particles >21µm | | ASTM D7647 | >40 | 12 | | |
| Particles >38µm | | ASTM D7647 | >10 | 1 | | |
| Particles >71µm | | ASTM D7647 | >3 | 1 | | |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 19/17/13 | | |
| FLUID DEGRAD | ATION_ | method | limit/base | current | history1 | history2 |
| | | | | | | |



OIL ANALYSIS REPORT

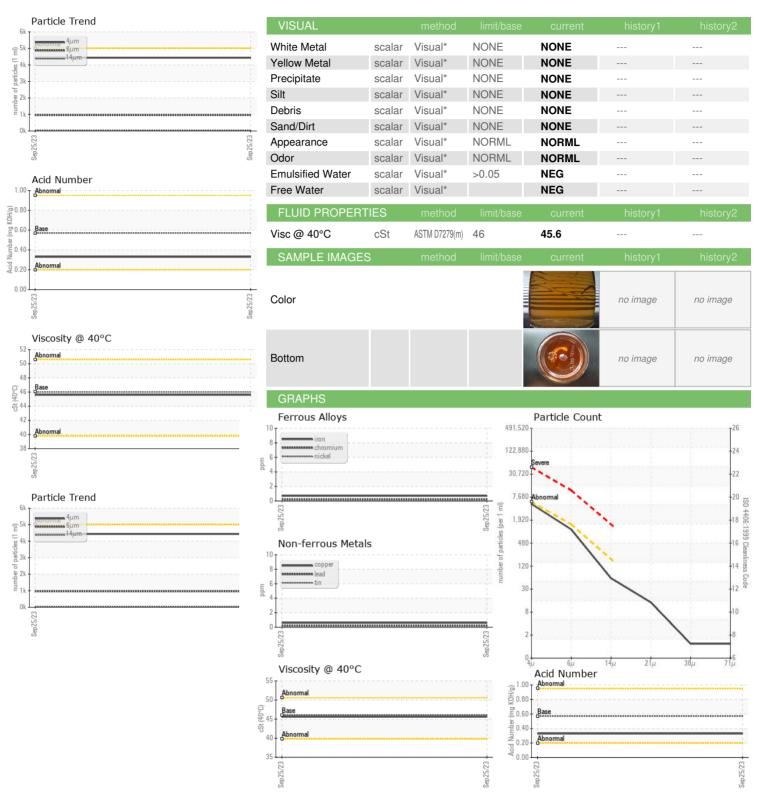



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number Unique Number

Test Package : IND 2

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : WC0857815

: 02586437 : 5655503

Received

: 03 Oct 2023 : 04 Oct 2023 Diagnosed : Wes Davis

Diagnostician

To discuss this sample report, contact Customer Service at 1-800-268-2131. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

ASTREX 383 PATILLO RD WINDSOR, ON **CA N8N 2L9** Contact: John Goetz john.goetz@astrex.ca T: (226)350-4422