




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

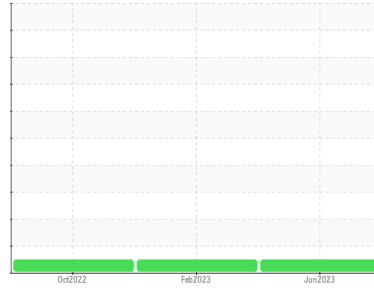

Machine Id  
**2324**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0796314</b>	WC0703009	WC0702737
Sample Date	Client Info		<b>01 Jun 2023</b>	10 Feb 2023	31 Oct 2022
Machine Age	kms	Client Info	<b>145923</b>	100758	50760
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	<b>13</b>	22	17
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>5</b>	11	8
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	2	2
Copper	ppm	ASTM D5185(m)	>330	<b>2</b>	7	2
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	2	1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>5</b>	6	2
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>62</b>	60	58
Manganese	ppm	ASTM D5185(m)		<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185(m)		<b>969</b>	930	957
Calcium	ppm	ASTM D5185(m)		<b>1097</b>	1191	1073
Phosphorus	ppm	ASTM D5185(m)	1260	<b>996</b>	1084	1045
Zinc	ppm	ASTM D5185(m)	1400	<b>1223</b>	1204	1178
Sulfur	ppm	ASTM D5185(m)		<b>2494</b>	2521	2470
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	11	7
Sodium	ppm	ASTM D5185(m)		<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m)	>20	<b>9</b>	26	21

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0.1</b>	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.8</b>	7.9	8.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>19.5</b>	21.6	20.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>15.5</b>	16.1	16.1











# OIL ANALYSIS REPORT

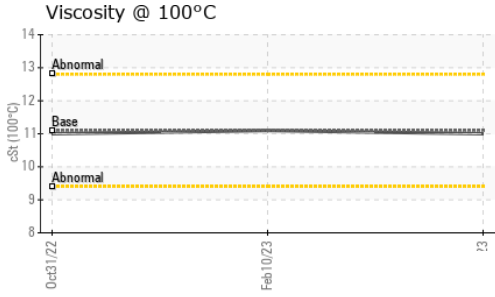

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	11.1	11.1	11.0

## GRAPHS

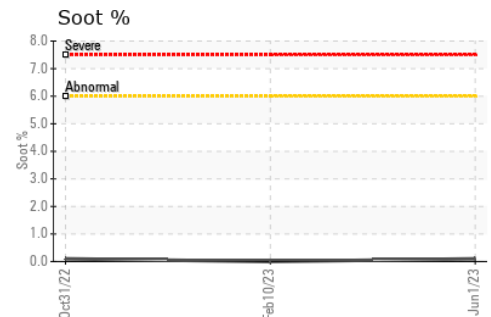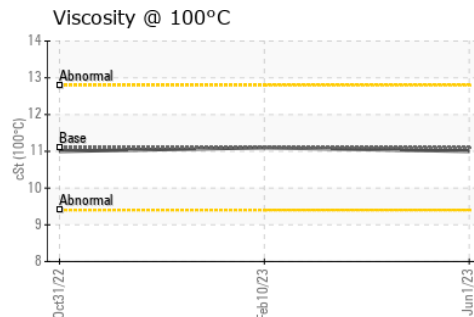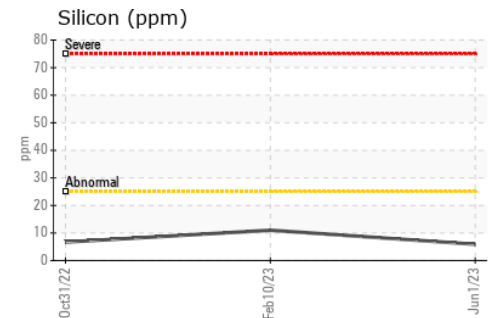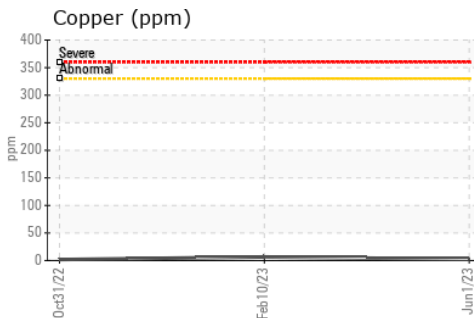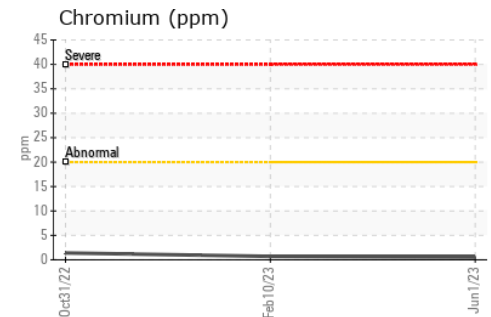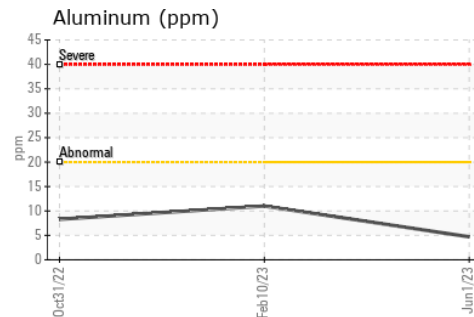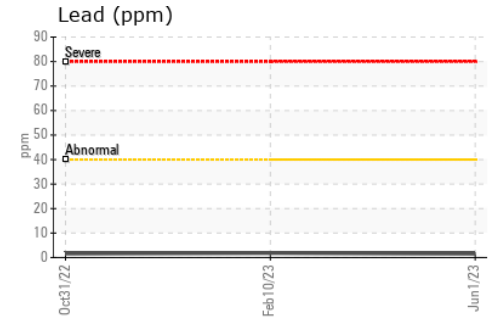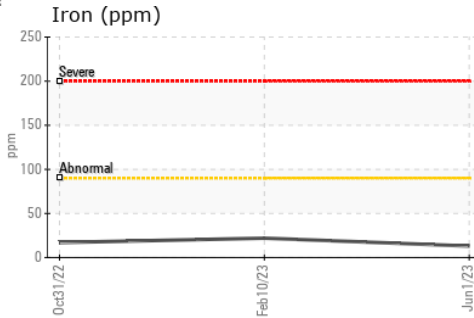

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0796314 **Received** : 05 Oct 2023  
**Lab Number** : 02587073 **Diagnosed** : 05 Oct 2023  
**Unique Number** : 5656139 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.