



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id

**2217**

Component

**Diesel Engine**

Fluid

**DISEL ENGINE OIL SAE 10W30 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0796533</b>	---	---
Sample Date	Client Info		<b>02 Jun 2023</b>	---	---
Machine Age	kms	Client Info	<b>352409</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >90	<b>15</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >20	<b>10</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>1</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m) 10	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 100	<b>61</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m) 450	<b>994</b>	---	---
Calcium	ppm	ASTM D5185(m) 3000	<b>1103</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	<b>1013</b>	---	---
Zinc	ppm	ASTM D5185(m) 1350	<b>1244</b>	---	---
Sulfur	ppm	ASTM D5185(m) 4250	<b>2531</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>4</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>3</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>22</b>	---	---

## INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >6	<b>0.2</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>8.3</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>19.6</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>15.7</b>	---	---











# OIL ANALYSIS REPORT

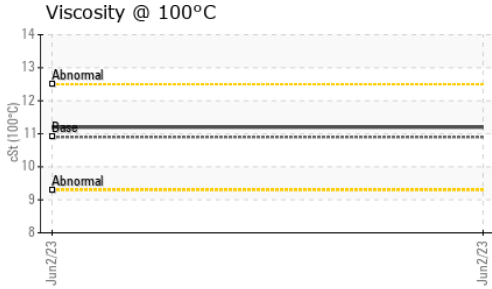

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.2	---

### GRAPHS

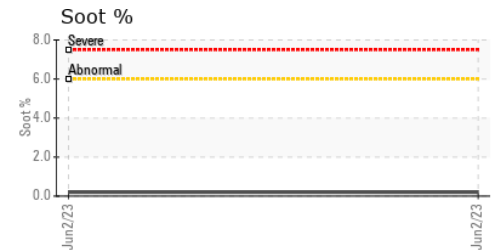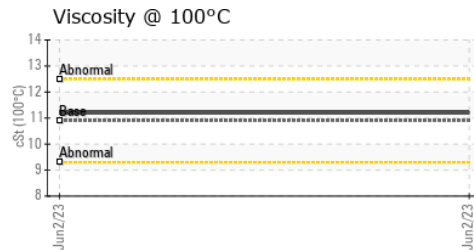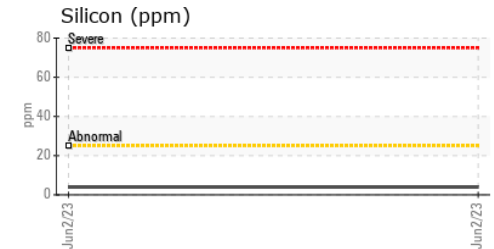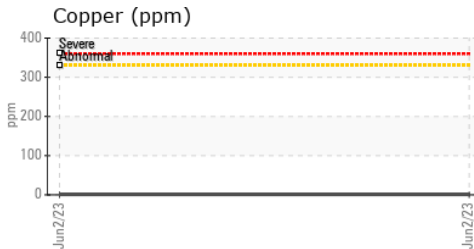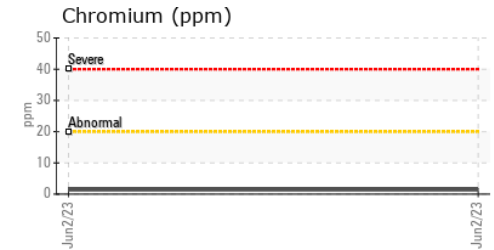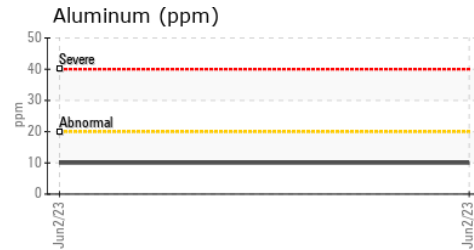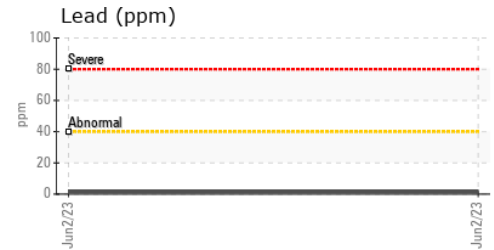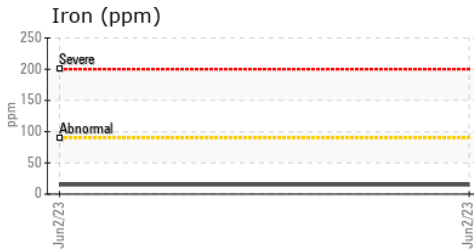

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0796533      **Received** : 05 Oct 2023  
**Lab Number** : 02587082      **Diagnosed** : 05 Oct 2023  
**Unique Number** : 5656148      **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.