




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

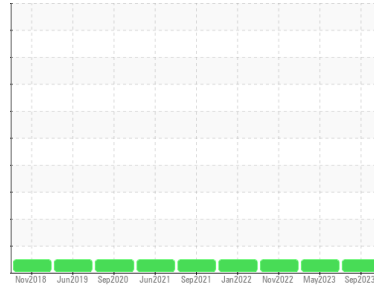

Area  
**Propulsion**  
 Machine Id  
**PS ME (S/N 512100616)**  
 Component  
**Port Main Engine**  
 Fluid  
**SHELL ROTELLA T4 15W40 (70 LTR)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC</b>	WC	WC
Sample Date	Client Info			<b>25 Sep 2023</b>	16 May 2023	07 Nov 2022
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	<b>7</b>	5	4
Chromium	ppm	ASTM D5185(m)	>8	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>18	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185(m)	>80	<b>2</b>	2	4
Tin	ppm	ASTM D5185(m)	>14	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>92</b>	118	125
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>13</b>	12	12
Calcium	ppm	ASTM D5185(m)		<b>2359</b>	2403	2255
Phosphorus	ppm	ASTM D5185(m)		<b>997</b>	1090	1042
Zinc	ppm	ASTM D5185(m)		<b>1206</b>	1238	1144
Sulfur	ppm	ASTM D5185(m)		<b>2918</b>	3023	2988
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>20	<b>7</b>	9	2
Sodium	ppm	ASTM D5185(m)	>75	<b>3</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>6</b>	7	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0.3</b>	0.3	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.1</b>	8.7	8.4
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.2</b>	23.4	23.2



# OIL ANALYSIS REPORT



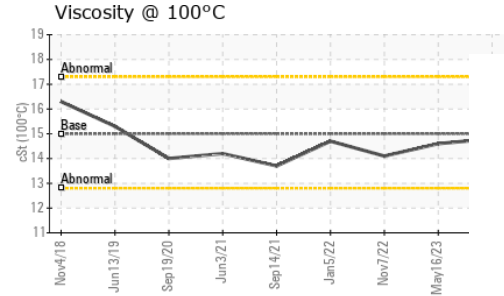
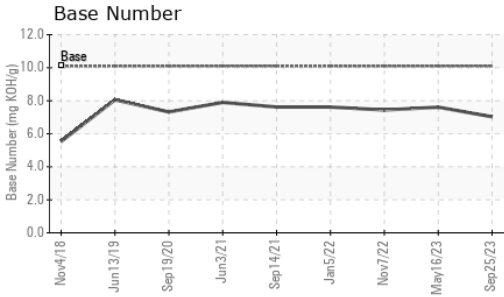


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>19.2</b>	19.0	18.8
Base Number (BN)	mg KOH/g	ASTM D2896*	10.1	<b>7.03</b>	7.61	7.44

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	15	<b>14.8</b>	14.6	14.1

## GRAPHS

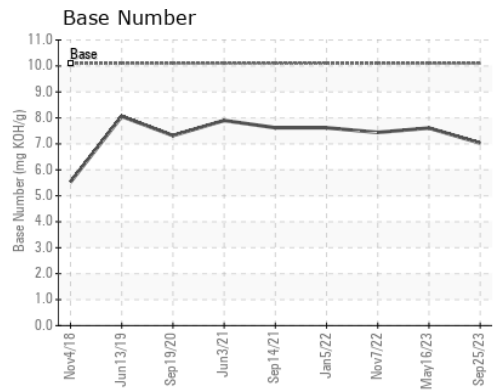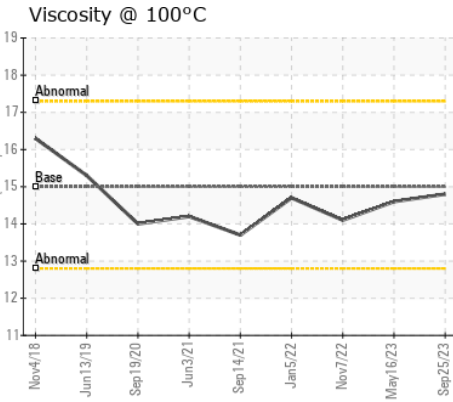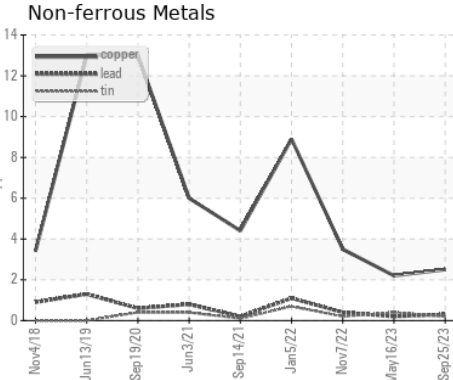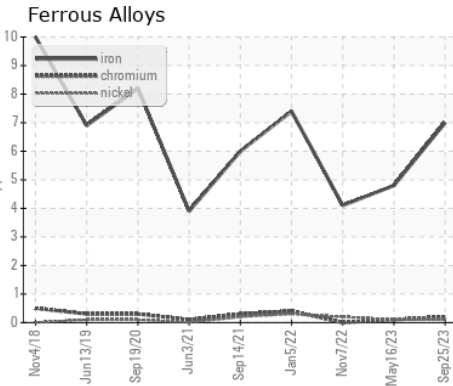

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02587134  
**Unique Number** : 5656200  
**Test Package** : MAR 2  
**Received** : 05 Oct 2023  
**Diagnosed** : 10 Oct 2023  
**Diagnostician** : Kevin Marson

**Canadian Coast Guard**  
 CCGS Pennant Bay, 72 West Street  
 St. John's, NL  
 CA A0K 4S0  
 Contact: Marc Cull  
 pennantbay@ccgs-ngcc.gc.ca  
 T: (709)454-2207  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.