




# PROBLEM SUMMARY


Area  
**[7811380]**  
 Machine Id  
**TINKER OMEGA PH82503 TRAY STAKER (S/N MIP-1224)**  
 Component  
**Hydraulic System**  
 Fluid  
**CASTROL HYPSPIN DHV 46 (225 LTR)**

Sample Rating Trend

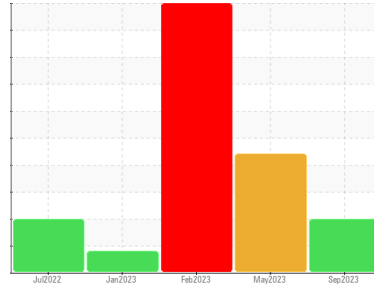

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

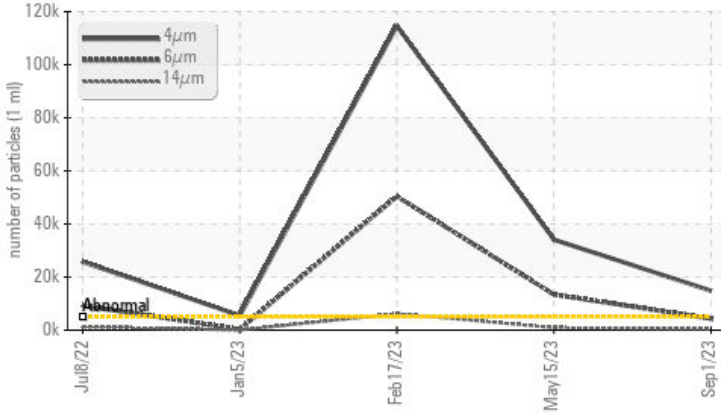

## RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

| Sample Status   | ASTM D7647   | ASTM D7647 | ABNORMAL   | SEVERE     | SEVERE     |
|-----------------|--------------|------------|------------|------------|------------|
| Particles >4µm  | >5000        | ▲ 14844    | ▲ 34096    | ● 114662   |            |
| Particles >6µm  | >1300        | ▲ 4340     | ● 13426    | ● 50426    |            |
| Particles >14µm | >160         | ▲ 341      | ▲ 907      | ● 6195     |            |
| Particles >21µm | >40          | ▲ 64       | ▲ 196      | ● 1809     |            |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14  | ▲ 21/19/16 | ● 22/21/17 | ● 24/23/20 |

Customer Id: ESCPOR  
 Sample No.: WC0741319  
 Lab Number: 02587155  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

| Action        | Status | Date | Done By | Description   |
|---------------|--------|------|---------|---|
| Change Filter | ---    | ---  | ?       | We recommend you service the filters on this component.   |
| Resample      | ---    | ---  | ?       | We recommend an early resample to monitor this condition. |

## HISTORICAL DIAGNOSIS

ISO



### 15 May 2023 Diag: Kevin Marson

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. We suspect that the abnormal contaminant(s) is the result of incorrect sampling technique. **DISCLAIMER:** Interpretation of results is based on the sample as received from the customer. The condition of the sample and the method of sampling cannot be verified. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the oil. Light concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



ISO



### 17 Feb 2023 Diag: Wes Davis

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the oil. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



ISO



### 05 Jan 2023 Diag: Wes Davis

We recommend you service the filters on this component. Resample at the next service interval to monitor. All component wear rates are normal. There is a light amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

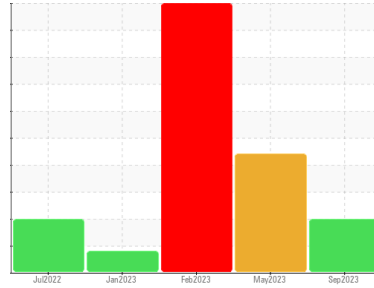

ISO



Area  
**[7811380]**  
 Machine Id  
**TINKER OMEGA PH82503 TRAY STAKER (S/N MIP-1224)**  
 Component  
**Hydraulic System**  
 Fluid  
**CASTROL HYPSPIN DHV 46 (225 LTR)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>WC0741319</b>   | WC0741329   | WC0741325   |
| Sample Date   | Client Info |             | <b>01 Sep 2023</b> | 15 May 2023 | 17 Feb 2023 |
| Machine Age   | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Age       | hrs         | Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info |             | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |             |             | <b>ABNORMAL</b>    | SEVERE      | SEVERE      |

## WEAR METALS

|           | method | limit/base    | current | history1     | history2 |
|-----------|--------|---------------|---------|--------------|----------|
| Iron      | ppm    | ASTM D5185(m) | >20     | <b>3</b>     | <1       |
| Chromium  | ppm    | ASTM D5185(m) | >20     | <b>0</b>     | 0        |
| Nickel    | ppm    | ASTM D5185(m) | >20     | <b>0</b>     | <1       |
| Titanium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        |
| Silver    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 0        |
| Aluminum  | ppm    | ASTM D5185(m) | >20     | <b>&lt;1</b> | <1       |
| Lead      | ppm    | ASTM D5185(m) | >20     | <b>&lt;1</b> | 0        |
| Copper    | ppm    | ASTM D5185(m) | >20     | <b>1</b>     | <1       |
| Tin       | ppm    | ASTM D5185(m) | >20     | <b>0</b>     | 0        |
| Antimony  | ppm    | ASTM D5185(m) |         | <b>0</b>     | <1       |
| Vanadium  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        |
| Beryllium | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        |
| Cadmium   | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        |

## ADDITIVES

|            | method | limit/base    | current | history1     | history2 |
|------------|--------|---------------|---------|--------------|----------|
| Boron      | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 7        |
| Barium     | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 0        |
| Molybdenum | ppm    | ASTM D5185(m) |         | <b>0</b>     | 3        |
| Manganese  | ppm    | ASTM D5185(m) |         | <b>0</b>     | 0        |
| Magnesium  | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 23       |
| Calcium    | ppm    | ASTM D5185(m) |         | <b>13</b>    | 109      |
| Phosphorus | ppm    | ASTM D5185(m) |         | <b>512</b>   | 409      |
| Zinc       | ppm    | ASTM D5185(m) |         | <b>608</b>   | 483      |
| Sulfur     | ppm    | ASTM D5185(m) |         | <b>4147</b>  | 1355     |
| Lithium    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | <1       |

## CONTAMINANTS

|           | method | limit/base    | current | history1     | history2 |
|-----------|--------|---------------|---------|--------------|----------|
| Silicon   | ppm    | ASTM D5185(m) | >15     | <b>14</b>    | 3        |
| Sodium    | ppm    | ASTM D5185(m) |         | <b>&lt;1</b> | 0        |
| Potassium | ppm    | ASTM D5185(m) | >20     | <b>0</b>     | <1       |

## FLUID CLEANLINESS





|                 | method       | limit/base | current           | history1   | history2   |
|-----------------|--------------|------------|-------------------|------------|------------|
| Particles >4µm  | ASTM D7647   | >5000      | <b>▲ 14844</b>    | ▲ 34096    | ● 114662   |
| Particles >6µm  | ASTM D7647   | >1300      | <b>▲ 4340</b>     | ● 13426    | ● 50426    |
| Particles >14µm | ASTM D7647   | >160       | <b>▲ 341</b>      | ▲ 907      | ● 6195     |
| Particles >21µm | ASTM D7647   | >40        | <b>▲ 64</b>       | ▲ 196      | ● 1809     |
| Particles >38µm | ASTM D7647   | >10        | <b>4</b>          | 5          | ● 92       |
| Particles >71µm | ASTM D7647   | >3         | <b>1</b>          | 0          | ▲ 7        |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14  | <b>▲ 21/19/16</b> | ● 22/21/17 | ● 24/23/20 |

## FLUID DEGRADATION

|                  | method   | limit/base | current | history1    | history2 |
|------------------|----------|------------|---------|-------------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.15    | <b>0.58</b> | 0.42     |




# OIL ANALYSIS REPORT

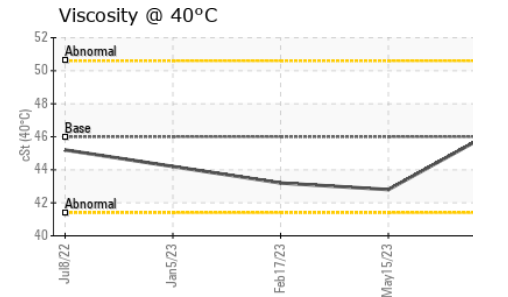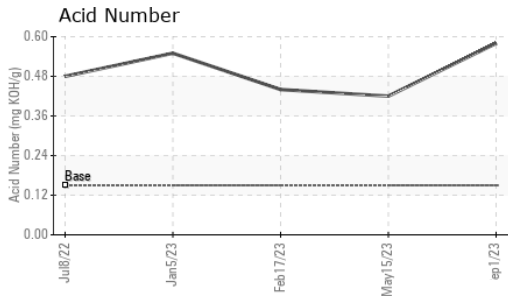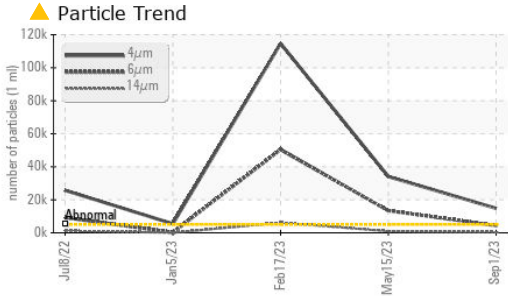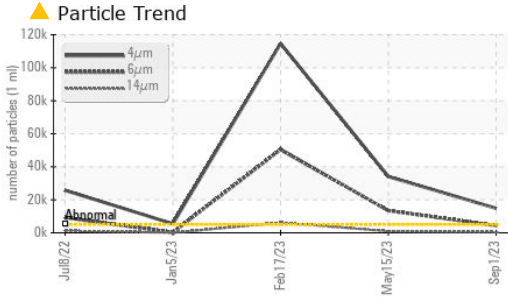





| VISUAL           | method | limit/base | current | history1 | history2 |       |
|------------------|--------|------------|---------|----------|----------|-------|
| White Metal      | scalar | Visual*    | NONE    | NONE     | VLITE    | NONE  |
| Yellow Metal     | scalar | Visual*    | NONE    | NONE     | NONE     | NONE  |
| Precipitate      | scalar | Visual*    | NONE    | NONE     | NONE     | NONE  |
| Silt             | scalar | Visual*    | NONE    | NONE     | NONE     | NONE  |
| Debris           | scalar | Visual*    | NONE    | NONE     | ▲ LIGHT  | NONE  |
| Sand/Dirt        | scalar | Visual*    | NONE    | NONE     | NONE     | VLITE |
| Appearance       | scalar | Visual*    | NORML   | NORML    | NORML    | NORML |
| Odor             | scalar | Visual*    | NORML   | NORML    | NORML    | NORML |
| Emulsified Water | scalar | Visual*    | >0.05   | NEG      | NEG      | NEG   |
| Free Water       | scalar | Visual*    |         | NEG      | NEG      | NEG   |

| FLUID PROPERTIES | method | limit/base    | current | history1 | history2 |      |
|------------------|--------|---------------|---------|----------|----------|------|
| Visc @ 40°C      | cSt    | ASTM D7279(m) | 46.0    | 46.4     | 42.8     | 43.2 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

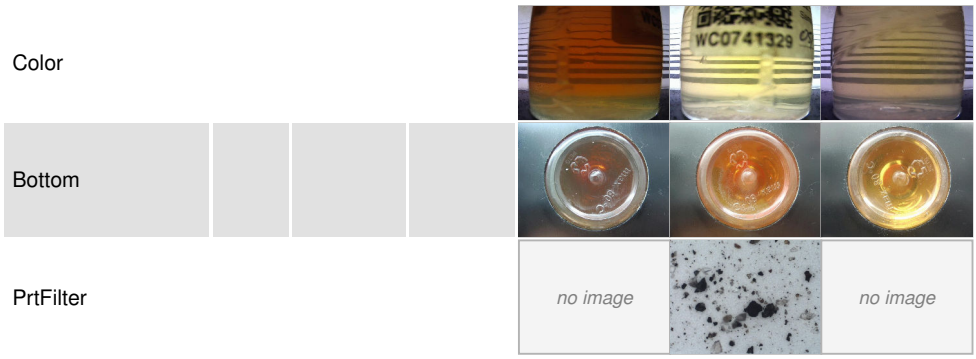

## GRAPHS

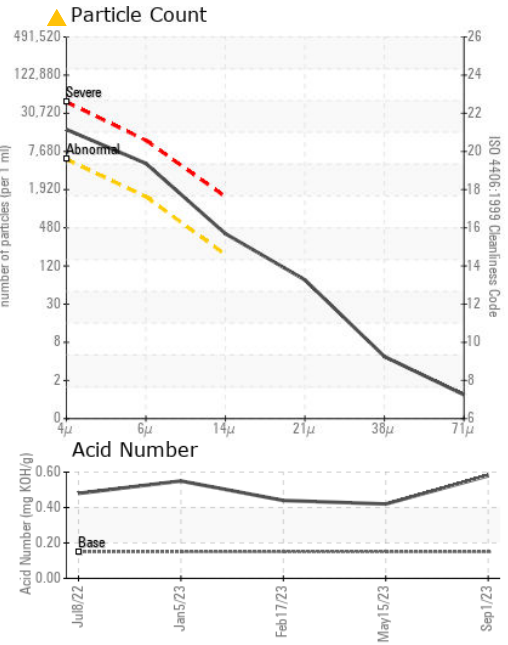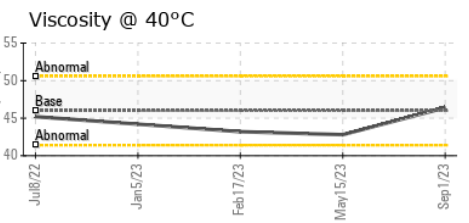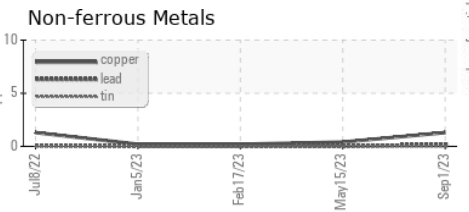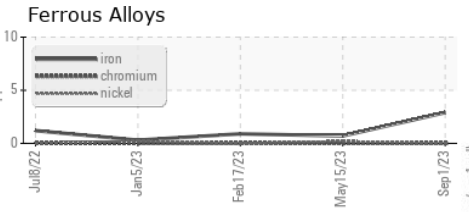

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0741319 **Received** : 05 Oct 2023  
**Lab Number** : 02587155 **Diagnosed** : 06 Oct 2023  
**Unique Number** : 5656221 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**ESCO LTD.**  
 P.O.BOX 270, 185 HOPE STREET SOUTH  
 PORT HOPE, ON  
 CA L1A 3W4  
 Contact: Paul Dundas  
 paul.dundas@mail.weir  
 T: (647)725-8153  
 F: (905)885-7600

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.