

# PROBLEM SUMMARY

Sample Rating Trend

ISO




Area  
**Inland Iron and Metal - 888041**  
 Machine Id  
**AG200**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**



## COMPONENT CONDITION SUMMARY

### Particle Trend

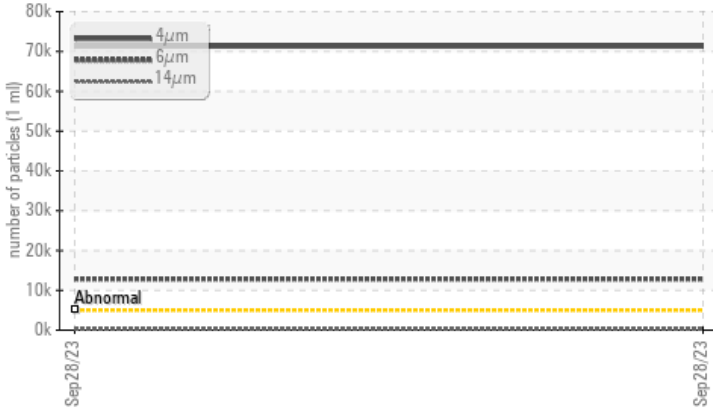

## RECOMMENDATION

This is a baseline read-out on the submitted sample.

## PROBLEMATIC TEST RESULTS

| Sample Status   |              |           | <b>SEVERE</b>   | --- | --- |
|-----------------|--------------|-----------|-----------------|-----|-----|
| Particles >4µm  | ASTM D7647   | >5000     | <b>71267</b>    | --- | --- |
| Particles >6µm  | ASTM D7647   | >1300     | <b>12839</b>    | --- | --- |
| Particles >14µm | ASTM D7647   | >160      | <b>244</b>      | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >19/17/14 | <b>23/21/15</b> | --- | --- |

Customer Id: CHECOB  
 Sample No.: E30000469  
 Lab Number: 02587162  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Tatiana Sorkina +1 (800)263-3939  
[tsorkina@e360s.ca](mailto:tsorkina@e360s.ca)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

RECOMMENDED ACTIONS

*There are no recommended actions for this sample.*

HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area  
**Inland Iron and Metal - 888041**  
 Machine Id  
**AG200**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

### Wear

{not applicable}

### Contamination

Particles >6µm are severely high. Particles >4µm are severely high. Oil Cleanliness are severely high. Particles >14µm are notably high.

### Fluid Condition

{not applicable}

## SAMPLE INFORMATION

|                  | method      | limit/base  | current            | history1 | history2 |
|------------------|-------------|-------------|--------------------|----------|----------|
| Batch #          | Client Info |             | <b>AG200</b>       | ---      | ---      |
| Machine ID       | Client Info |             | <b>Sales</b>       | ---      | ---      |
| Department       | Client Info |             | <b>Machine</b>     | ---      | ---      |
| Sample From      | Client Info |             | <b>Initial</b>     | ---      | ---      |
| Production Stage | Client Info |             | <b>10/04/2023</b>  | ---      | ---      |
| Sample Number    | Client Info |             | <b>E30000469</b>   | ---      | ---      |
| Sample Date      | Client Info |             | <b>28 Sep 2023</b> | ---      | ---      |
| Machine Age      | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Age          | hrs         | Client Info | <b>0</b>           | ---      | ---      |
| Oil Changed      |             | Client Info | <b>N/A</b>         | ---      | ---      |
| Sample Status    |             |             | <b>SEVERE</b>      | ---      | ---      |

## WEAR METALS

|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Iron      | ppm    | ASTM D5185(m) >20 | <b>10</b>    | ---      | ---      |
| Chromium  | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | ---      | ---      |
| Nickel    | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | ---      | ---      |
| Titanium  | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Silver    | ppm    | ASTM D5185(m)     | <b>&lt;1</b> | ---      | ---      |
| Aluminum  | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | ---      | ---      |
| Lead      | ppm    | ASTM D5185(m) >20 | <b>4</b>     | ---      | ---      |
| Copper    | ppm    | ASTM D5185(m) >20 | <b>10</b>    | ---      | ---      |
| Tin       | ppm    | ASTM D5185(m) >20 | <b>0</b>     | ---      | ---      |
| Antimony  | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Vanadium  | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Beryllium | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |
| Cadmium   | ppm    | ASTM D5185(m)     | <b>0</b>     | ---      | ---      |






## ADDITIVES

|            | method | limit/base         | current      | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185(m) 5    | <b>&lt;1</b> | ---      | ---      |
| Barium     | ppm    | ASTM D5185(m) 5    | <b>&lt;1</b> | ---      | ---      |
| Molybdenum | ppm    | ASTM D5185(m) 5    | <b>0</b>     | ---      | ---      |
| Manganese  | ppm    | ASTM D5185(m)      | <b>0</b>     | ---      | ---      |
| Magnesium  | ppm    | ASTM D5185(m) 25   | <b>16</b>    | ---      | ---      |
| Calcium    | ppm    | ASTM D5185(m) 200  | <b>41</b>    | ---      | ---      |
| Phosphorus | ppm    | ASTM D5185(m) 300  | <b>367</b>   | ---      | ---      |
| Zinc       | ppm    | ASTM D5185(m) 370  | <b>413</b>   | ---      | ---      |
| Sulfur     | ppm    | ASTM D5185(m) 2500 | <b>1574</b>  | ---      | ---      |
| Lithium    | ppm    | ASTM D5185(m)      | <b>&lt;1</b> | ---      | ---      |

## CONTAMINANTS

|           | method | limit/base        | current      | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon   | ppm    | ASTM D5185(m) >15 | <b>5</b>     | ---      | ---      |
| Sodium    | ppm    | ASTM D5185(m)     | <b>2</b>     | ---      | ---      |
| Potassium | ppm    | ASTM D5185(m) >20 | <b>&lt;1</b> | ---      | ---      |
| Water     | %      | ASTM D6304* >0.05 | <b>0.001</b> | ---      | ---      |
| ppm Water | ppm    | ASTM D6304* >500  | <b>9.3</b>   | ---      | ---      |

# OIL ANALYSIS REPORT

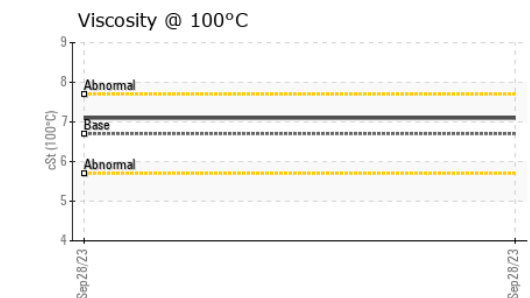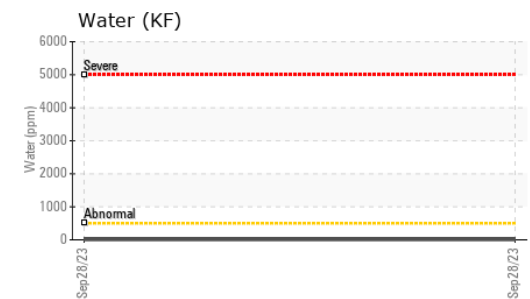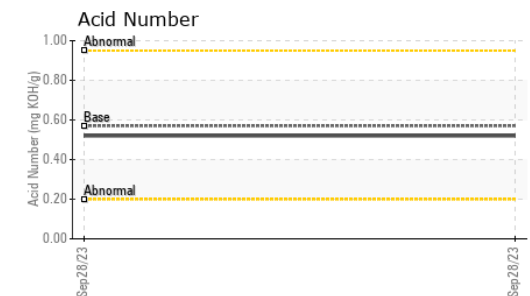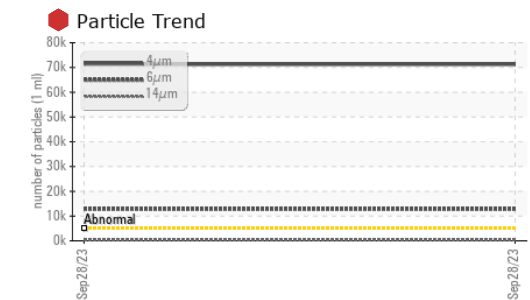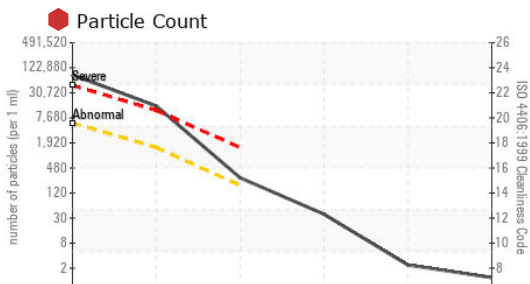

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : E30000469  
**Lab Number** : 02587162  
**Unique Number** : 5656228  
**Test Package** : IND 2 ( Additional Tests: KF, KV100, TAN Man, VI )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**Environmental 360 Solutions Ltd.**  
 640 Victoria Street  
 Cobourg, ON  
 CA K9A 5H5  
 Contact: Fred Kosseim  
 fkosseim@e360s.ca  
 T: (905)372-2251  
 F: (905)372-1658

| FLUID CLEANLINESS | method       | limit/base | current  | history1 | history2 |
|-------------------|--------------|------------|----------|----------|----------|
| Particles >4µm    | ASTM D7647   | >5000      | 71267    | ---      | ---      |
| Particles >6µm    | ASTM D7647   | >1300      | 12839    | ---      | ---      |
| Particles >14µm   | ASTM D7647   | >160       | 244      | ---      | ---      |
| Particles >21µm   | ASTM D7647   | >40        | 33       | ---      | ---      |
| Particles >38µm   | ASTM D7647   | >10        | 2        | ---      | ---      |
| Particles >71µm   | ASTM D7647   | >3         | 1        | ---      | ---      |
| Oil Cleanliness   | ISO 4406 (c) | >19/17/14  | 23/21/15 | ---      | ---      |

| FLUID DEGRADATION | method   | limit/base | current | history1 | history2 |     |
|-------------------|----------|------------|---------|----------|----------|-----|
| Acid Number (AN)  | mg KOH/g | ASTM D974* | 0.57    | 0.52     | ---      | --- |

| VISUAL           | method | limit/base | current | history1 | history2 |     |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal      | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Yellow Metal     | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Precipitate      | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Silt             | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Debris           | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Sand/Dirt        | scalar | Visual*    | NONE    | NONE     | ---      | --- |
| Appearance       | scalar | Visual*    | NORML   | NORML    | ---      | --- |
| Odor             | scalar | Visual*    | NORML   | NORML    | ---      | --- |
| Emulsified Water | scalar | Visual*    | >0.05   | NEG      | ---      | --- |
| Free Water       | scalar | Visual*    |         | NEG      | ---      | --- |

| FLUID PROPERTIES     | method | limit/base    | current | history1 | history2 |     |
|----------------------|--------|---------------|---------|----------|----------|-----|
| Visc @ 40°C          | cSt    | ASTM D7279(m) | 46      | 45.9     | ---      | --- |
| Visc @ 100°C         | cSt    | ASTM D7279(m) | 6.7     | 7.1      | ---      | --- |
| Viscosity Index (VI) | Scale  | ASTM D2270*   | 97      | 113      | ---      | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |          |
|---------------|--------|------------|---------|----------|----------|----------|
| Color         |        |            |         |          | no image | no image |
| Bottom        |        |            |         |          | no image | no image |