




# OIL ANALYSIS REPORT

Sample Rating Trend

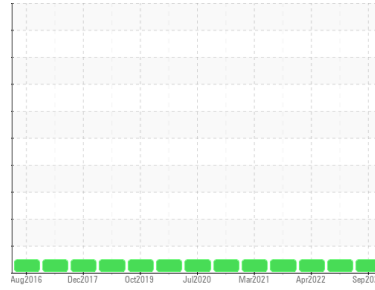

**NORMAL**



Machine Id  
**402 CRANE AUXILIARY TROLLEY GEARBOX (S/N VA0426886)**  
 Component  
**Gearbox**  
 Fluid  
**SHELL OMALA S4 GX 220 (19 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0811789</b>	WC0665417	WC0685488
Sample Date	Client Info		<b>18 Sep 2023</b>	19 Sep 2022	19 Apr 2022
Machine Age	yrs	Client Info	<b>0</b>	0	0
Oil Age	yrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	16	---
Iron	ppm	ASTM D5185(m) >200	<b>4</b>	44	13
Chromium	ppm	ASTM D5185(m) >15	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m) >25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m) >100	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m) >200	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m) >25	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>25</b>	19	21
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	11	<1
Manganese	ppm	ASTM D5185(m)	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	2
Calcium	ppm	ASTM D5185(m)	<b>3</b>	16	5
Phosphorus	ppm	ASTM D5185(m)	<b>406</b>	461	453
Zinc	ppm	ASTM D5185(m)	<b>5</b>	6	5
Sulfur	ppm	ASTM D5185(m)	<b>4844</b>	5574	5032
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>12</b>	16	8
Sodium	ppm	ASTM D5185(m)	<b>2</b>	2	2
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	2	3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	<b>1.00</b>	0.77	---




# OIL ANALYSIS REPORT

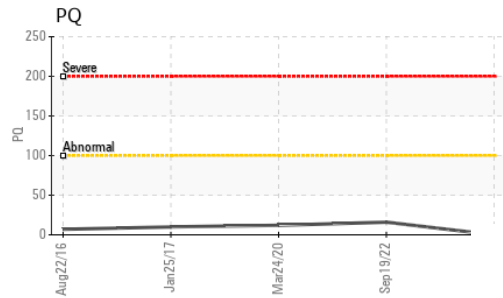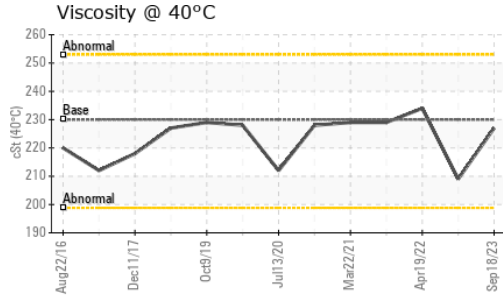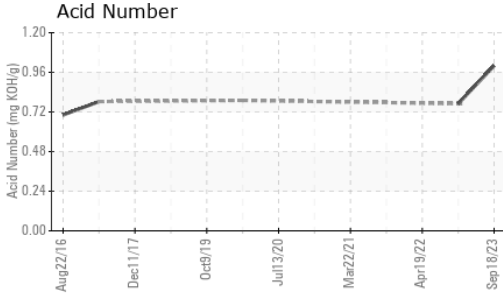






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>LIGHT</b>	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	230	<b>227</b>	209

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

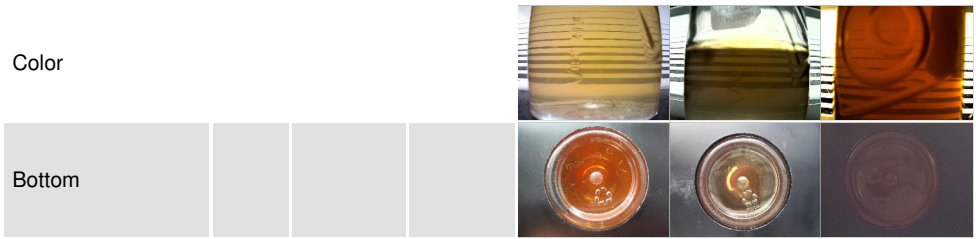

## GRAPHS

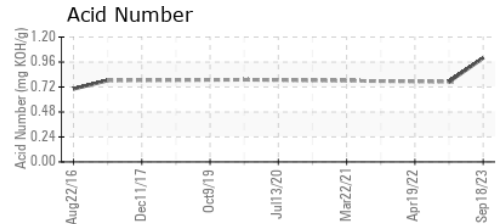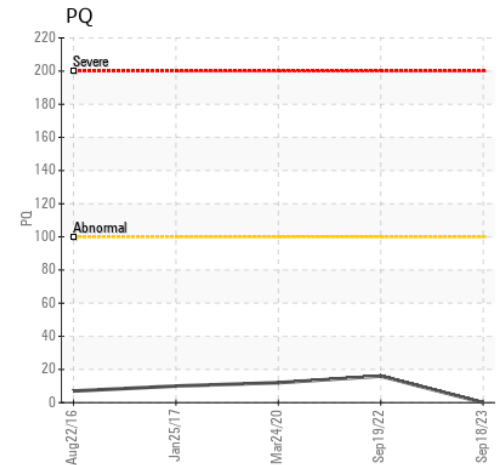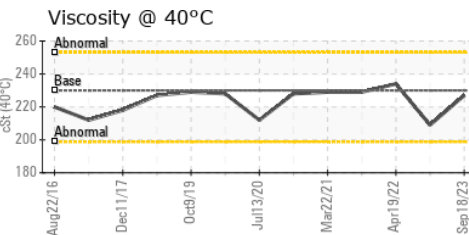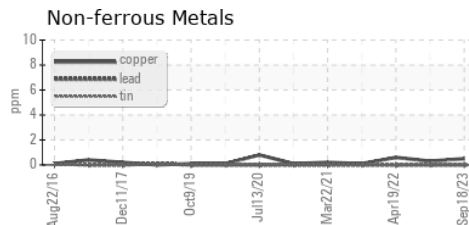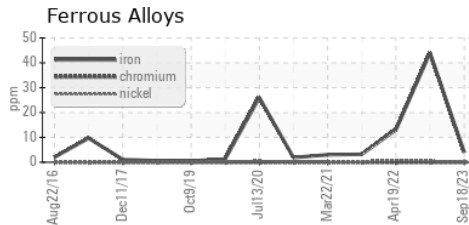

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0811789 **Received** : 05 Oct 2023  
**Lab Number** : **02587332** **Diagnosed** : 06 Oct 2023  
**Unique Number** : 5656398 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**Vale - Copper Cliff Smelter**  
 COPPER CLIFF SMELTER WAREHOUSE, 155 BALSAM ST.  
 COPPER CLIFF, ON  
 CA P0M 1N0  
 Contact: Andy Kozachanko  
 andrew.kozachanko@vale.com  
 T: (705)682-6687  
 F: (705)682-6939

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.