



OIL ANALYSIS REPORT


Sample Rating Trend

NORMAL



Area
CLARKE & SONS FISHING LTD.
Machine Id
FISHING VESSEL MV JOYFUL SOUND

Component
3 Genset
Fluid
SHELL ROTELLA T 15W40 (40 LTR)

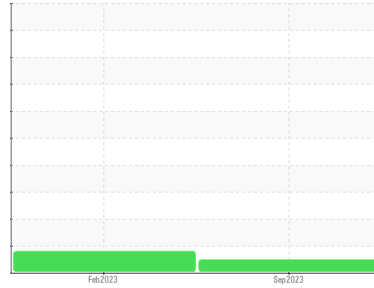

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			OF0000290	OF0000948	---
Sample Date	Client Info			23 Sep 2023	21 Feb 2023	---
Machine Age	hrs	Client Info		10444	7378	---
Oil Age	hrs	Client Info		632	24	---
Oil Changed	Client Info			Changed	Not Changd	---
Sample Status				NORMAL	MARGINAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0	0	---
Iron	ppm	ASTM D5185(m)	>80	1	2	---
Chromium	ppm	ASTM D5185(m)	>6	0	0	---
Nickel	ppm	ASTM D5185(m)	>2	0	0	---
Titanium	ppm	ASTM D5185(m)	>2	0	0	---
Silver	ppm	ASTM D5185(m)	>2	<1	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	2	2	---
Lead	ppm	ASTM D5185(m)	>95	<1	<1	---
Copper	ppm	ASTM D5185(m)	>85	<1	2	---
Tin	ppm	ASTM D5185(m)	>9	0	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	35	51	71	---
Barium	ppm	ASTM D5185(m)	0	<1	0	---
Molybdenum	ppm	ASTM D5185(m)	0	79	75	---
Manganese	ppm	ASTM D5185(m)	0	0	0	---
Magnesium	ppm	ASTM D5185(m)	10	82	13	---
Calcium	ppm	ASTM D5185(m)	2340	2095	2012	---
Phosphorus	ppm	ASTM D5185(m)	1110	1035	947	---
Zinc	ppm	ASTM D5185(m)	1210	1185	1077	---
Sulfur	ppm	ASTM D5185(m)	3890	3145	2895	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	11	---
Sodium	ppm	ASTM D5185(m)		1	3	---
Potassium	ppm	ASTM D5185(m)	>20	0	0	---
Fuel	%	ASTM D7593*	>4.0	0.9	▲ 3.8	---


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	0	---
Nitration	Abs/cm	ASTM D7624*	>20	7.9	7.2	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.1	16.8	---




OIL ANALYSIS REPORT

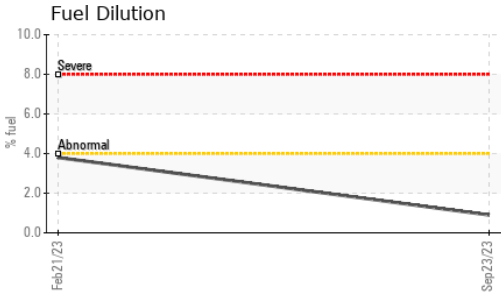

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	12.7	11.8	---
Base Number (BN)	mg KOH/g	ASTM D2896*	10.1	7.72	7.77	---









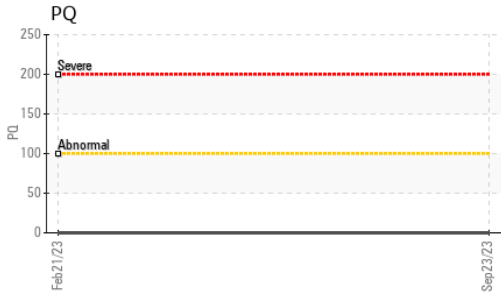


VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

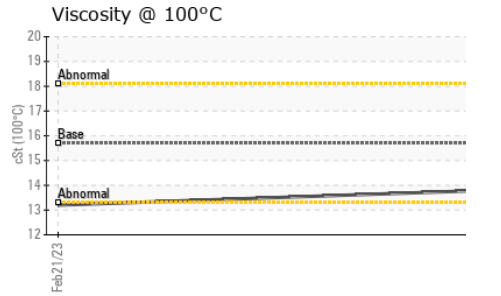

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	15.7	13.8	13.2	---

GRAPHS

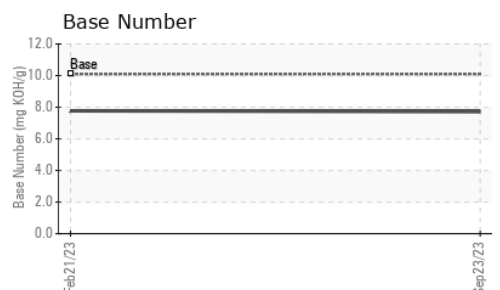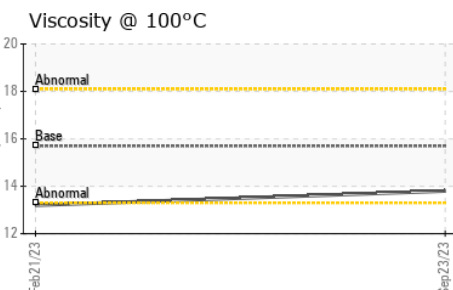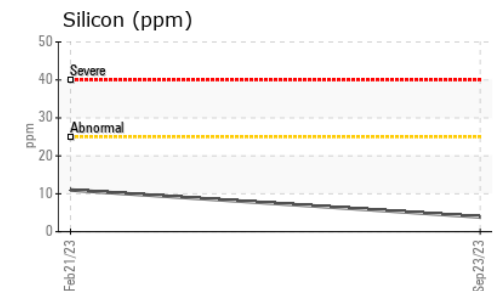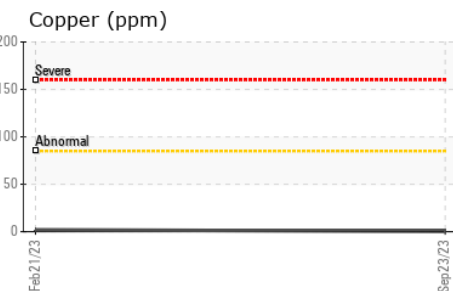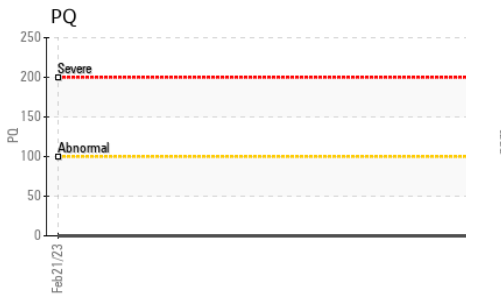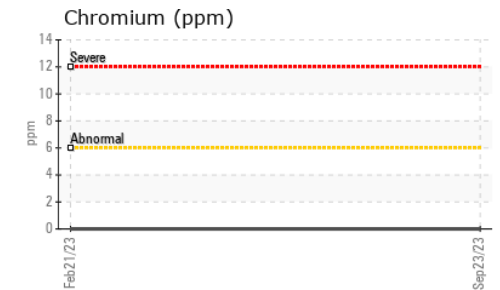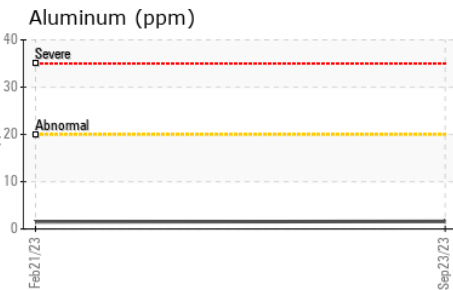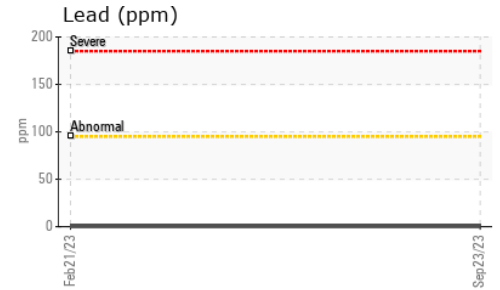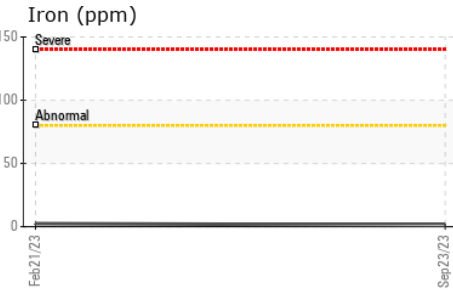

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : OF0000290 **Received** : 06 Oct 2023
Lab Number : **02587420** **Diagnosed** : 16 Oct 2023
Unique Number : 5656486 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: FUELDILUTION, PercentFuel, PQ)

Oil Filtration Solutions Ltd.
 PO BOX 16125
 CONCEPTION BAY SOUTH, NL
 CA A1X 2E2
 Contact: BILL BUTLER
 BBUTLER@OILFILTRATIONSOLUTIONS.COM
 T: (709)834-8433
 F: (709)834-8435

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.