


OIL ANALYSIS REPORT

Sample Rating Trend



FUEL

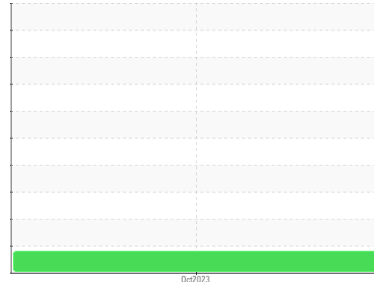

Machine Id
KUBOTA WG972 4MK4185

Component
Gasoline Engine
Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

▲ Recommendation

Aucune mesure corrective n'est recommandée pour l'instant. Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Veuillez préciser la marque, le type et la viscosité de l'huile lors de votre prochain échantillon.

Wear

Les taux d'usure de tous les composants sont normaux.

▲ Contamination

Légère dilution de carburant dans l'huile. Aucun autre contaminant n'a été détecté dans l'huile.

Fluid Condition

Le résultat pour le BN indique que la réserve d'alcalinité est acceptable pour l'huile. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WA0019425	---	---
Sample Date	Client Info			02 Oct 2023	---	---
Machine Age	hrs	Client Info		721	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			Not Chngd	---	---
Sample Status				MARGINAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	---	---




WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>150	5	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>40	1	---	---
Lead	ppm	ASTM D5185(m)	>50	<1	---	---
Copper	ppm	ASTM D5185(m)	>155	3	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		35	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		54	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		944	---	---
Calcium	ppm	ASTM D5185(m)		843	---	---
Phosphorus	ppm	ASTM D5185(m)		939	---	---
Zinc	ppm	ASTM D5185(m)		1113	---	---
Sulfur	ppm	ASTM D5185(m)		2484	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>30	4	---	---
Sodium	ppm	ASTM D5185(m)	>400	14	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Fuel	%	ASTM D7593*	>4.0	▲ 2.3	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	10.1	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	21.7	---	---

OIL ANALYSIS REPORT






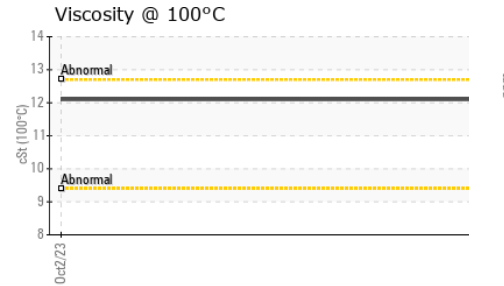
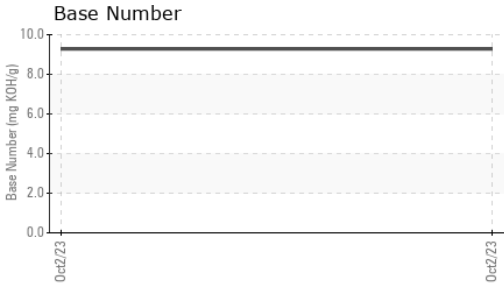
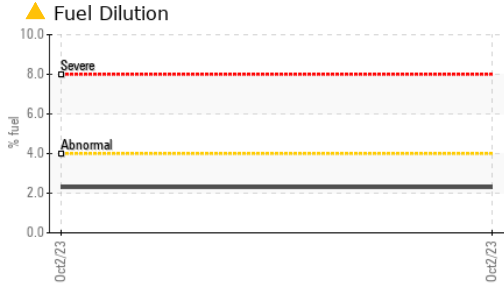


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	19.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		9.28	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)		12.1	---	---

GRAPHS

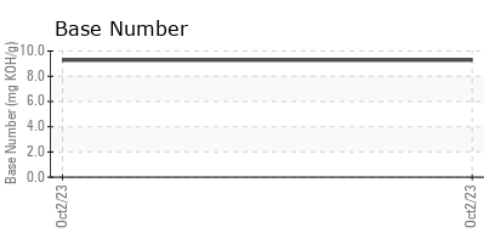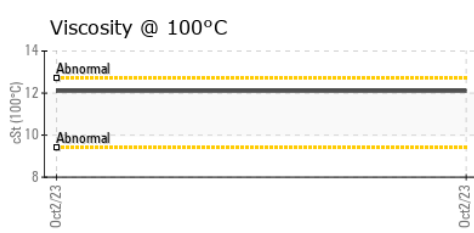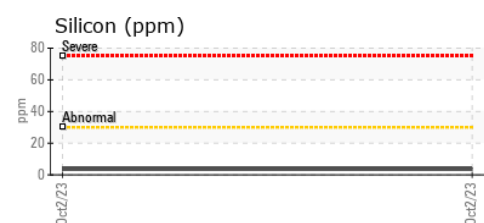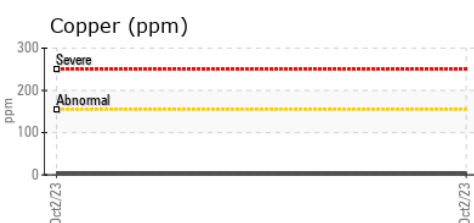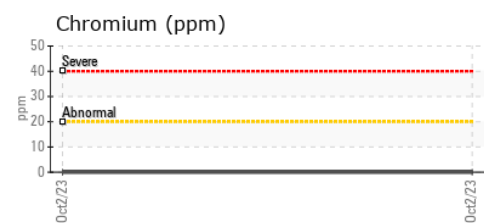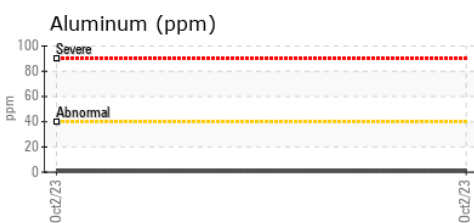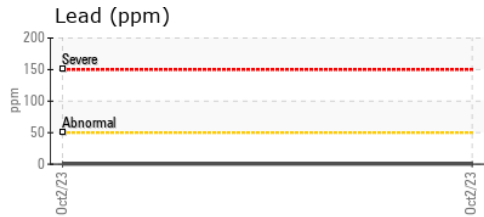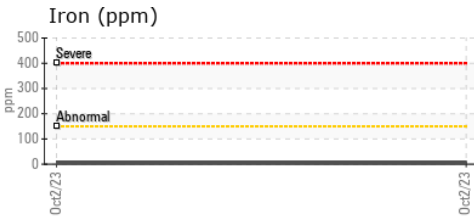

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0019425 **Received** : 06 Oct 2023
Lab Number : 02587567 **Diagnosed** : 10 Oct 2023
Unique Number : 5656633 **Diagnostician** : Kevin Marson
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

Wajax Power Systems
 2997 AV. WATT
 Quebec, QC
 CA G1X 3W1
 Contact: Joe Di Pede
 jdipede@wajax.com
 T: (418)651-5371
 F: (418)651-4448

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.