




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

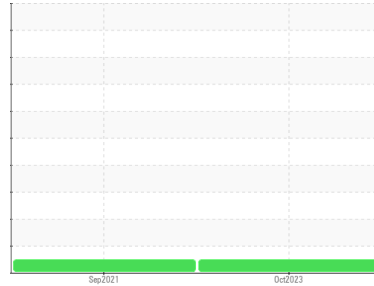

Area
(C-FGRI)
Machine Id
CESSNA RL-20567-27A
Component
Piston Aircraft Engine
Fluid
PHILLIPS 66 AVIATION X/C OIL SAE20W50 (8 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants

There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0723828	WC0579594	---
Sample Date	Client Info		04 Oct 2023	21 Sep 2021	---
TSN	hrs	Client Info	15029	14701	---
TSO	hrs	Client Info	5742	539	---
Oil Age	hrs	Client Info	48	38	---
Oil Changed		Client Info	Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>90	20	11	---
Chromium	ppm	ASTM D5185(m)	>20	6	3	---
Nickel	ppm	ASTM D5185(m)	>15	5	2	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>5	<1	0	---
Aluminum	ppm	ASTM D5185(m)	>25	4	1	---
Lead	ppm	ASTM D5185(m)	>20000	4226	3161	---
Copper	ppm	ASTM D5185(m)	>25	3	2	---
Tin	ppm	ASTM D5185(m)	>30	0	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		<1	<1	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<1	<1	---
Barium	ppm	ASTM D5185(m)		0	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)		0	0	---
Calcium	ppm	ASTM D5185(m)		2	<1	---
Phosphorus	ppm	ASTM D5185(m)		1217	1	---
Zinc	ppm	ASTM D5185(m)		3	1	---
Sulfur	ppm	ASTM D5185(m)		1041	970	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	4	4	---
Sodium	ppm	ASTM D5185(m)		<1	<1	---
Potassium	ppm	ASTM D5185(m)	>20	0	<1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.15	0.59	0.45	---







OIL ANALYSIS REPORT

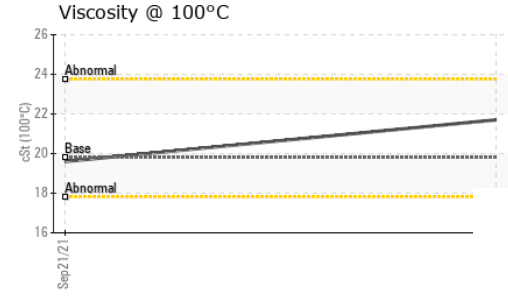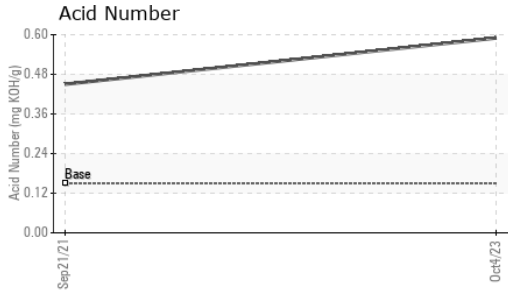

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	VLITE	VLITE
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	19.8	21.7	19.6

GRAPHS

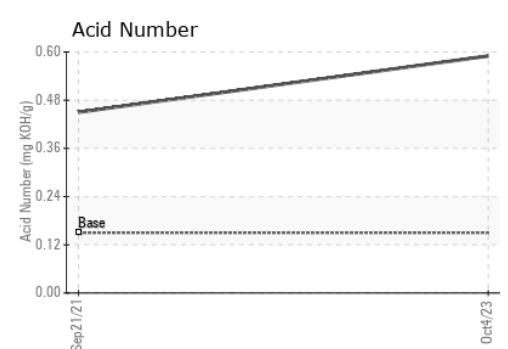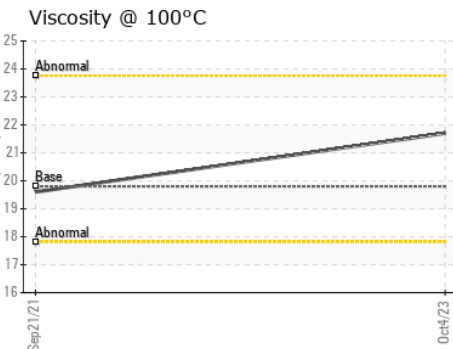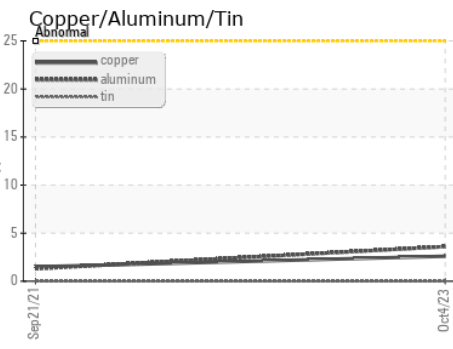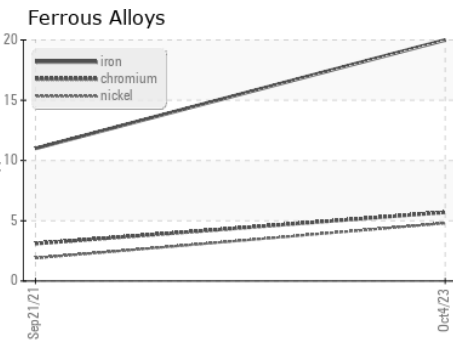

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0723828
Lab Number : 02587569
Unique Number : 5656635
Test Package : AVI 3




FLITELINE MAINTENANCE
 4C-4881 FOUNTAIN ST. N, HANGAR 33
 BRESLAU, ON
 CA N0B 1M0
 Contact: Michael Koteles
 mike@fliteline.ca
 T: (519)648-3404
 F: (519)648-3040

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.



FERROGRAPHY REPORT

Area
(C-FGRI)
 Machine Id
CESSNA RL-20567-27A
 Component
Piston Aircraft Engine
 Fluid
PHILLIPS 66 AVIATION X/C OIL SAE20W50 (8 LTR)

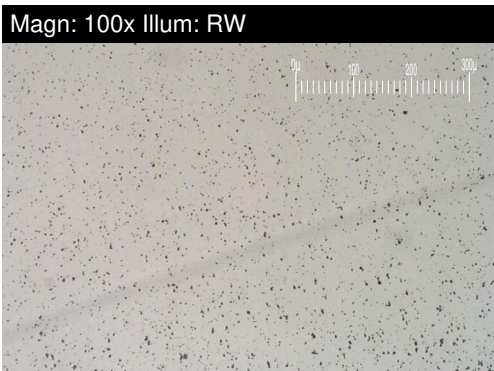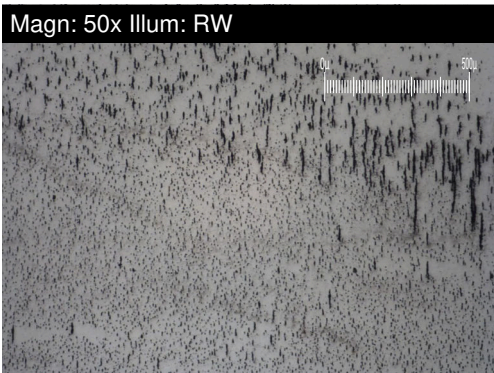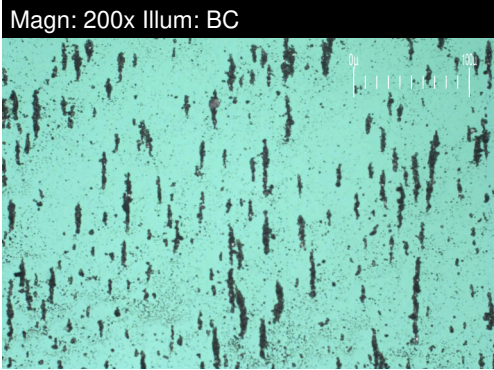


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		7.5	67.1	---
Small Particles		DR-Ferr*		6.1	36.5	---
Total Particles		DR-Ferr*	>---	13.6	103.6	---
Large Particles Percentage	%	DR-Ferr*		10.3	29.5	---
Severity Index		DR-Ferr*		11	2053	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		4	3	
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		2	1	
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*		1	1	
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		1	1	
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		2	2	

WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

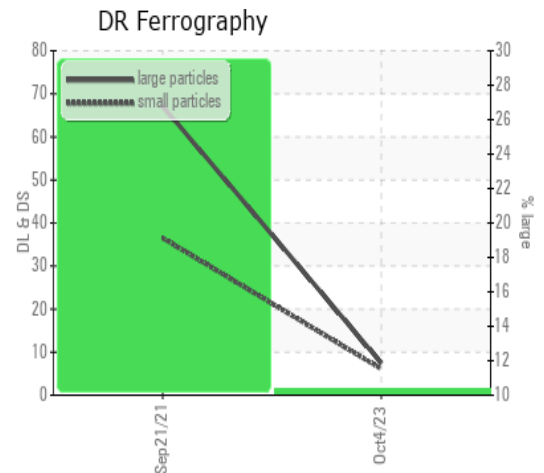

This page left intentionally blank