




# OIL ANALYSIS REPORT

Sample Rating Trend

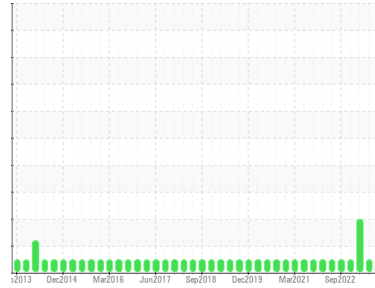

**NORMAL**



Area  
**8 Printer**  
 Machine Id  
**68-0239 Doctor Blade**  
 Component  
**Hydraulic System**  
 Fluid  
**SUNOCO SUNVIS 846 ISO 46 (104 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1    | history2    |
|---------------|-----------------|--------------------|-------------|-------------|
| Sample Number | Client Info     | <b>WC0837262</b>   | WC0808297   | WC0782390   |
| Sample Date   | Client Info     | <b>03 Oct 2023</b> | 06 Jul 2023 | 29 Mar 2023 |
| Machine Age   | hrs Client Info | <b>0</b>           | 0           | 0           |
| Oil Age       | hrs Client Info | <b>0</b>           | 0           | 0           |
| Oil Changed   | Client Info     | <b>N/A</b>         | N/A         | N/A         |
| Sample Status |                 | <b>NORMAL</b>      | NORMAL      | ABNORMAL    |

## WEAR METALS

| method        | limit/base        | current      | history1 | history2 |
|---------------|-------------------|--------------|----------|----------|
| Iron ppm      | ASTM D5185(m) >30 | <b>0</b>     | 0        | <1       |
| Chromium ppm  | ASTM D5185(m) >2  | <b>0</b>     | 0        | 0        |
| Nickel ppm    | ASTM D5185(m) >2  | <b>0</b>     | 0        | <1       |
| Titanium ppm  | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Silver ppm    | ASTM D5185(m)     | <b>&lt;1</b> | <1       | 0        |
| Aluminum ppm  | ASTM D5185(m) >2  | <b>&lt;1</b> | 0        | 0        |
| Lead ppm      | ASTM D5185(m) >10 | <b>&lt;1</b> | <1       | 0        |
| Copper ppm    | ASTM D5185(m) >25 | <b>&lt;1</b> | <1       | 0        |
| Tin ppm       | ASTM D5185(m) >20 | <b>0</b>     | 0        | 0        |
| Antimony ppm  | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Vanadium ppm  | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Beryllium ppm | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Cadmium ppm   | ASTM D5185(m)     | <b>0</b>     | <1       | 0        |

## ADDITIVES

| method         | limit/base    | current      | history1 | history2 |
|----------------|---------------|--------------|----------|----------|
| Boron ppm      | ASTM D5185(m) | <b>&lt;1</b> | <1       | <1       |
| Barium ppm     | ASTM D5185(m) | <b>&lt;1</b> | 0        | 0        |
| Molybdenum ppm | ASTM D5185(m) | <b>0</b>     | <1       | <1       |
| Manganese ppm  | ASTM D5185(m) | <b>0</b>     | 0        | 0        |
| Magnesium ppm  | ASTM D5185(m) | <b>1</b>     | 2        | 2        |
| Calcium ppm    | ASTM D5185(m) | <b>39</b>    | 40       | 42       |
| Phosphorus ppm | ASTM D5185(m) | <b>254</b>   | 273      | 272      |
| Zinc ppm       | ASTM D5185(m) | <b>312</b>   | 322      | 306      |
| Sulfur ppm     | ASTM D5185(m) | <b>5567</b>  | 5709     | 5620     |
| Lithium ppm    | ASTM D5185(m) | <b>&lt;1</b> | <1       | <1       |

## CONTAMINANTS

| method        | limit/base        | current      | history1 | history2 |
|---------------|-------------------|--------------|----------|----------|
| Silicon ppm   | ASTM D5185(m) >25 | <b>&lt;1</b> | <1       | <1       |
| Sodium ppm    | ASTM D5185(m)     | <b>0</b>     | 0        | 0        |
| Potassium ppm | ASTM D5185(m) >20 | <b>0</b>     | <1       | 0        |

## FLUID CLEANLINESS





| method          | limit/base             | current         | history1 | history2   |
|-----------------|------------------------|-----------------|----------|------------|
| Particles >4µm  | ASTM D7647 >5000       | <b>954</b>      | 2220     | ▲ 9655     |
| Particles >6µm  | ASTM D7647 >1300       | <b>275</b>      | 767      | ▲ 4014     |
| Particles >14µm | ASTM D7647 >160        | <b>19</b>       | 97       | ▲ 467      |
| Particles >21µm | ASTM D7647 >40         | <b>5</b>        | 31       | ▲ 103      |
| Particles >38µm | ASTM D7647 >10         | <b>0</b>        | 1        | 1          |
| Particles >71µm | ASTM D7647 >3          | <b>0</b>        | 0        | 0          |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 | <b>17/15/11</b> | 18/17/14 | ▲ 20/19/16 |

## FLUID DEGRADATION

| method                    | limit/base | current     | history1 | history2 |
|---------------------------|------------|-------------|----------|----------|
| Acid Number (AN) mg KOH/g | ASTM D974* | <b>0.27</b> | 0.28     | 0.29     |




# OIL ANALYSIS REPORT

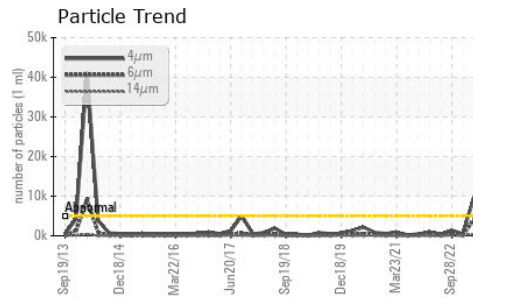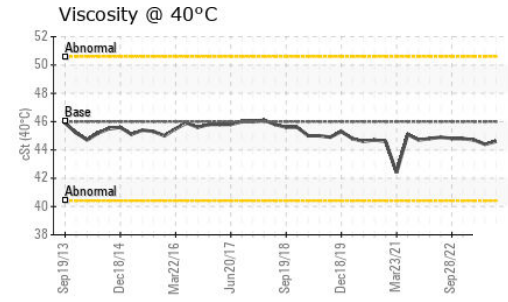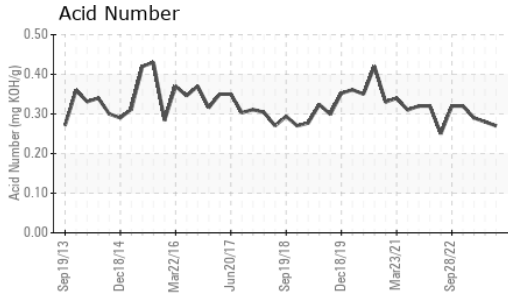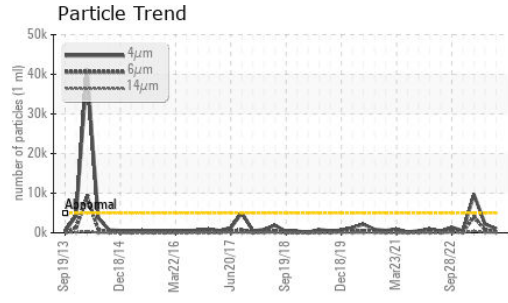






| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | Visual*    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | Visual*    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | Visual*    | NONE    | NONE     | NONE     |
| Silt             | scalar | Visual*    | NONE    | NONE     | NONE     |
| Debris           | scalar | Visual*    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | Visual*    | NONE    | NONE     | NONE     |
| Appearance       | scalar | Visual*    | NORML   | NORML    | NORML    |
| Odor             | scalar | Visual*    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | Visual*    | >0.05   | NEG      | NEG      |
| Free Water       | scalar | Visual*    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base    | current | history1 | history2 |
|------------------|--------|---------------|---------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D7279(m) | 46.0    | 44.6     | 44.7     |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

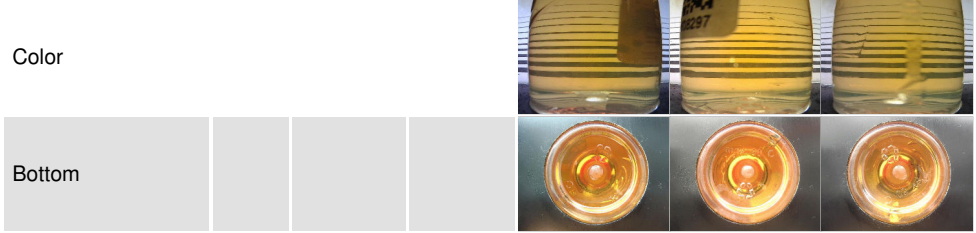

## GRAPHS

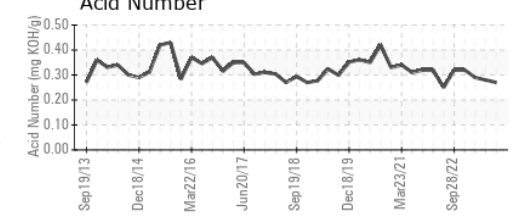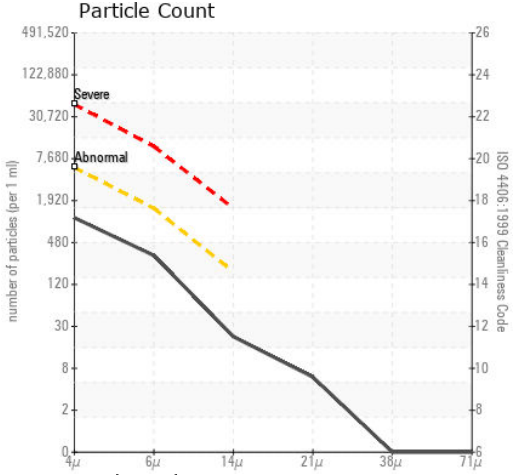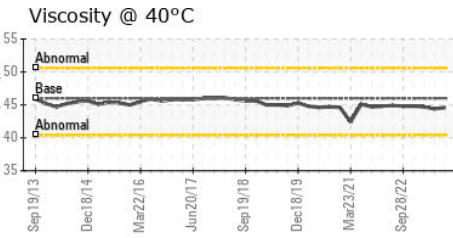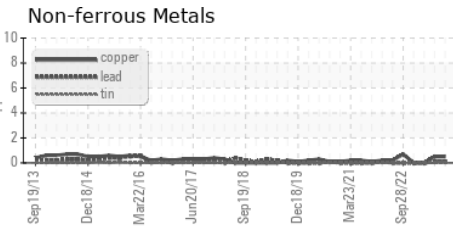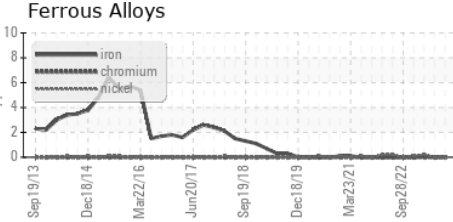

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **CANADIAN GENERAL TOWER LTD.**  
**Sample No.** : WC0837262 **Received** : 06 Oct 2023 52 MIDDLETON STREET, P.O. BOX 160  
**Lab Number** : 02587604 **Diagnosed** : 10 Oct 2023 CAMBRIDGE, ON  
**Unique Number** : 5656670 **Diagnostician** : Wes Davis CA N1S 2R4  
**Test Package** : IND 2

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.