




# PROBLEM SUMMARY

Sample Rating Trend

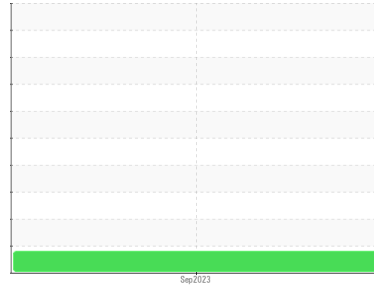


FUEL



Machine Id  
**MAIN ENGINE**  
 Component  
**Port Main Engine**  
 Fluid  
**SAE 15W40 (--- GAL)**

## COMPONENT CONDITION SUMMARY

### ▲ Fuel Dilution

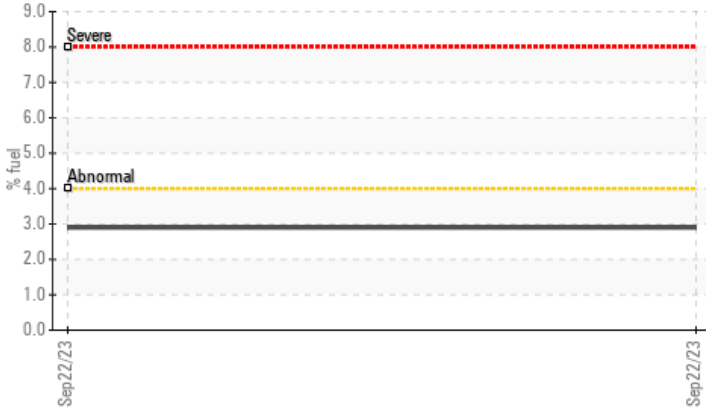

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## PROBLEMATIC TEST RESULTS

Sample Status		MARGINAL		---	---
Fuel	%	ASTM D7593*	>4.0	▲ 2.9	---

Customer Id: CARIBOUIS  
 Sample No.: WC0754187  
 Lab Number: 02587725  
 Test Package: MAR 1



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Information Required	---	---	?	Please specify the brand, type, and viscosity of the oil on your next sample. Please specify the component make and model with your next sample.

## HISTORICAL DIAGNOSIS



# OIL ANALYSIS REPORT

Sample Rating Trend



FUEL



Machine Id  
**MAIN ENGINE**  
 Component  
**Port Main Engine**  
 Fluid  
**SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0754187</b>	---	---
Sample Date	Client Info	<b>22 Sep 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---
Oil Age	hrs	Client Info	<b>0</b>	---
Oil Changed	Client Info	<b>Not Chngd</b>	---	---
Sample Status		<b>MARGINAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >75	<b>4</b>	---
Chromium	ppm	ASTM D5185(m) >8	<b>0</b>	---
Nickel	ppm	ASTM D5185(m) >2	<b>0</b>	---
Titanium	ppm	ASTM D5185(m) >3	<b>0</b>	---
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---
Aluminum	ppm	ASTM D5185(m) >15	<b>&lt;1</b>	---
Lead	ppm	ASTM D5185(m) >18	<b>&lt;1</b>	---
Copper	ppm	ASTM D5185(m) >80	<b>2</b>	---
Tin	ppm	ASTM D5185(m) >14	<b>0</b>	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>163</b>	---
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---
Magnesium	ppm	ASTM D5185(m)	<b>11</b>	---
Calcium	ppm	ASTM D5185(m)	<b>2155</b>	---
Phosphorus	ppm	ASTM D5185(m)	<b>961</b>	---
Zinc	ppm	ASTM D5185(m)	<b>1090</b>	---
Sulfur	ppm	ASTM D5185(m)	<b>2888</b>	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >20	<b>2</b>	---
Sodium	ppm	ASTM D5185(m) >57	<b>2</b>	---
Potassium	ppm	ASTM D5185(m) >20	<b>5</b>	---
Fuel	%	ASTM D7593* >4.0	<b>▲ 2.9</b>	---

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	<b>0</b>	---
Nitration	Abs/cm	ASTM D7624* >20	<b>6.0</b>	---
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>21.3</b>	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414* >25	<b>18.9</b>	---






# OIL ANALYSIS REPORT

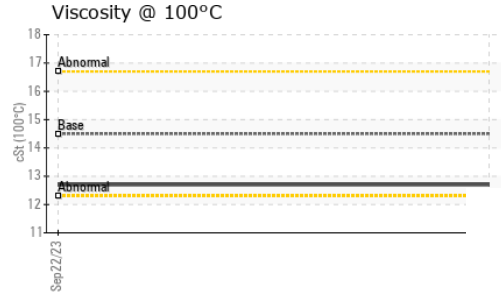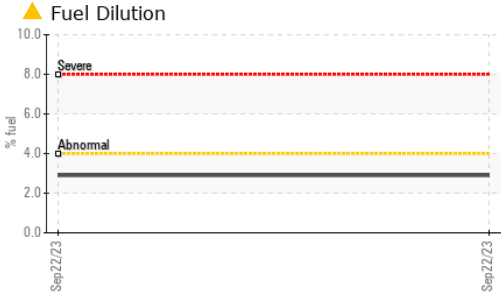

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	<b>12.7</b>	---	---

## GRAPHS

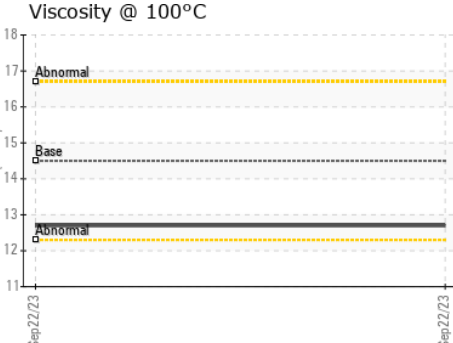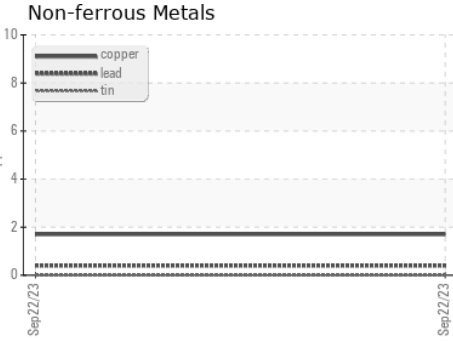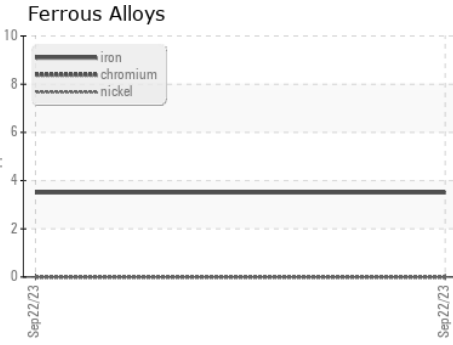

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0754187  
**Lab Number** : **02587725**  
**Unique Number** : 5656791  
**Test Package** : MAR 1 ( Additional Tests: FuelDilution, PercentFuel )

**CANADIAN COAST GUARD**  
 CCGS CARIBOUS ISLE, 867 Lakeshore Rd  
 Burlington, ON  
 CA L7S 1A1  
 Contact: James Heath  
 coastguardjames@hotmail.com  
 T: (613)340-7269  
 F: (705)942-5739

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.