




# OIL ANALYSIS REPORT

Sample Rating Trend

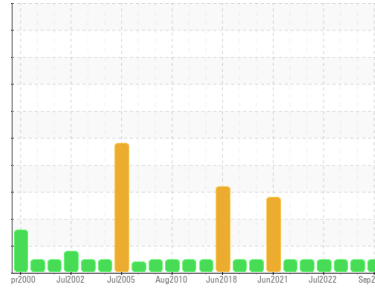

**NORMAL**



Machine Id  
**PH437.010.11 HAWSER WINCH MOTOR STBD (S/N 4697378)**

Component  
**Starboard Winch**

Fluid  
**PETRO CANADA SUPER GEAR FLUID EP 220 (4 LTR)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

### Contaminants

There is no indication of any contamination in the oil.

### Oil Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0797082</b>	WC0797092	WC0671101
Sample Date	Client Info		<b>17 Sep 2023</b>	23 Mar 2023	02 Jan 2023
Machine Age	mths	Client Info	<b>0</b>	0	0
Oil Age	mths	Client Info	<b>0</b>	3	6
Oil Changed	Client Info		<b>Not Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	0	---
Iron	ppm	ASTM D5185(m) >30	<b>3</b>	0	12
Chromium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m) >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m) >5	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m) >70	<b>0</b>	<1	0
Copper	ppm	ASTM D5185(m) >65	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185(m) >9	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>64</b>	67	64
Barium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	0	0
Calcium	ppm	ASTM D5185(m)	<b>2</b>	0	3
Phosphorus	ppm	ASTM D5185(m) 400	<b>256</b>	274	274
Zinc	ppm	ASTM D5185(m)	<b>13</b>	1	13
Sulfur	ppm	ASTM D5185(m) 340	<b>10821</b>	11182	10676
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	<1

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >30	<b>1</b>	1	3
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	0	0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.38	<b>0.45</b>	0.43	---




# OIL ANALYSIS REPORT

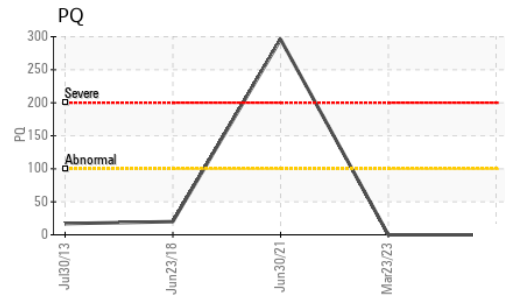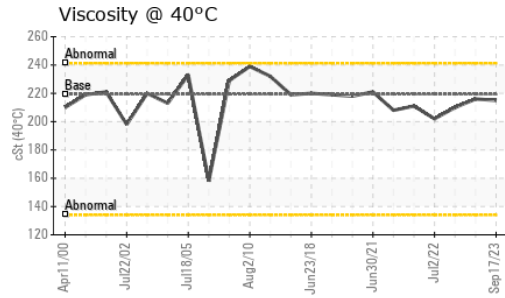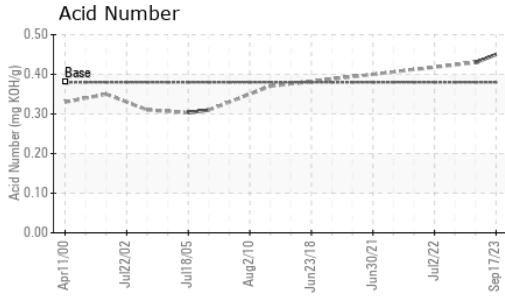






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	219.3	215	216

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

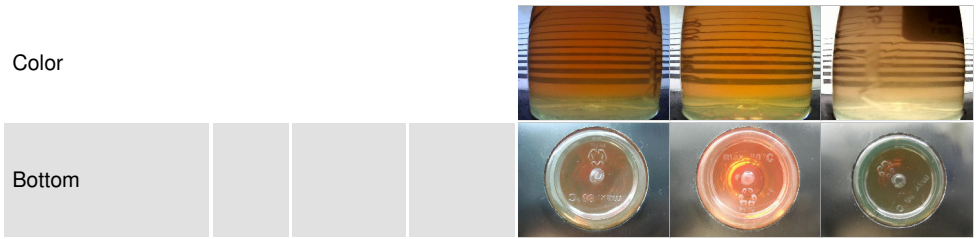

## GRAPHS

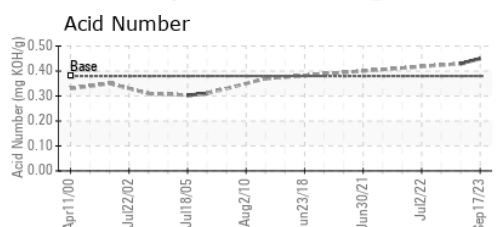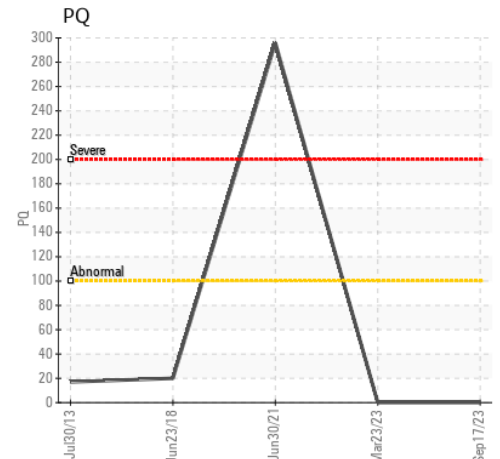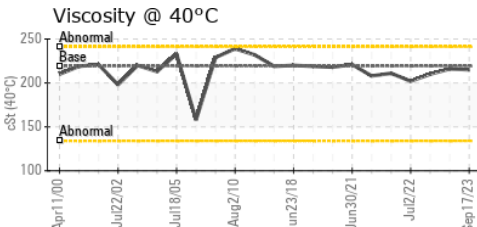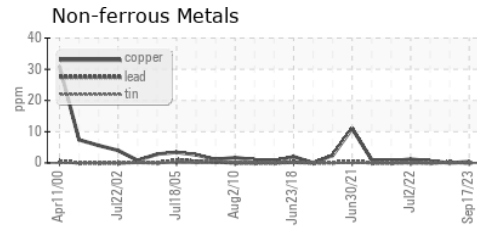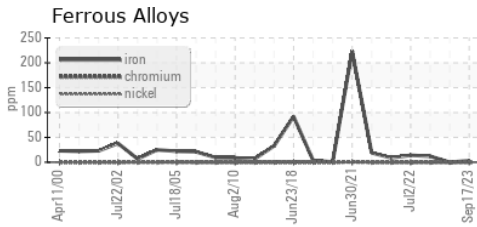




**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0797082  
**Lab Number** : 02587809  
**Unique Number** : 5656875  
**Test Package** : MAR 3 ( Additional Tests: TAN Man )

**CANSHIP UGLAND LTD.**  
 PLACENTIA HOPE, P.O. BOX 8274, STN. A  
 ST. JOHN'S, NL  
 CA A1B 3N4  
 Contact: Brian Bishop  
 bbishop@canship.com  
 T: (709)782-7341  
 F: (709)782-0225

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

# FERROGRAPHY REPORT

Machine Id  
**PH437.010.11 HAWSER WINCH MOTOR STBD (S/N 4697378)**  
 Component  
**Starboard Winch**  
 Fluid  
**PETRO CANADA SUPER GEAR FLUID EP 220 (4 LTR)**

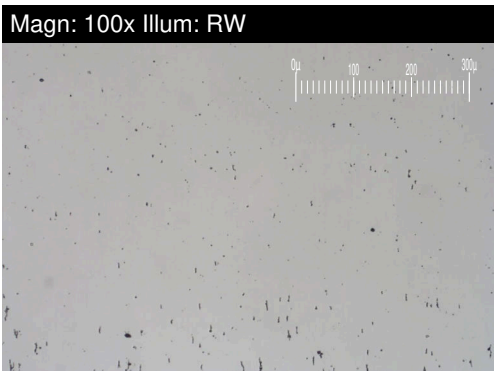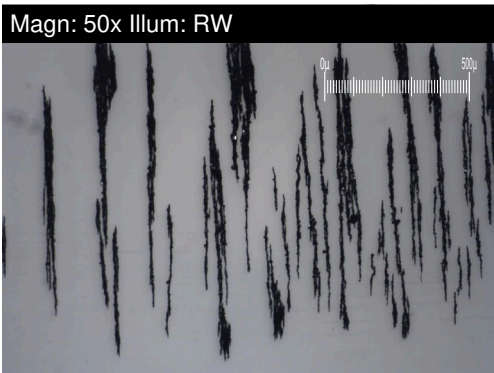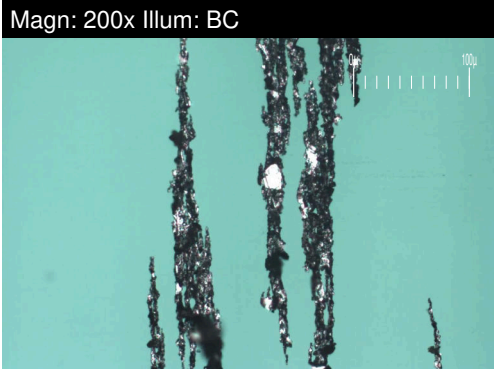


DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		<b>9.1</b>	1.2	---
Small Particles		DR-Ferr*		<b>8.3</b>	0.4	---
Total Particles		DR-Ferr*	>---	<b>17.4</b>	1.6	---
Large Particles Percentage	%	DR-Ferr*		<b>4.6</b>	50	---
Severity Index		DR-Ferr*		<b>7</b>	1	---

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		<b>4</b>	1	
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		<b>2</b>		
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*		<b>1</b>		
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		<b>1</b>	1	
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		<b>2</b>	1	

### WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

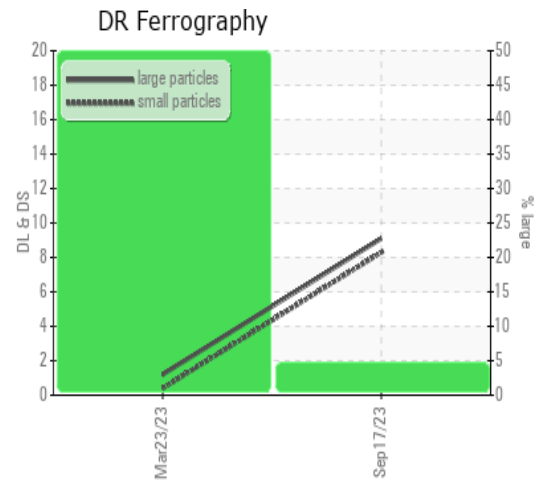

*This page left intentionally blank*