




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

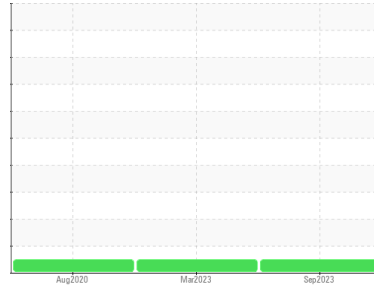

Machine Id
PH814.060.01 (S/N 88256)

Component
Starboard Gearbox

Fluid
PETRO CANADA ULTIMA EP 68 (40 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants

There is no indication of any contamination in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0797081 | WC0671100 | WC0442969 |
| Sample Date | Client Info | | 17 Sep 2023 | 23 Mar 2023 | 06 Aug 2020 |
| Machine Age | hrs | Client Info | 38502 | 37889 | 33330 |
| Oil Age | hrs | Client Info | 0 | 0 | 0 |
| Oil Changed | Client Info | | Not Changed | Changed | Not Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|-------------|--------------------|--------------|----------|----------|
| PQ | ASTM D8184* | | 0 | --- | --- |
| Iron | ppm | ASTM D5185(m) >150 | <1 | <1 | 0 |
| Chromium | ppm | ASTM D5185(m) >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >10 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | <1 | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) >5 | 0 | <1 | 0 |
| Lead | ppm | ASTM D5185(m) >65 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185(m) >80 | 2 | 2 | <1 |
| Tin | ppm | ASTM D5185(m) >8 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185(m) >5 | 0 | <1 | <1 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 69 | 66 | 67 | 63 |
| Barium | ppm | ASTM D5185(m) | <1 | 0 | <1 |
| Molybdenum | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185(m) 0 | <1 | <1 | 1 |
| Calcium | ppm | ASTM D5185(m) 0 | 2 | 0 | 2 |
| Phosphorus | ppm | ASTM D5185(m) 246 | 282 | 302 | 263 |
| Zinc | ppm | ASTM D5185(m) | 7 | 4 | 4 |
| Sulfur | ppm | ASTM D5185(m) 3670 | 4536 | 4568 | 4673 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS



| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >20 | <1 | 1 | <1 |
| Sodium | ppm | ASTM D5185(m) | 1 | <1 | 0 |
| Potassium | ppm | ASTM D5185(m) >20 | 0 | 0 | 1 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* 0.4 | 0.51 | --- | --- |




OIL ANALYSIS REPORT

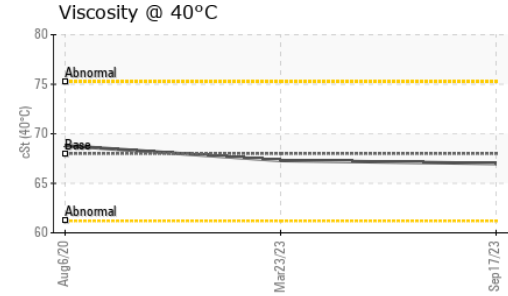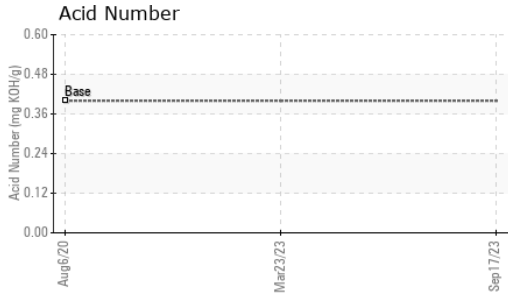






| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-------|
| White Metal | scalar | Visual* | NONE | NONE | VLITE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | VLITE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | VLITE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|---------------|---------|-------------|----------|------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 68.0 | 67.0 | 67.3 | 68.8 |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

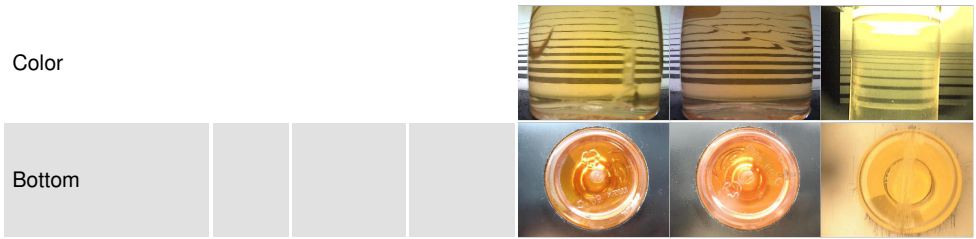

GRAPHS

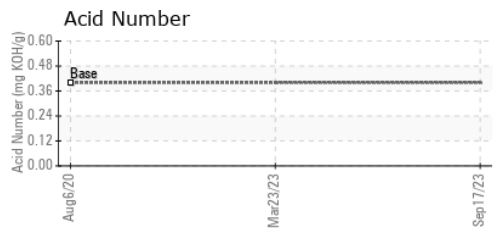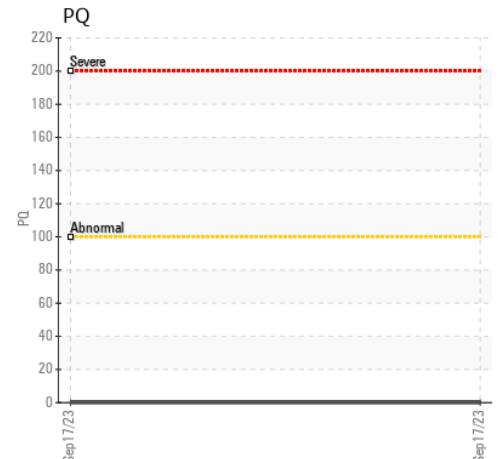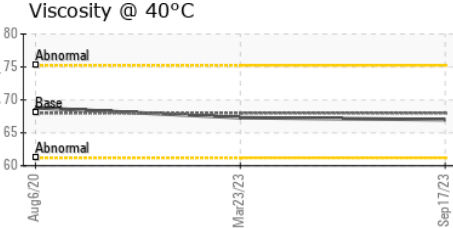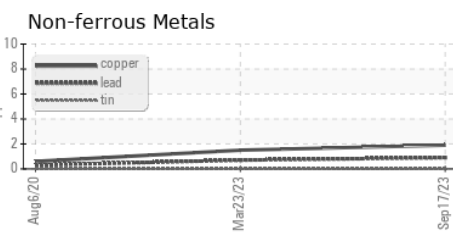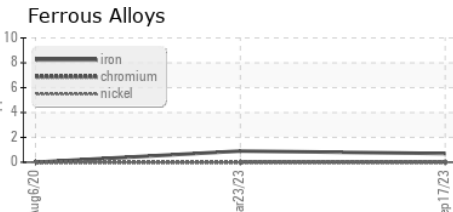




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0797081 **Received** : 06 Oct 2023
Lab Number : **02587811** **Diagnosed** : 11 Oct 2023
Unique Number : 5656877 **Diagnostician** : Kevin Marson
Test Package : MAR 3 (Additional Tests: TAN Man)

CANSHIP UGLAND LTD.
 PLACENTIA HOPE, P.O. BOX 8274, STN. A
 ST. JOHN'S, NL
 CA A1B 3N4
 Contact: Brian Bishop
 bbishop@canship.com
 T: (709)782-7341
 F: (709)782-0225

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Machine Id
PH814.060.01 (S/N 88256)
 Component
Starboard Gearbox
 Fluid
PETRO CANADA ULTIMA EP 68 (40 LTR)

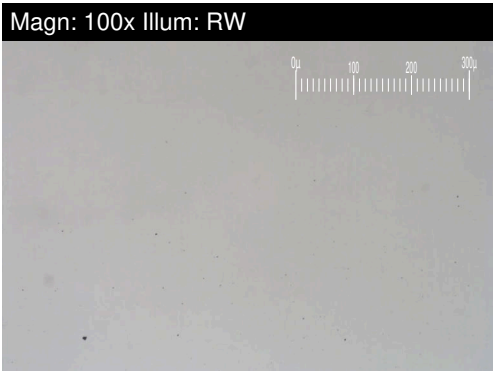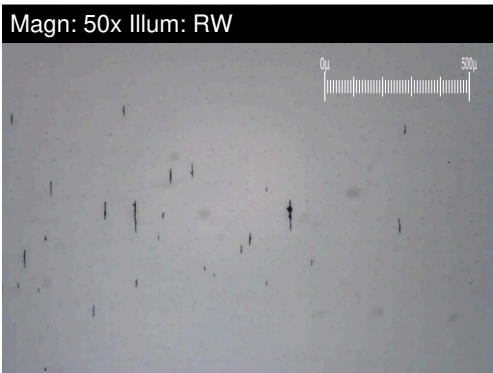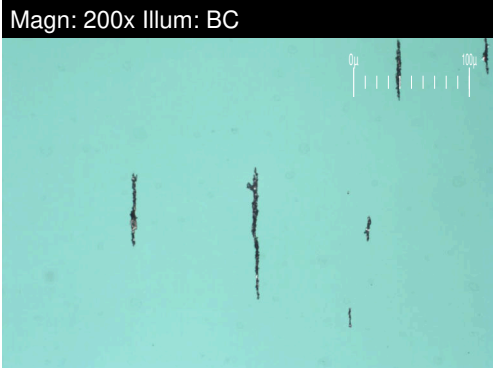


| DR-FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|----------------------------|---|----------|------------|-------------|----------|----------|
| Large Particles | | DR-Ferr* | | 6.9 | --- | --- |
| Small Particles | | DR-Ferr* | | 5.5 | --- | --- |
| Total Particles | | DR-Ferr* | >--- | 12.4 | --- | --- |
| Large Particles Percentage | % | DR-Ferr* | | 11.3 | --- | --- |
| Severity Index | | DR-Ferr* | | 10 | --- | --- |

| FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|-----------------------|------------|-------------|------------|----------|----------|----------|
| Ferrous Rubbing | Scale 0-10 | ASTM D7684* | | 2 | | |
| Ferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Rolling | Scale 0-10 | ASTM D7684* | | 1 | | |
| Ferrous Break-in | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Black Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Red Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Corrosive | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rubbing | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rolling | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Carbonaceous Material | Scale 0-10 | ASTM D7684* | | | | |
| Lubricant Degradation | Scale 0-10 | ASTM D7684* | | | | |
| Sand/Dirt | Scale 0-10 | ASTM D7684* | | 1 | | |
| Fibres | Scale 0-10 | ASTM D7684* | | | | |
| Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Other | Scale 0-10 | ASTM D7684* | | 1 | | |

WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

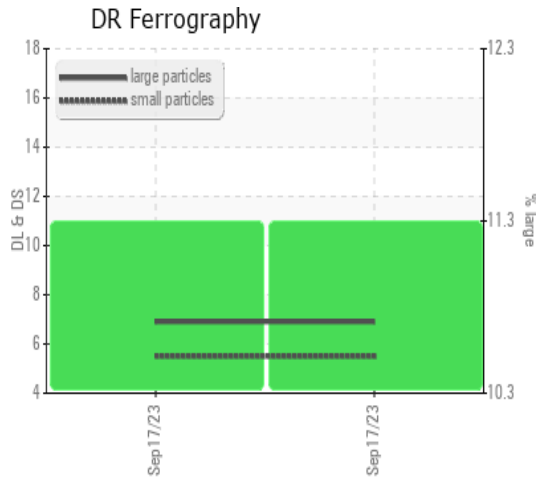

This page left intentionally blank