




PROBLEM SUMMARY

Sample Rating Trend

ISO




Machine Id
PH.632.010.17 (S/N 3437)
 Component
Port Variable Pitch Prop
 Fluid
PETRO CANADA ULTIMA EP 150 (4500 LTR)

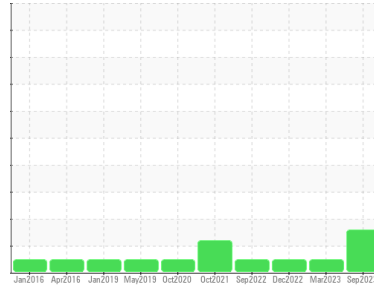

COMPONENT CONDITION SUMMARY

▲ Particle Trend

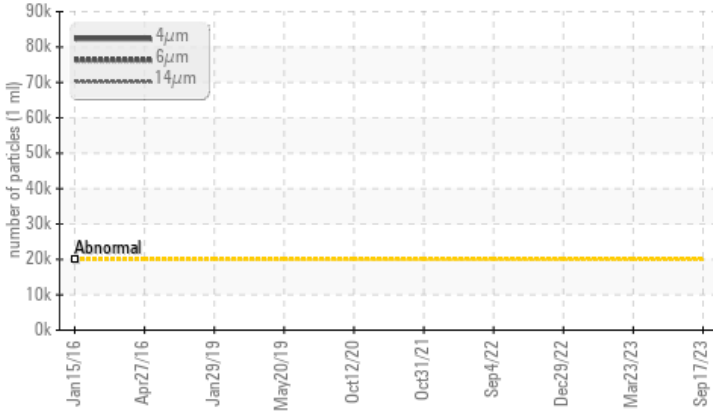

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

PROBLEMATIC TEST RESULTS

| Sample Status | | | ABNORMAL | NORMAL | NORMAL |
|-----------------|--------------|-----------|------------|--------|--------|
| Particles >4µm | ASTM D7647 | >20000 | ▲ 86955 | --- | --- |
| Particles >6µm | ASTM D7647 | >5000 | ▲ 15690 | --- | --- |
| Particles >14µm | ASTM D7647 | >320 | ▲ 603 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >21/19/15 | ▲ 24/21/16 | --- | --- |

Customer Id: PLACHOPE
 Sample No.: WC0785236
 Lab Number: 02587814
 Test Package: MAR 3



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|------------------|--------|------|---------|---|
| Change Filter | --- | --- | ? | We recommend you service the filters on this component. |
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Contact Required | --- | --- | ? | Please contact your representative for information regarding the proper sampling kits for your service. |
| Alert | --- | --- | ? | NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. |

HISTORICAL DIAGNOSIS

23 Mar 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service (unconfirmed).

view report



29 Dec 2022 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid. Component wear rates appear to be normal (unconfirmed). There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service (unconfirmed).

view report



04 Sep 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service (unconfirmed).

view report






OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Machine Id
PH.632.010.17 (S/N 3437)
 Component
Port Variable Pitch Prop
 Fluid
PETRO CANADA ULTIMA EP 150 (4500 LTR)

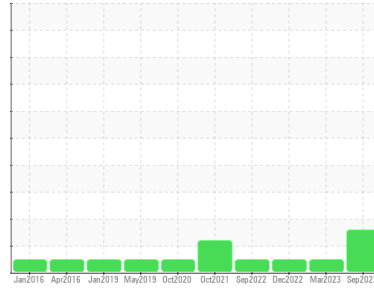

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using Advanced Oil Monitoring (AOM) kits for this system. The AOM test package includes advanced level testing to determine the suitability of turbine and large industrial compressor oils for continued use.

Wear

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Oil Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service (unconfirmed). The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | WC0785236 | WC0671097 | WC0671104 |
| Sample Date | Client Info | | 17 Sep 2023 | 23 Mar 2023 | 29 Dec 2022 |
| Machine Age | hrs | Client Info | 38442 | 37829 | 37450 |
| Oil Age | hrs | Client Info | 0 | 0 | 1974 |
| Oil Changed | Client Info | | Not Chngd | Changed | Not Chngd |
| Sample Status | | | ABNORMAL | NORMAL | NORMAL |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|-------------|-------------------|--------------|----------|----------|
| PQ | ASTM D8184* | | 0 | --- | --- |
| Iron | ppm | ASTM D5185(m) >25 | 6 | 5 | 3 |
| Chromium | ppm | ASTM D5185(m) >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185(m) >10 | <1 | <1 | <1 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185(m) >5 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185(m) >5 | 3 | 4 | 3 |
| Copper | ppm | ASTM D5185(m) >55 | 27 | 31 | 28 |
| Tin | ppm | ASTM D5185(m) >5 | 3 | 3 | 2 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | <1 | <1 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|--------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185(m) 50 | 22 | 41 | 41 |
| Barium | ppm | ASTM D5185(m) 0 | <1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185(m) 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185(m) | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185(m) 0 | 1 | 2 | 2 |
| Calcium | ppm | ASTM D5185(m) 0 | 10 | 11 | 11 |
| Phosphorus | ppm | ASTM D5185(m) 270 | 226 | 257 | 246 |
| Zinc | ppm | ASTM D5185(m) 0 | 8 | 6 | 6 |
| Sulfur | ppm | ASTM D5185(m) 5300 | 6671 | 6742 | 6609 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS






| | method | limit/base | current | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon | ppm | ASTM D5185(m) >15 | 4 | 5 | 2 |
| Sodium | ppm | ASTM D5185(m) | 11 | 14 | 13 |
| Potassium | ppm | ASTM D5185(m) >20 | 0 | <1 | <1 |

FLUID CLEANLINESS

| | method | limit/base | current | history1 | history2 |
|-----------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 | >20000 | ▲ 86955 | --- | --- |
| Particles >6µm | ASTM D7647 | >5000 | ▲ 15690 | --- | --- |
| Particles >14µm | ASTM D7647 | >320 | ▲ 603 | --- | --- |
| Particles >21µm | ASTM D7647 | >80 | 87 | --- | --- |
| Particles >38µm | ASTM D7647 | >20 | 2 | --- | --- |
| Particles >71µm | ASTM D7647 | >4 | 0 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >21/19/15 | ▲ 24/21/16 | --- | --- |



OIL ANALYSIS REPORT

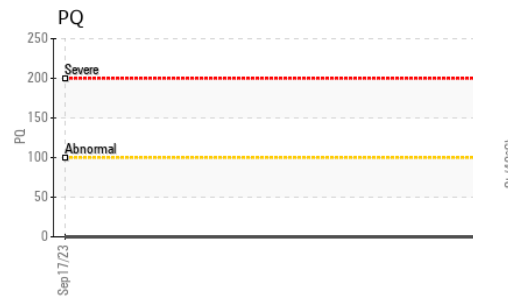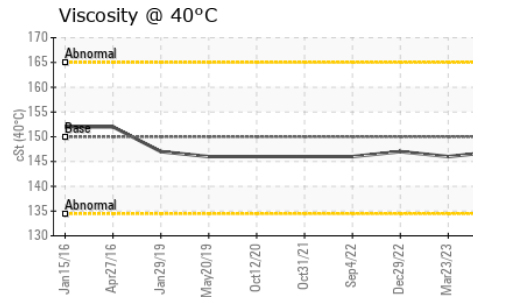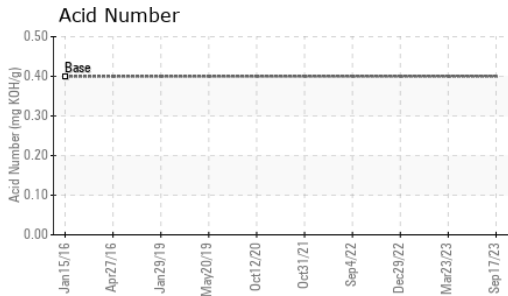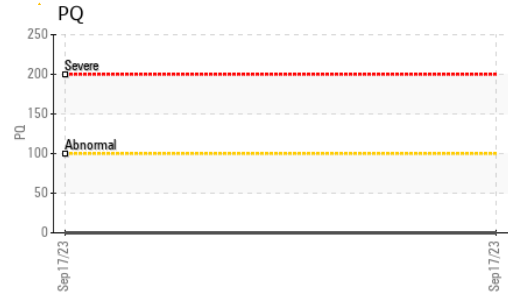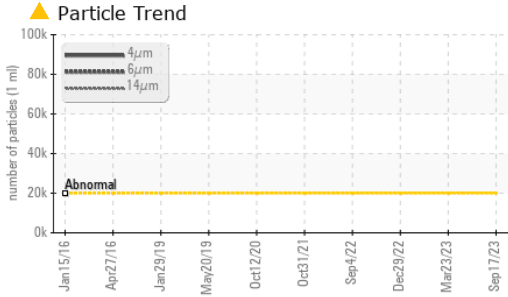

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | 0.4 | 0.43 | --- | --- |




| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | Visual* | NONE | LIGHT | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 150.0 | 147 | 146 | 147 |

SAMPLE IMAGES



GRAPHS

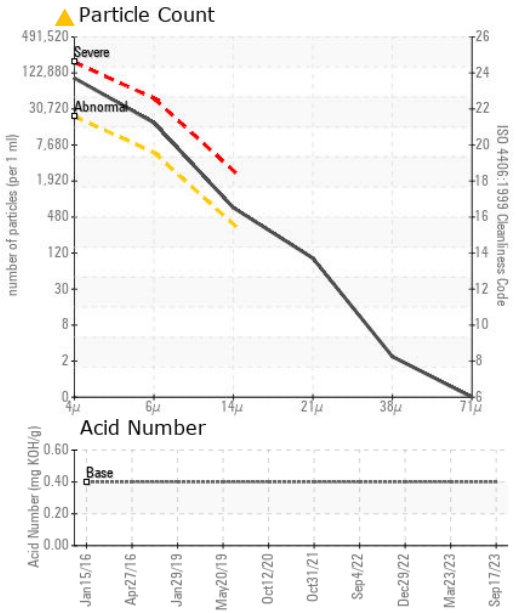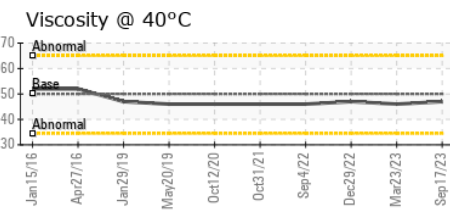




Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0785236
Lab Number : **02587814**
Unique Number : 5656880
Test Package : MAR 3 (Additional Tests: TAN Man)

CANSHIP UGLAND LTD.
 PLACENTIA HOPE, P.O. BOX 8274, STN. A
 ST. JOHN'S, NL
 CA A1B 3N4
 Contact: Brian Bishop
 bbishop@canship.com
 T: (709)782-7341
 F: (709)782-0225

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Machine Id
PH.632.010.17 (S/N 3437)
 Component
Port Variable Pitch Prop
 Fluid
PETRO CANADA ULTIMA EP 150 (4500 LTR)

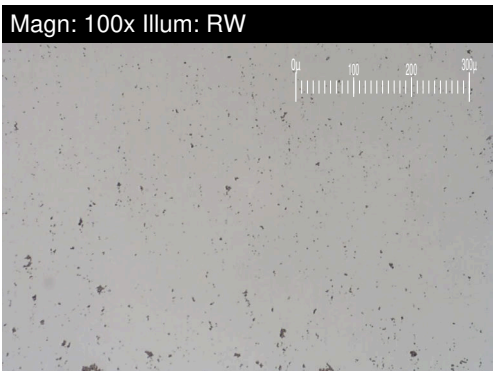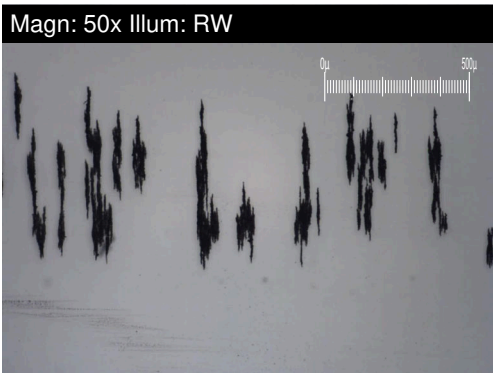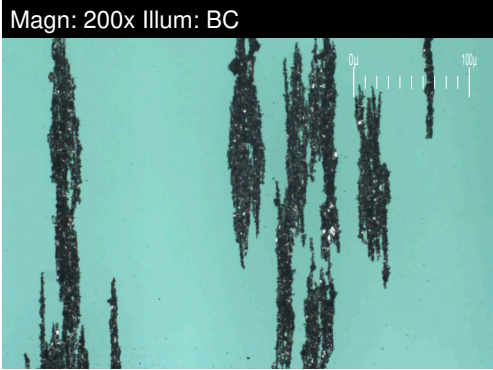


| DR-FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|----------------------------|---|----------|------------|-------------|----------|----------|
| Large Particles | | DR-Ferr* | | 8.5 | --- | --- |
| Small Particles | | DR-Ferr* | | 6.2 | --- | --- |
| Total Particles | | DR-Ferr* | >--- | 14.7 | --- | --- |
| Large Particles Percentage | % | DR-Ferr* | | 15.6 | --- | --- |
| Severity Index | | DR-Ferr* | | 20 | --- | --- |

| FERROGRAPHY | | method | limit/base | current | history1 | history2 |
|-----------------------|------------|-------------|------------|---------|----------|----------|
| Ferrous Rubbing | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Rolling | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Break-in | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Black Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Red Oxides | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Corrosive | Scale 0-10 | ASTM D7684* | | | | |
| Ferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rubbing | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Sliding | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Cutting | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Rolling | Scale 0-10 | ASTM D7684* | | | | |
| Nonferrous Other | Scale 0-10 | ASTM D7684* | | | | |
| Carbonaceous Material | Scale 0-10 | ASTM D7684* | | | | |
| Lubricant Degradation | Scale 0-10 | ASTM D7684* | | | | |
| Sand/Dirt | Scale 0-10 | ASTM D7684* | | | | |
| Fibres | Scale 0-10 | ASTM D7684* | | | | |
| Spheres | Scale 0-10 | ASTM D7684* | | | | |
| Other | Scale 0-10 | ASTM D7684* | | | | |

WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

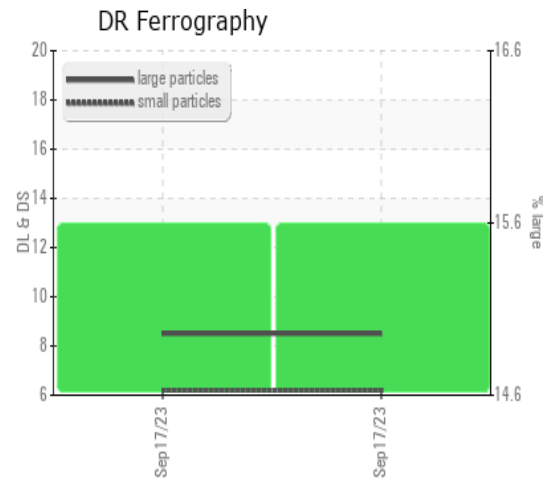

This page left intentionally blank