




PROBLEM SUMMARY


Area
6 Calender Line
 Machine Id
39-0034 South Cooling Mixer
 Component
Gearbox
 Fluid
MOBIL GLYGOYLE 30 (70 LTR)

Sample Rating Trend

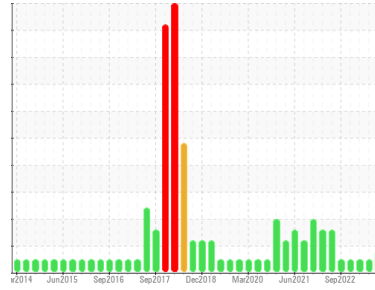

COMPONENT CONDITION SUMMARY

▲ Ferrous Alloys

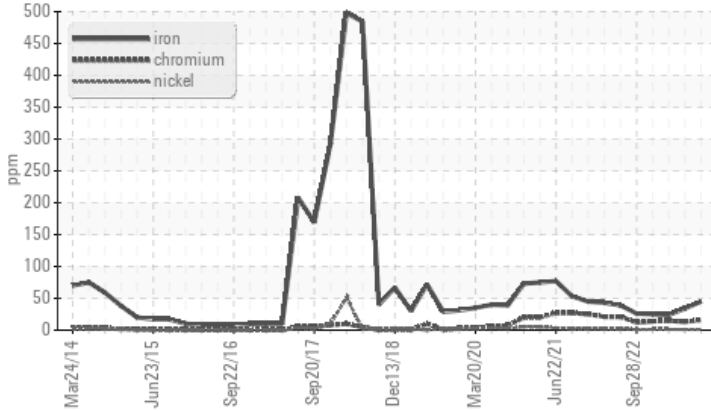

RECOMMENDATION

We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				MARGINAL	NORMAL	NORMAL
Chromium	ppm	ASTM D5185(m)	>15	▲ 16	13	15

Customer Id: CAN52CAM
 Sample No.: WC0808299
 Lab Number: 02587825
 Test Package: IND 1



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Kevin Marson +1 (289)291-4644 x4644
Kevin.Marson@wearcheck.com

To change component or sample information:
 Gloria Gonzalez +1 (289)291-4643 x4643
gloria.gonzalez@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.

HISTORICAL DIAGNOSIS

06 Jul 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



31 Mar 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.

view report



24 Jan 2023 Diag: Kevin Marson

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The condition of the oil is acceptable for the time in service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

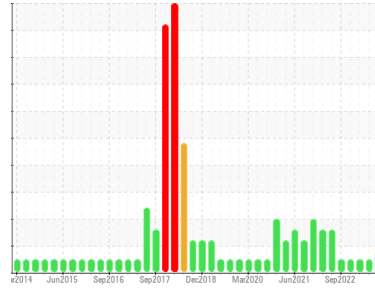

WEAR



Area
6 Calender Line
 Machine Id
39-0034 South Cooling Mixer
 Component
Gearbox
 Fluid
MOBIL GLYGOYLE 30 (70 LTR)

DIAGNOSIS

Recommendation

We recommend an early resample to monitor this condition.

Wear

Chromium ppm levels are marginal. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0808299	WC0782353	WC0744122
Sample Date	Client Info		04 Oct 2023	06 Jul 2023	31 Mar 2023
Machine Age	hrs	Client Info	0	0	0
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			MARGINAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>200	45	34	24
Chromium	ppm	ASTM D5185(m)	>15	▲ 16	13	15
Nickel	ppm	ASTM D5185(m)	>15	1	1	1
Titanium	ppm	ASTM D5185(m)		12	11	11
Silver	ppm	ASTM D5185(m)		<1	0	0
Aluminum	ppm	ASTM D5185(m)	>25	1	1	1
Lead	ppm	ASTM D5185(m)	>100	2	1	1
Copper	ppm	ASTM D5185(m)	>200	45	43	44
Tin	ppm	ASTM D5185(m)	>25	6	6	6
Antimony	ppm	ASTM D5185(m)	>5	10	9	8
Vanadium	ppm	ASTM D5185(m)		0	0	<1
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		18	15	13
Barium	ppm	ASTM D5185(m)		4	3	3
Molybdenum	ppm	ASTM D5185(m)		<1	<1	0
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		2	2	1
Calcium	ppm	ASTM D5185(m)		290	213	224
Phosphorus	ppm	ASTM D5185(m)		1162	1196	1228
Zinc	ppm	ASTM D5185(m)		5	5	3
Sulfur	ppm	ASTM D5185(m)		127	127	101
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS



	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>50	10	9	9
Sodium	ppm	ASTM D5185(m)		5	3	3
Potassium	ppm	ASTM D5185(m)	>20	<1	1	1

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG






OIL ANALYSIS REPORT

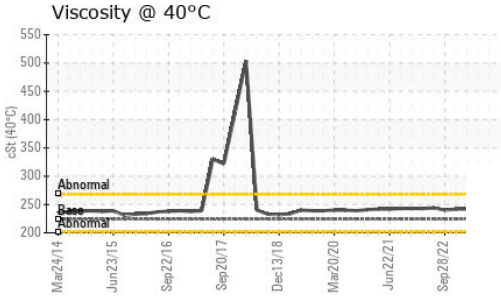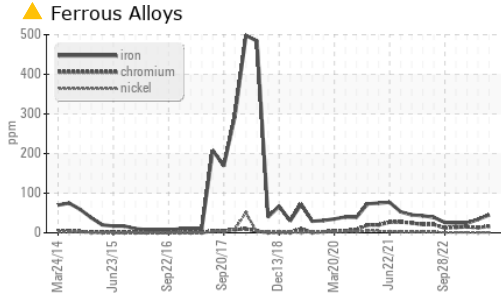

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	224	244	242

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

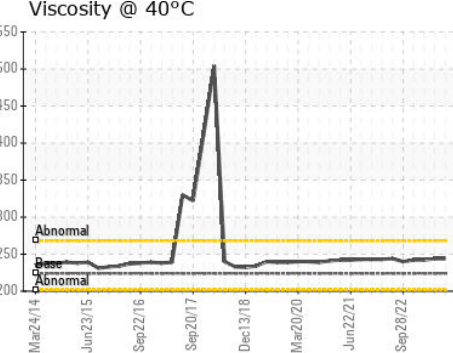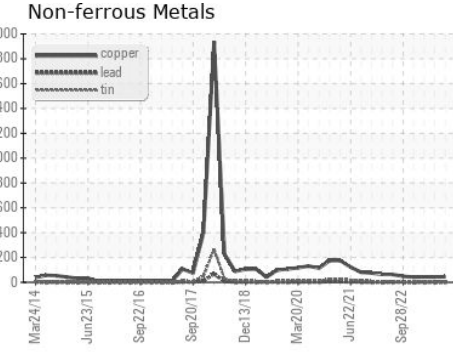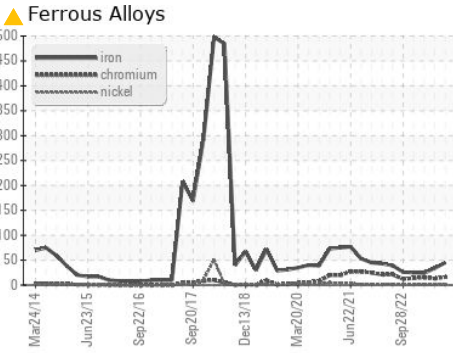

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **CANADIAN GENERAL TOWER LTD.**
Sample No. : WC0808299 **Received** : 06 Oct 2023 52 MIDDLETON STREET, P.O. BOX 160
Lab Number : 02587825 **Diagnosed** : 06 Oct 2023 CAMBRIDGE, ON
Unique Number : 5656891 **Diagnostician** : Kevin Marson CA N1S 2R4
Test Package : IND 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Bob Abell
 bob.abell@cgtower.com
 T: (519)623-1630
 F: (519)623-7018