




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

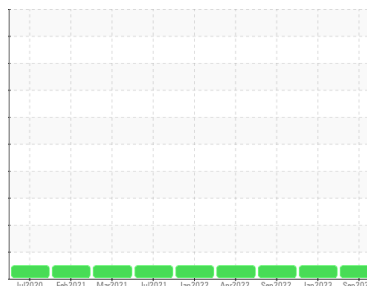

Machine Id  
**9020**  
 Component  
**4 Swing Drive**  
 Fluid  
**BELRAY 100 EP GEAR OIL 680 (377 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>BR0000724</b>	BR0000697	BR0000595
Sample Date	Client Info			<b>21 Sep 2023</b>	19 Jan 2023	15 Sep 2022
Machine Age	hrs	Client Info		<b>0</b>	128377	125861
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>400	<b>1</b>	25	24
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	4	3
Lead	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	76	76
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>3</b>	1	2
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)		<b>122</b>	102	102
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185(m)		<b>12</b>	3	4
Phosphorus	ppm	ASTM D5185(m)		<b>671</b>	920	905
Zinc	ppm	ASTM D5185(m)		<b>10</b>	33	32
Sulfur	ppm	ASTM D5185(m)		<b>7158</b>	8251	8038
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>2</b>	4	4
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT



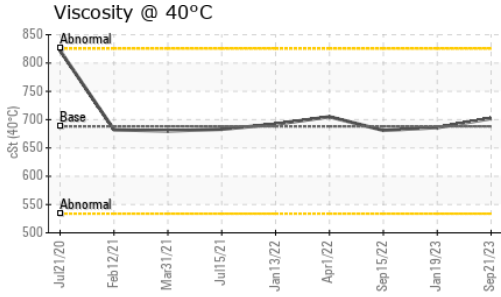


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	688	<b>702</b>	686	681

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color			
Bottom			

## GRAPHS

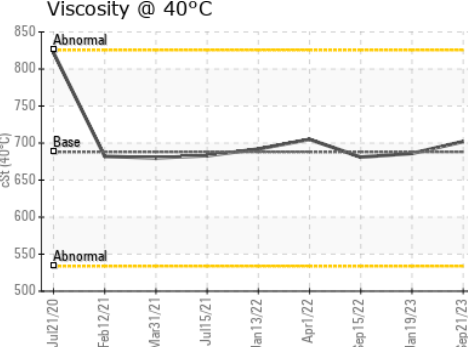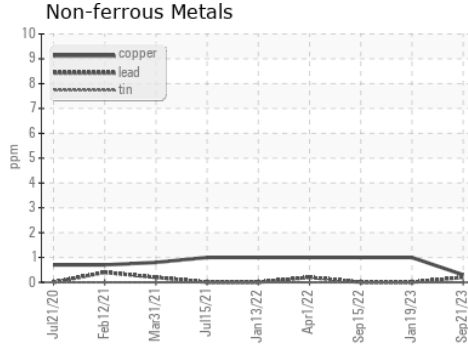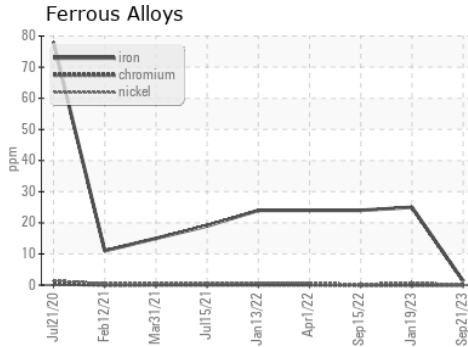

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 CAN JER INDUSTRIAL LUBRICANT LTD  
**Sample No.** : BR0000724 **Received** : 06 Oct 2023 419 MISSISSIPPIAN DRIVE  
**Lab Number** : **02587844** **Diagnosed** : 06 Oct 2023 ESTEVAN, SK  
**Unique Number** : 5656910 **Diagnostician** : Wes Davis CA S4A 2A4  
**Test Package** : IND 1

To discuss this sample report, contact Customer Service at 1-800-268-2131. Contact: LANDON LILLEJORD  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. lilljrd@canjer.com  
 Validity of results and interpretation are based on the sample and information as supplied. T:  
F: