

OIL ANALYSIS REPORT

Hydro-Quebec - H03000 A2310034

Component Unknown Component Fluid TOTAL TURBOSPEC 925 HQ (--- GAL)

DIAGNOSIS


Recommendation

This is a baseline read-out on the submitted sample.

Wear

{not applicable}

Contamination {not applicable}





NORMAL

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Batch #		Client Info		2023 09 0191		
Machine ID		Client Info		A2310034		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		10/05/2023		
Sample Number		Client Info		E30000488		
Sample Date		Client Info		05 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		<1		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		1		
Copper	ppm	ASTM D5185(m)		<1		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium Cadmium	ppm	ASTM D5185(m) ASTM D5185(m)		0		
	ppm					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	0	0		
Barium	ppm	ASTM D5185(m)	0	<1		
Molybdenum	ppm	ASTM D5185(m)	0	0		
Manganese	ppm	ASTM D5185(m) ASTM D5185(m)	0	0		
Magnesium Calcium	ppm ppm	ASTM D5185(m)	0	2		
Phosphorus		ASTM D5185(m) ASTM D5185(m)	10	2		
Zinc	ppm ppm	ASTM D5185(m)		23 5		
Sulfur	ppm	ASTM D5185(m)	1000	5 1997		
Lithium	ppm	ASTM D5185(m)	1000	<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		2		
Sodium	ppm	ASTM D5185(m)		0		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*	-	0.00		
ppm Water	ppm	ASTM D6304*		0.00		


Sample Rating Trend




0.00


OIL ANALYSIS REPORT


Color

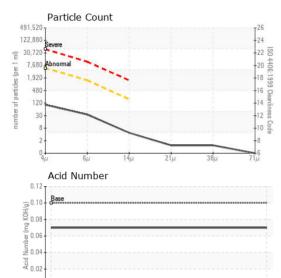

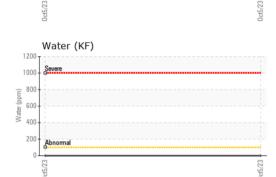

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	88		
Particles >6µm		ASTM D7647	>1300	30		
Particles >14µm		ASTM D7647	>160	4		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/17/14	14/12/9		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.1	0.07		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	52.5	50.7		
Visc @ 100°C	cSt	ASTM D7279(m)	7.25	7.3		
Viscosity Index (VI)	Scale	ASTM D2270*	96	103		
SAMPLE IMAGES	6	method	limit/base	current	history1	history2
				BRAD		

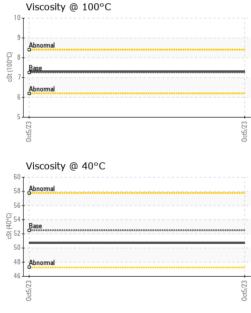

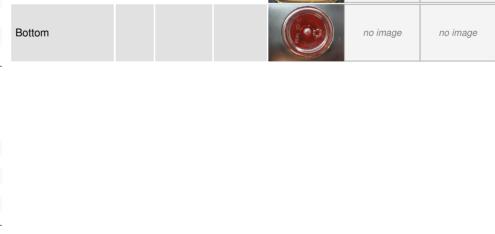

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Environmental 360 Solutions Ltd. Laboratory CALA Sample No. : E30000488 Received : 10 Oct 2023 640 Victoria Street Lab Number : 02587994 Diagnosed : 12 Oct 2023 Cobourg, ON ISO 17025:2017 Accredited Laboratory Unique Number : 5657060 Diagnostician : Tatiana Sorkina CA K9A 5H5 Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) Contact: Aylwin Lee To discuss this sample report, contact Customer Service at 1-800-268-2131. aylwinlee@e360s.ca T: (905)372-2251 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied. F: (905)373-4950

no image

no image