




# OIL ANALYSIS REPORT

Sample Rating Trend

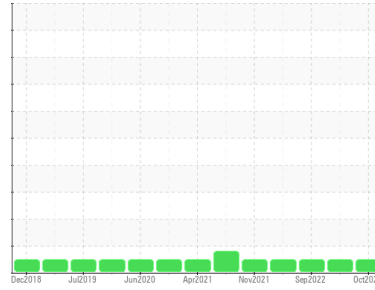

**NORMAL**



Area  
**50000 Series**  
 Machine Id  
**Navistar 50504**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (40 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0848040</b>	WC0771276	WC0738259
Sample Date	Client Info			<b>07 Oct 2023</b>	08 Feb 2023	24 Sep 2022
Machine Age	mls Client Info			<b>401989</b>	376555	347949
Oil Age	mls Client Info			<b>25434</b>	28611	28595
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>50</b>	37	23
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>7</b>	10	8
Lead	ppm	ASTM D5185(m)	>40	<b>2</b>	2	<1
Copper	ppm	ASTM D5185(m)	>330	<b>3</b>	2	1
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2	<b>3</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>62</b>	66	60
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>988</b>	1064	973
Calcium	ppm	ASTM D5185(m)	1050	<b>1095</b>	1211	1108
Phosphorus	ppm	ASTM D5185(m)	995	<b>985</b>	1189	1060
Zinc	ppm	ASTM D5185(m)	1180	<b>1210</b>	1340	1193
Sulfur	ppm	ASTM D5185(m)	2600	<b>2472</b>	2668	2548
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>7</b>	4	5
Sodium	ppm	ASTM D5185(m)		<b>3</b>	2	3
Potassium	ppm	ASTM D5185(m)	>20	<b>4</b>	<1	10

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>2.8</b>	0.4	1.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.3</b>	12.2	10.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>27.5</b>	25.3	24.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>18.7</b>	21.0	16.8











# OIL ANALYSIS REPORT

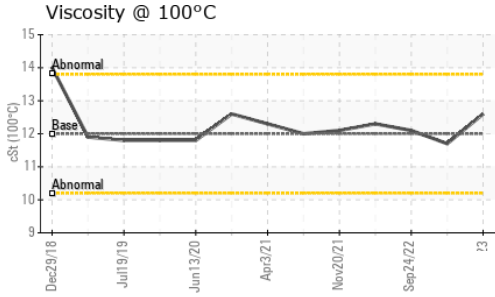

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>12.6</b>	11.7	12.1

## GRAPHS

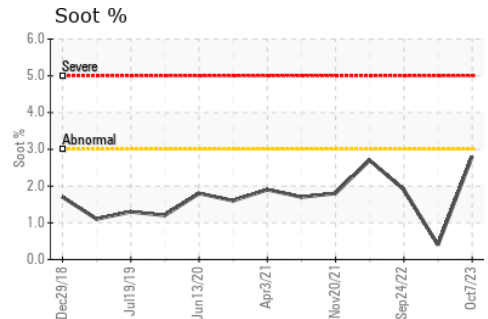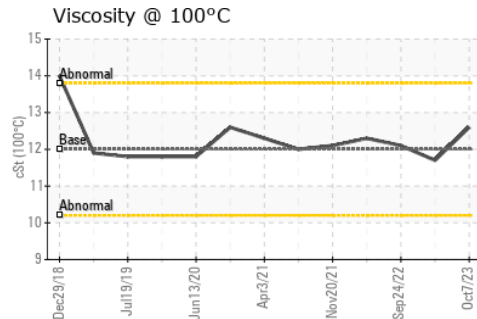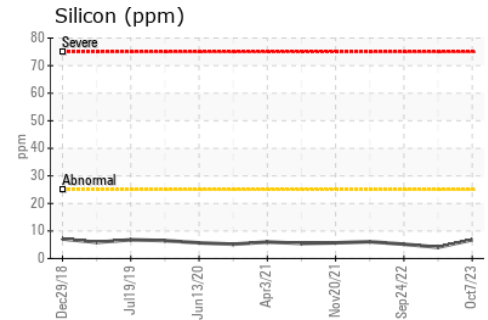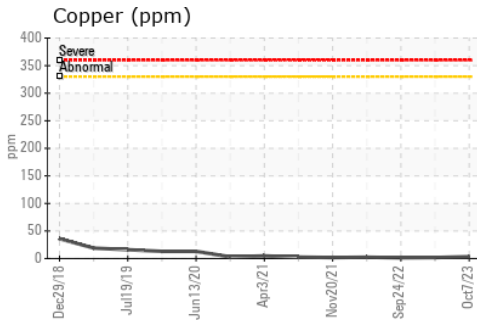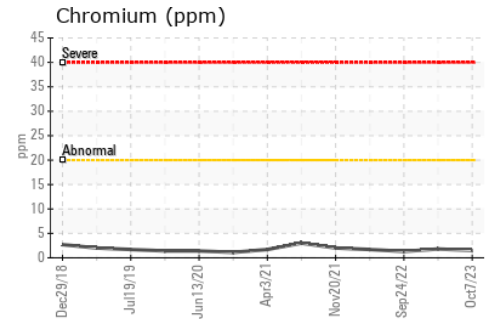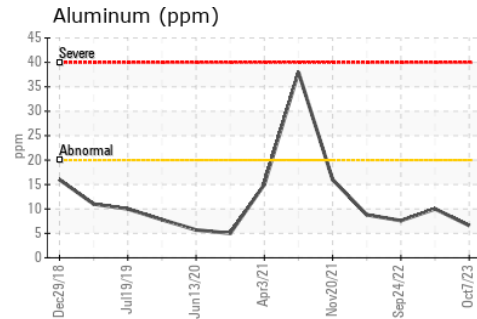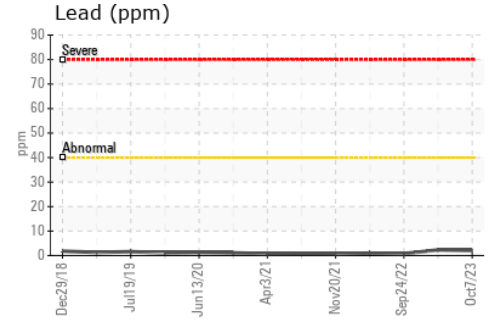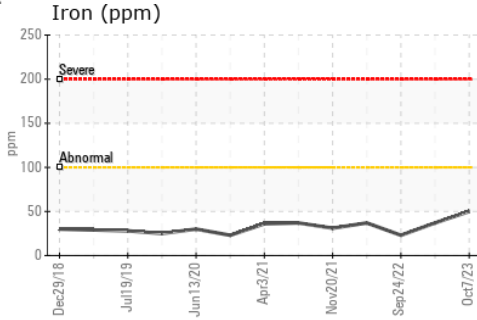

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **MANITOU LIN TRANSPORT (GARAGE)**  
**Sample No.** : WC0848040 **Received** : 11 Oct 2023 1335 SHAWSON DRIVE  
**Lab Number** : **02588148** **Diagnosed** : 11 Oct 2023 MISSISSAUGA, ON  
**Unique Number** : 5657214 **Diagnostician** : Wes Davis CA L4W 1C4  
**Test Package** : MOB 1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Travis Spence  
 tspence@manitoulintransport.com  
 T:  
 F: (905)564-6361