




OIL ANALYSIS REPORT

Sample Rating Trend

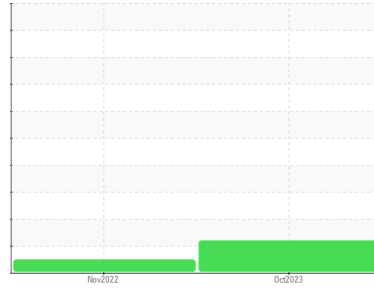

FUEL



Machine Id
10-682 (20)

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0864564	WC0716308	---
Sample Date	Client Info		11 Oct 2023	27 Nov 2022	---
Machine Age	hrs	Client Info	17123	0	---
Oil Age	hrs	Client Info	500	500	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			ABNORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	9	12	---
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>4	0	2	---
Titanium	ppm	ASTM D5185(m)		0	<1	---
Silver	ppm	ASTM D5185(m)	>3	<1	0	---
Aluminum	ppm	ASTM D5185(m)	>20	6	3	---
Lead	ppm	ASTM D5185(m)	>40	<1	2	---
Copper	ppm	ASTM D5185(m)	>330	1	2	---
Tin	ppm	ASTM D5185(m)	>15	0	<1	---
Antimony	ppm	ASTM D5185(m)		0	<1	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	250	99	29	---
Barium	ppm	ASTM D5185(m)	10	<1	0	---
Molybdenum	ppm	ASTM D5185(m)	100	193	<1	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	450	114	15	---
Calcium	ppm	ASTM D5185(m)	3000	1847	2203	---
Phosphorus	ppm	ASTM D5185(m)	1150	879	988	---
Zinc	ppm	ASTM D5185(m)	1350	1032	1100	---
Sulfur	ppm	ASTM D5185(m)	4250	2890	2845	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	13	5	---
Sodium	ppm	ASTM D5185(m)	>158	10	4	---
Potassium	ppm	ASTM D5185(m)	>20	28	8	---
Fuel	%	ASTM D7593*	>5	▲ 2	<1.0	---
Glycol	%	ASTM D7922*		0.0	NEG	---

INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0	0.1	---
Nitration	Abs/cm	ASTM D7624*	>20	8.6	11.3	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.6	28.0	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.9	23.2	---











OIL ANALYSIS REPORT

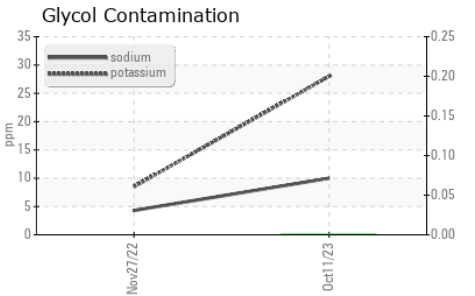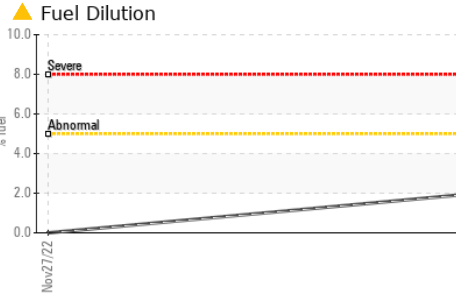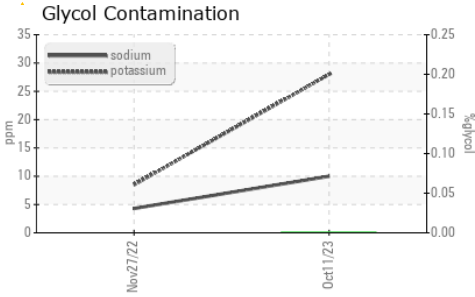

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	▲ 10.8	13.1

GRAPHS

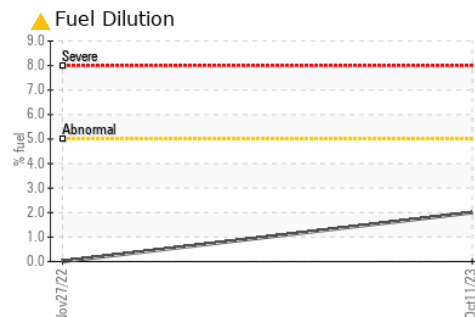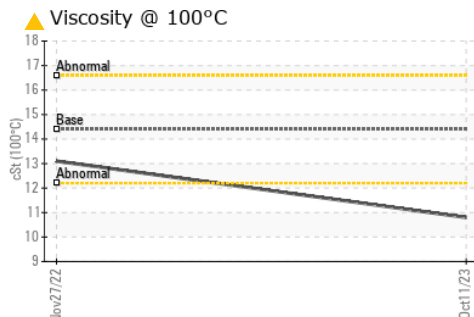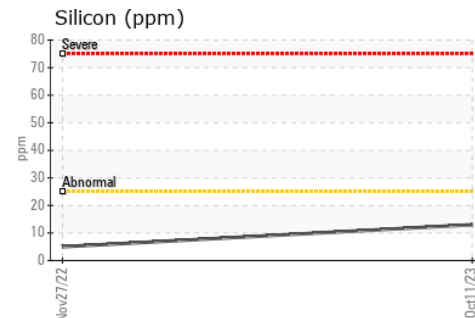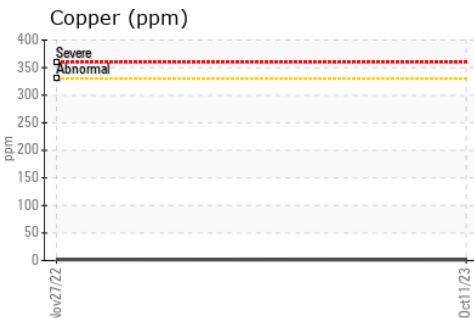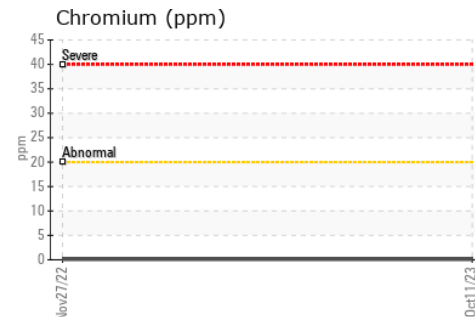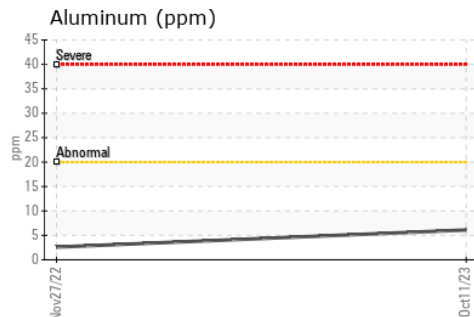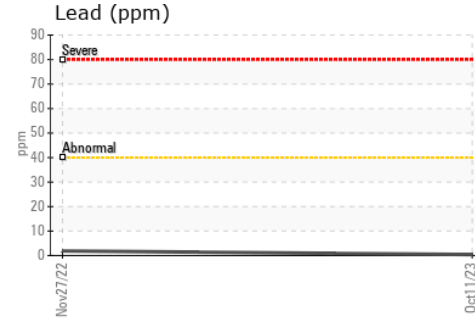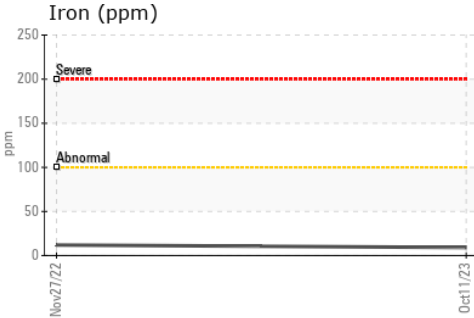

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0864564 **Received** : 12 Oct 2023
Lab Number : 02588487 **Diagnosed** : 13 Oct 2023
Unique Number : 5657553 **Diagnostician** : Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, Glycol, PercentFuel)

COLACEM CANADA INC
 56 RUE LONGUEUIL CP 301
 L'ORIGINAL, ON
 CA K0B 1K0
 Contact: Gabriel Parent
 gparent@colacem.ca
 T:
 F: (613)675-2747

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.