




OIL ANALYSIS REPORT

Sample Rating Trend

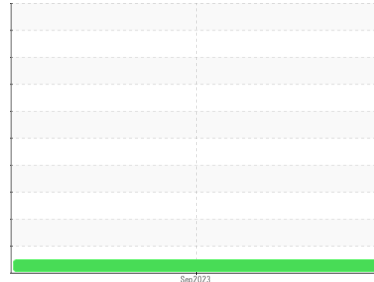

NORMAL



Machine Id
JOHN DEERE JOHN DEERE 7215

Component
Diesel Engine

Fluid
PETRO CANADA 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			TR02588501	---	---
Sample Date	Client Info			18 Sep 2023	---	---
Machine Age	hrs	Client Info		250	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			Changed	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>2.1	<1.0	---	---
Glycol	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>51	88	---	---
Chromium	ppm	ASTM D5185(m)	>11	5	---	---
Nickel	ppm	ASTM D5185(m)	>5	7	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	<1	---	---
Aluminum	ppm	ASTM D5185(m)	>31	8	---	---
Lead	ppm	ASTM D5185(m)	>26	<1	---	---
Copper	ppm	ASTM D5185(m)	>26	5	---	---
Tin	ppm	ASTM D5185(m)	>4	<1	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		2	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		64	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		1017	---	---
Calcium	ppm	ASTM D5185(m)		1082	---	---
Phosphorus	ppm	ASTM D5185(m)		1005	---	---
Zinc	ppm	ASTM D5185(m)		1230	---	---
Sulfur	ppm	ASTM D5185(m)		2510	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>22	27	---	---
Sodium	ppm	ASTM D5185(m)		3	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	0.2	---	---
Nitration	Abs/cm	ASTM D7624*	>20	6.5	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.2	---	---



OIL ANALYSIS REPORT







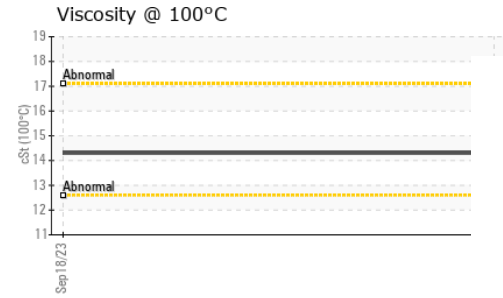
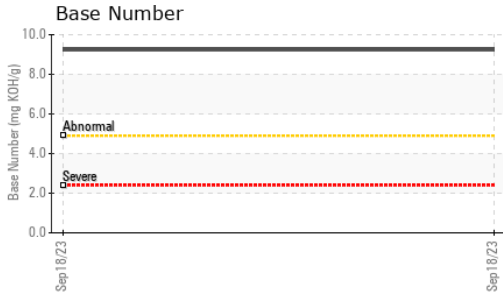


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.4	---
Base Number (BN)	mg KOH/g	ASTM D2896*		9.24	---

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.21	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)		14.3	---

GRAPHS

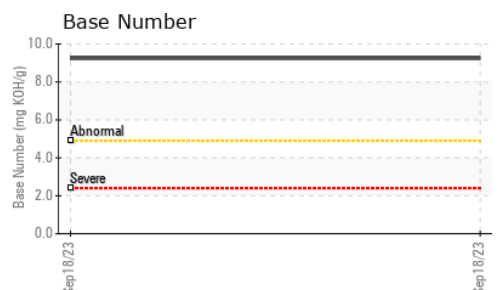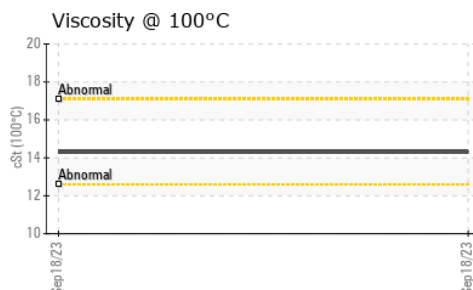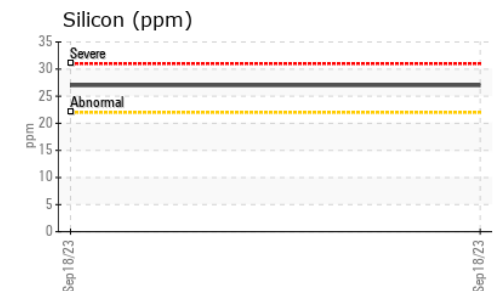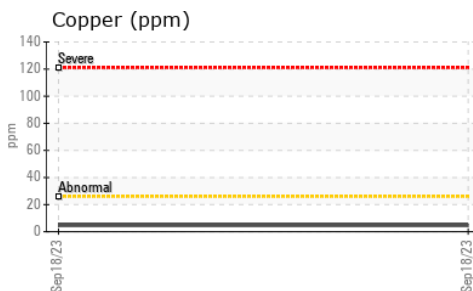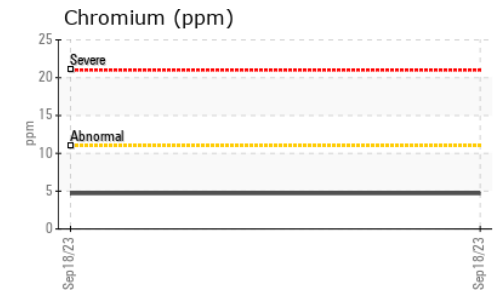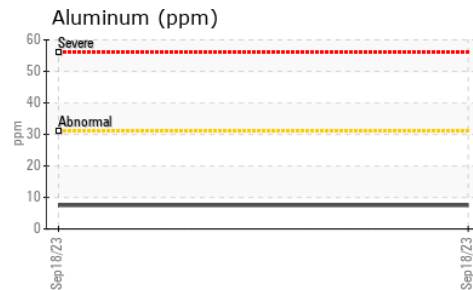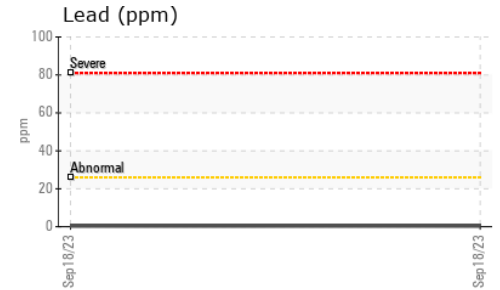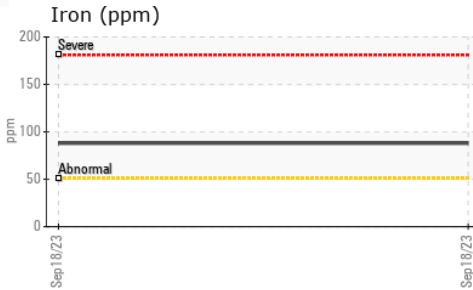

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : TR02588501 **Received** : 12 Oct 2023
Lab Number : **02588501** **Diagnosed** : 16 Oct 2023
Unique Number : 5657567 **Diagnostician** : Wes Davis
Test Package : MOB 2

ROY KRAHULEC
 BOX 310
 WASKATENAU, AB
 CA T0A 3P0
 Contact: Roy Krahulec

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (780)656-0335

F: