

OIL ANALYSIS REPORT

Area Beneco - 888053 Machine Id AG202-R

Component Hydraulic System Fluid R&O OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation


This is a baseline read-out on the submitted sample.

Wear

{not applicable} Contamination

{not applicable}

Fluid Condition {not applicable}









| SAMPLE INFORM | IATION | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|------------|-------------|----------|----------|
| Batch # | | Client Info | | AG202R | | |
| Machine ID | | Client Info | | Sales | | |
| Department | | Client Info | | Machine | | |
| Sample From | | Client Info | | Final | | |
| Production Stage | | Client Info | | 10/10/2023 | | |
| Sample Number | | Client Info | | E30000494 | | |
| Sample Date | | Client Info | | 03 Oct 2023 | | |
| Machine Age | hrs | Client Info | | 0 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | N/A | | |
| Sample Status | | | | NORMAL | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185(m) | >20 | 0 | | |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | | |
| Nickel | ppm | ASTM D5185(m) | >20 | <1 | | |
| Titanium | ppm | ASTM D5185(m) | | 0 | | |
| Silver | ppm | ASTM D5185(m) | | <1 | | |
| Aluminum | ppm | ASTM D5185(m) | >20 | 0 | | |
| Lead | ppm | ASTM D5185(m) | >20 | <1 | | |
| Copper | ppm | ASTM D5185(m) | >20 | <1 | | |
| Tin | ppm | ASTM D5185(m) | >20 | 0 | | |
| Antimony | ppm | ASTM D5185(m) | | 0 | | |
| Vanadium | ppm | ASTM D5185(m) | | 0 | | |
| Beryllium | ppm | ASTM D5185(m) | | 0 | | |
| Cadmium | ppm | ASTM D5185(m) | | 0 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185(m) | 5 | <1 | | |
| Barium | ppm | ASTM D5185(m) | 5 | <1 | | |
| Molybdenum | ppm | ASTM D5185(m) | 5 | 0 | | |
| Manganese | ppm | ASTM D5185(m) | | 0 | | |
| Magnesium | ppm | ASTM D5185(m) | 5 | 0 | | |
| Calcium | ppm | ASTM D5185(m) | 5 | 0 | | |
| Phosphorus | ppm | ASTM D5185(m) | 100 | 2 | | |
| Zinc | ppm | ASTM D5185(m) | 25 | 2 | | |
| Sulfur | ppm | ASTM D5185(m) | 1500 | 12 | | |
| Lithium | ppm | ASTM D5185(m) | | <1 | | |
| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185(m) | >15 | 0 | | |
| Sodium | ppm | ASTM D5185(m) | | 1 | | |
| Potassium | ppm | ASTM D5185(m) | >20 | 0 | | |
| Water | % | ASTM D6304* | >0.05 | 0.001 | | |
| ppm Water | ppm | ASTM D6304* | >500 | 6.6 | | |




OIL ANALYSIS REPORT

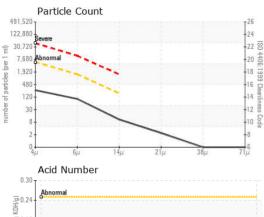





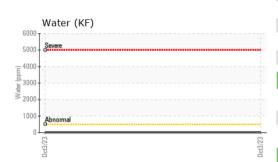



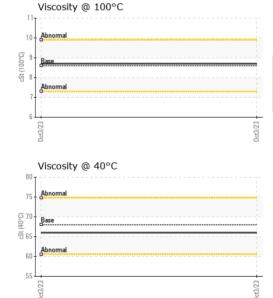

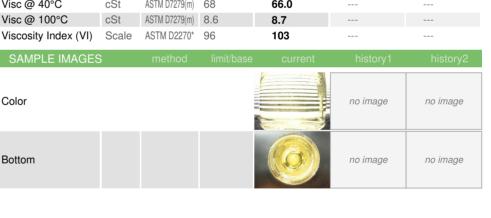

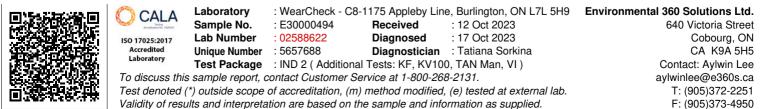

Contact/Location: Aylwin Lee - CHECOB