



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**Goodyear - G04000**  
 Machine Id  
**A2310051**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## DIAGNOSIS

### Recommendation

This is a baseline read-out on the submitted sample.

### Wear

Copper and iron ppm levels are noted.

### Contamination

{not applicable}

### Fluid Condition

{not applicable}

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Batch #	Client Info		<b>2023 10 0090</b>	---	---
Machine ID	Client Info		<b>A2310051</b>	---	---
Department	Client Info		<b>Production</b>	---	---
Sample From	Client Info		<b>Machine</b>	---	---
Production Stage	Client Info		<b>Initial</b>	---	---
Sent to WC	Client Info		<b>10/10/2023</b>	---	---
Sample Number	Client Info		<b>E30000499</b>	---	---
Sample Date	Client Info		<b>10 Oct 2023</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m) >20	<b>44</b>	---	---
Chromium	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >10	<b>6</b>	---	---
Lead	ppm	ASTM D5185(m) >20	<b>17</b>	---	---
Copper	ppm	ASTM D5185(m) >20	<b>125</b>	---	---
Tin	ppm	ASTM D5185(m) >10	<b>&lt;1</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---


## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<b>2</b>	---	---
Barium	ppm	ASTM D5185(m) 5	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185(m) 25	<b>7</b>	---	---
Calcium	ppm	ASTM D5185(m) 200	<b>48</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 300	<b>667</b>	---	---
Zinc	ppm	ASTM D5185(m) 370	<b>543</b>	---	---
Sulfur	ppm	ASTM D5185(m) 2500	<b>2199</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---



## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>14</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---


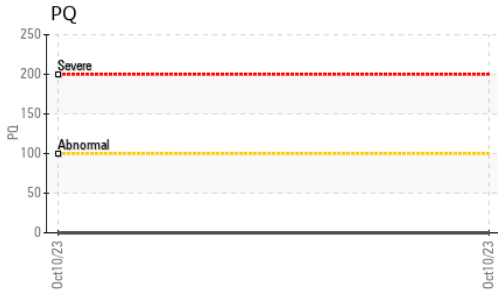
# OIL ANALYSIS REPORT



VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	LIGHT	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	MILKY	---
Odor	scalar	Visual*	NORML	NORML	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

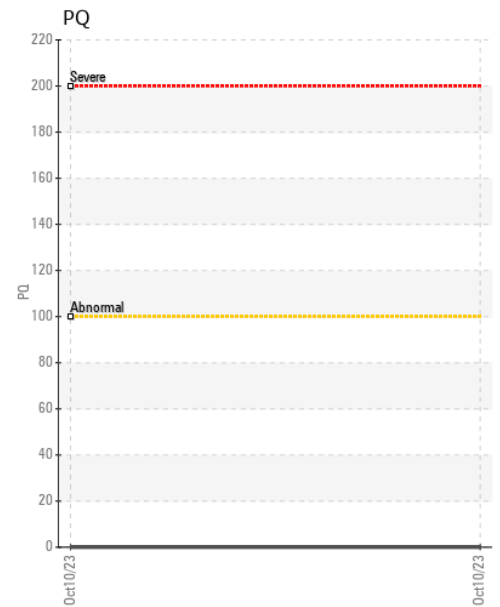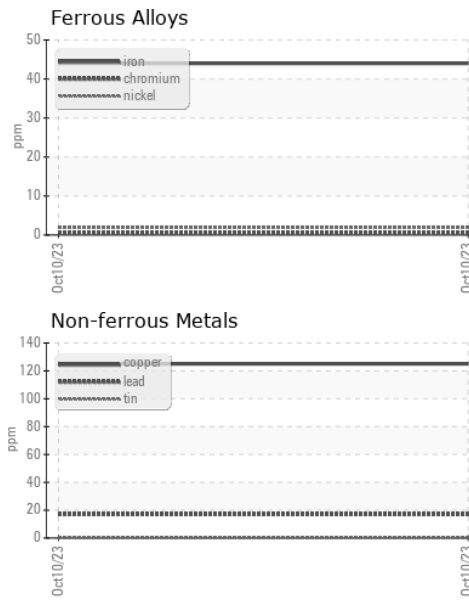

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : E30000499 **Received** : 12 Oct 2023  
**Lab Number** : **02588777** **Diagnosed** : 17 Oct 2023  
**Unique Number** : 5657843 **Diagnostician** : Tatiana Sorkina  
**Test Package** : TEST ( Additional Tests: Bottom, ICP, KF, PQ )

**Environmental 360 Solutions Ltd.**  
 640 Victoria Street  
 Cobourg, ON  
 CA K9A 5H5  
 Contact: Aylwin Lee  
 aylwinlee@e360s.ca  
 T: (905)372-2251  
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.