OIL ANALYSIS REPORT

Sample Rating Trend

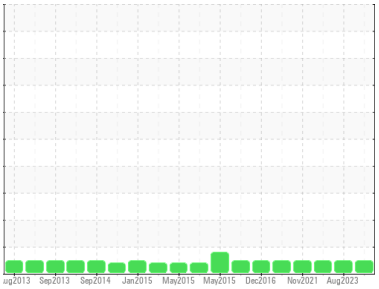

NORMAL

Machine Id
[SZF271] TRONAIR O5-3005-1100.83.16.8.3 SZF271
Component
Hydraulic System
Fluid
MILITARY MIL-L-5606A (13 GAL)

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor.

Wear
All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

Contaminants
There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Oil Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number		Client Info		**WC0833072**	WC0744620	WC0744622
Sample Date		Client Info		**11 Oct 2023**	01 Aug 2023	15 Jun 2023
TSN	hrs	Client Info		**0**	450	0
TSO	hrs	Client Info		**0**	450	0
Oil Age	hrs	Client Info		**0**	0	0
Oil Changed		Client Info		**N/A**	N/A	N/A
Sample Status				**NORMAL**	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	**<1**	<1	<1
Chromium	ppm	ASTM D5185(m)	>10	**0**	<1	0
Nickel	ppm	ASTM D5185(m)	>10	**<1**	0	0
Titanium	ppm	ASTM D5185(m)		**0**	0	0
Silver	ppm	ASTM D5185(m)		**<1**	0	0
Aluminum	ppm	ASTM D5185(m)	>10	**<1**	<1	<1
Lead	ppm	ASTM D5185(m)	>20	**0**	0	0
Copper	ppm	ASTM D5185(m)	>20	**1**	1	1
Tin	ppm	ASTM D5185(m)	>10	**0**	0	0
Antimony	ppm	ASTM D5185(m)		**0**	0	<1
Vanadium	ppm	ASTM D5185(m)		**0**	0	0
Beryllium	ppm	ASTM D5185(m)		**0**	0	0
Cadmium	ppm	ASTM D5185(m)		**0**	<1	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		**<1**	<1	<1
Barium	ppm	ASTM D5185(m)		**<1**	0	0
Molybdenum	ppm	ASTM D5185(m)		**0**	0	0
Manganese	ppm	ASTM D5185(m)		**0**	0	0
Magnesium	ppm	ASTM D5185(m)		**0**	<1	0
Calcium	ppm	ASTM D5185(m)		**<1**	<1	0
Phosphorus	ppm	ASTM D5185(m)		**407**	442	452
Zinc	ppm	ASTM D5185(m)		**4**	8	6
Sulfur	ppm	ASTM D5185(m)		**101**	121	127
Lithium	ppm	ASTM D5185(m)		**<1**	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	**1**	2	2
Sodium	ppm	ASTM D5185(m)		**<1**	0	0
Potassium	ppm	ASTM D5185(m)	>20	**<1**	<1	<1

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>128000	**54727**	15487	15573
Particles 15-25µm	count	NAS 1638	>22800	**746**	1067	1199
Particles 25-50µm	count	NAS 1638	>4050	**507**	607	514
Particles 50-100µm	count	NAS 1638	>720	**40**	73	15
Particles >100µm	count	NAS 1638	>128	**0**	0	0
NAS 1638	Class	NAS 1638	>9	**8**	7	7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		**0.09**	0.10	0.09

OIL ANALYSIS REPORT

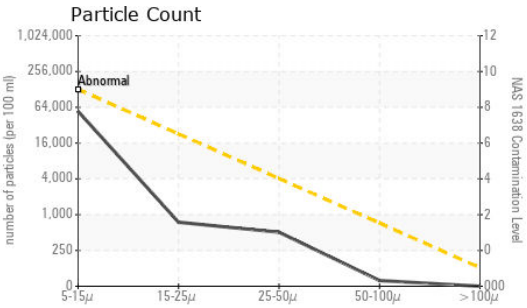

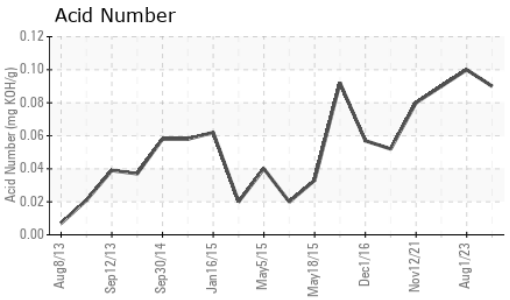

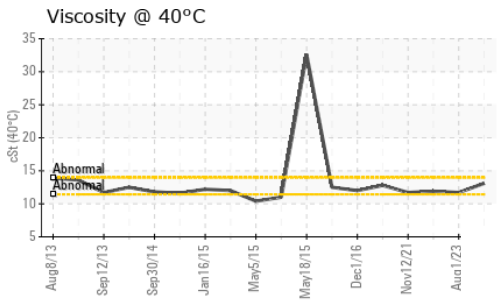

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	**NONE**	NONE	NONE
Precipitate	scalar	Visual*	NONE	**NONE**	NONE	NONE
Silt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Debris	scalar	Visual*	NONE	**NONE**	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	**NONE**	NONE	NONE
Appearance	scalar	Visual*	NORML	**NORML**	NORML	NORML
Odor	scalar	Visual*	NORML	**NORML**	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	**NEG**	NEG	NEG
Free Water	scalar	Visual*		**NEG**	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		**13.1**	11.7	11.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

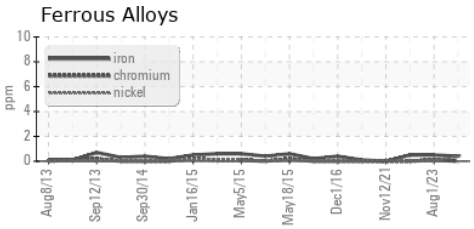

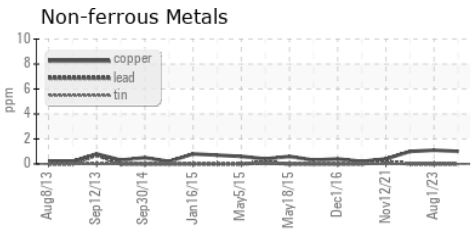

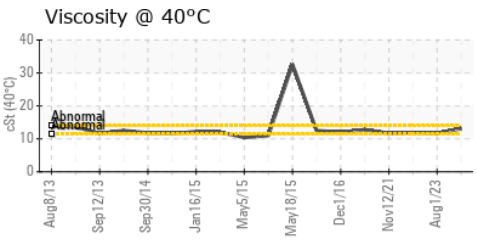

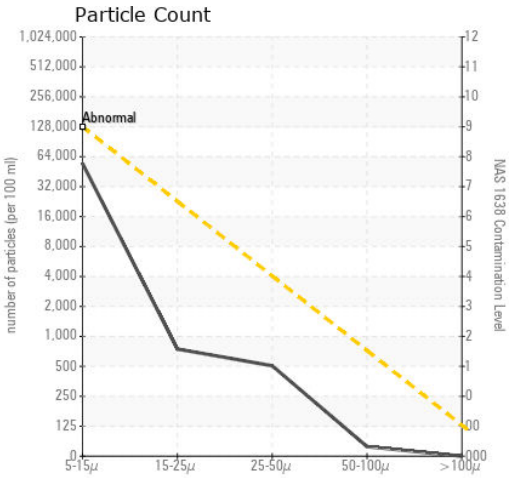

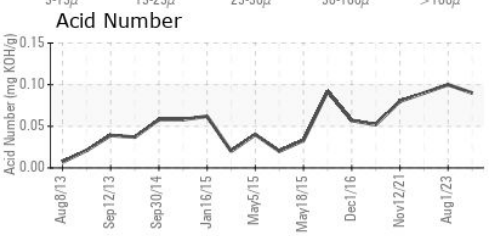

CALA Testing Accreditation No. 1005078
ISO 17025:2017 Accredited Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **SKYSERVICE BUSINESS AVIATION INC**
Sample No. : WC0833072 **Received** : 13 Oct 2023
Lab Number : 02588893 **Diagnosed** : 16 Oct 2023
Unique Number : 5657959 **Diagnostician** : Kevin Marson
Test Package : AVI 3 (Additional Tests: PrtCount)

6120 MIDFIELD ROAD
MISSISSAUGA, ON
CA L4W 2P7
Contact: Crew Chief
maintenance_yyz@skyservice.com
T: (416)399-4437
F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
Validity of results and interpretation are based on the sample and information as supplied.

FERROGRAPHY REPORT

Machine Id
[SZF271] TRONAIR O5-3005-1100.83.16.8.3 SZF271
Component
Hydraulic System
Fluid
MILITARY MIL-L-5606A (13 GAL)

Magn: 200x Illum: BC

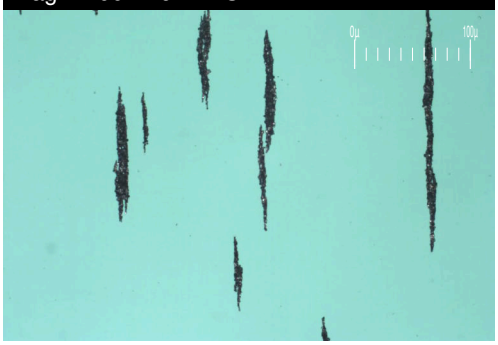

Magn: 50x Illum: RW

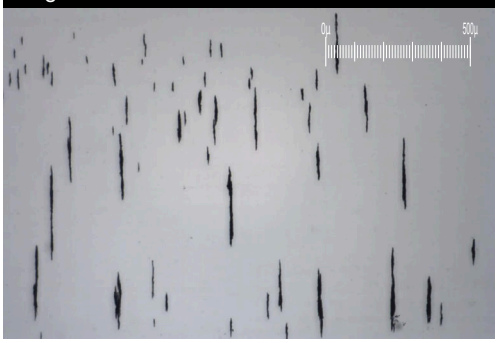

Magn: 100x Illum: RW

DR-FERROGRAPHY		method	limit/base	current	history1	history2
Large Particles		DR-Ferr*		**8.4**	0.3	5.5
Small Particles		DR-Ferr*		**7.1**	0.3	4.1
Total Particles		DR-Ferr*	>---	**15.5**	0.6	9.6
Large Particles Percentage	%	DR-Ferr*		**8.4**	0	14.6
Severity Index		DR-Ferr*		**11**	0	8

FERROGRAPHY		method	limit/base	current	history1	history2
Ferrous Rubbing	Scale 0-10	ASTM D7684*		**3**	2	2
Ferrous Sliding	Scale 0-10	ASTM D7684*				
Ferrous Cutting	Scale 0-10	ASTM D7684*				
Ferrous Rolling	Scale 0-10	ASTM D7684*		**1**	1	1
Ferrous Break-in	Scale 0-10	ASTM D7684*				
Ferrous Spheres	Scale 0-10	ASTM D7684*				
Ferrous Black Oxides	Scale 0-10	ASTM D7684*				
Ferrous Red Oxides	Scale 0-10	ASTM D7684*				
Ferrous Corrosive	Scale 0-10	ASTM D7684*				
Ferrous Other	Scale 0-10	ASTM D7684*				
Nonferrous Rubbing	Scale 0-10	ASTM D7684*				
Nonferrous Sliding	Scale 0-10	ASTM D7684*				
Nonferrous Cutting	Scale 0-10	ASTM D7684*				
Nonferrous Rolling	Scale 0-10	ASTM D7684*				
Nonferrous Other	Scale 0-10	ASTM D7684*				
Carbonaceous Material	Scale 0-10	ASTM D7684*				
Lubricant Degradation	Scale 0-10	ASTM D7684*				
Sand/Dirt	Scale 0-10	ASTM D7684*		**1**	1	1
Fibres	Scale 0-10	ASTM D7684*				
Spheres	Scale 0-10	ASTM D7684*				
Other	Scale 0-10	ASTM D7684*		**2**	1	1

WEAR

All component wear rates are normal. The direct-reading & analytical ferrographic results are normal indicating no abnormal wear in the system.

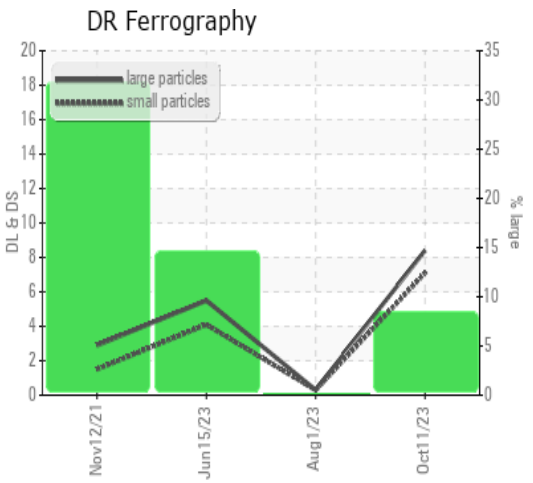

This page left intentionally blank