

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

SIKORSKY S76D SIKORSKY S76D

Component

Right Hydraulic System

MILITARY MIL-H-83282C (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

KY S76D						
				Oct2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0848797		
Sample Date		Client Info		06 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0		
Chromium	ppm	ASTM D5185(m)	>10	0		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		<1		
Aluminum	ppm	ASTM D5185(m)	>10	0		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>20	<1		
Tin	ppm	ASTM D5185(m)	>10	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		

Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		0		
Calcium	ppm	ASTM D5185(m)		0		
Phosphorus	ppm	ASTM D5185(m)		634		
Zinc	ppm	ASTM D5185(m)		<1		
Sulfur	ppm	ASTM D5185(m)		75		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	;	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	2		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		


Potassium	ppm	ASTM D5185(m)	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles 5-15µm	count	NAS 1638	>128000	25913		
Particles 15-25µm	count	NAS 1638	>22800	1612		
Particles 25-50µm	count	NAS 1638	>4050	337		
Particles 50-100µm	count	NAS 1638	>720	13		
Particles >100µm	count	NAS 1638	>128	45		
NAS 1638	Class	NAS 1638	>9	8		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.05

Acid Number (AN) mg KOH/g ASTM D974* 0.1



OIL ANALYSIS REPORT

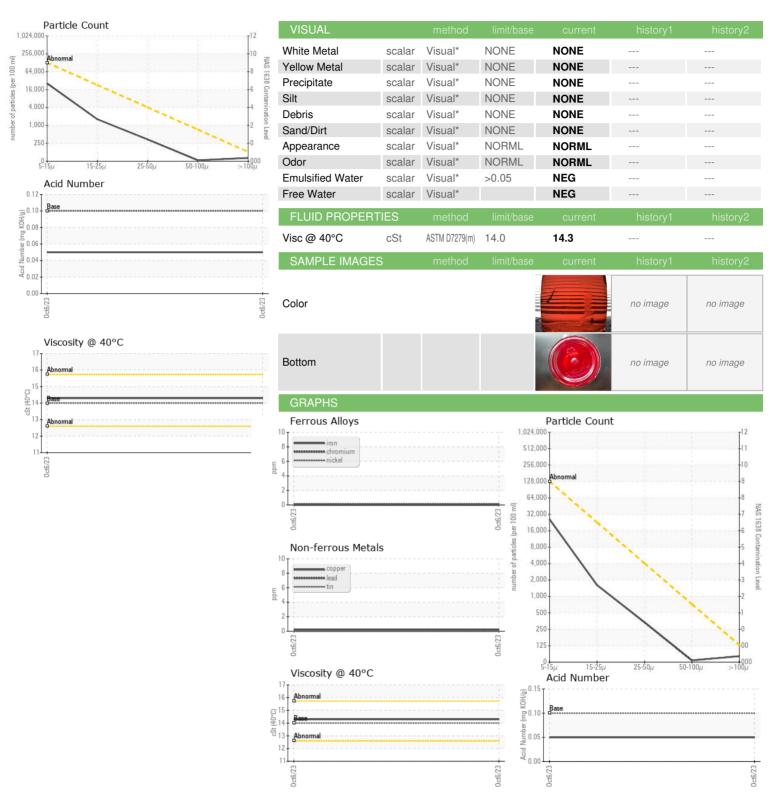



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No. Lab Number

Unique Number

: WC0848797 : 02589088

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received

Diagnosed : 5658154 Diagnostician : Kevin Marson

Test Package : IND 2 (Additional Tests: PrtCountNAS, TAN Man) To discuss this sample report, contact Customer Service at 1-800-268-2131.

: 13 Oct 2023

: 16 Oct 2023

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

FIG AIR Inc. 97 Airport Road Seguin, ON **CA P2A 2W8** Contact: Scott Jacklin SJacklin@figairinc.com T: (705)774-3270